



LASER EVO

Endless collection, endless comfort


iGuzzini

LASER EVO

design iGuzzini

Endless collection, endless comfort

With more than a million design options, Laser Evo brings the technological magic of Laser Blade and its visual comfort to a highly flexible and modular system, capable of adapting to any design requirement through a combination of shapes, sizes, finishes and optic technologies – whether lens or reflector. Designed for retail, hospitality and residential environments, it combines versatility, compactness, high-quality lighting and outstanding performance. With diameters ranging from Ø17 to Ø153 mm, luminous flux from 100 to 4000 lumens and IP65-rated versions, it is suitable for both intimate spaces and large-scale settings. In the larger diameters, the innovative Push&Go system (patent pending) allows refractors and optical accessories to be replaced quickly and safely, with a simple gesture. Intelligent lighting management, via DALI-2, Casambi or an invisible RF sensor integrated into a false ceiling, optimises visual comfort and energy efficiency. Smart services, such as push notifications via the Jiminy app, enhance interaction with spaces and people.

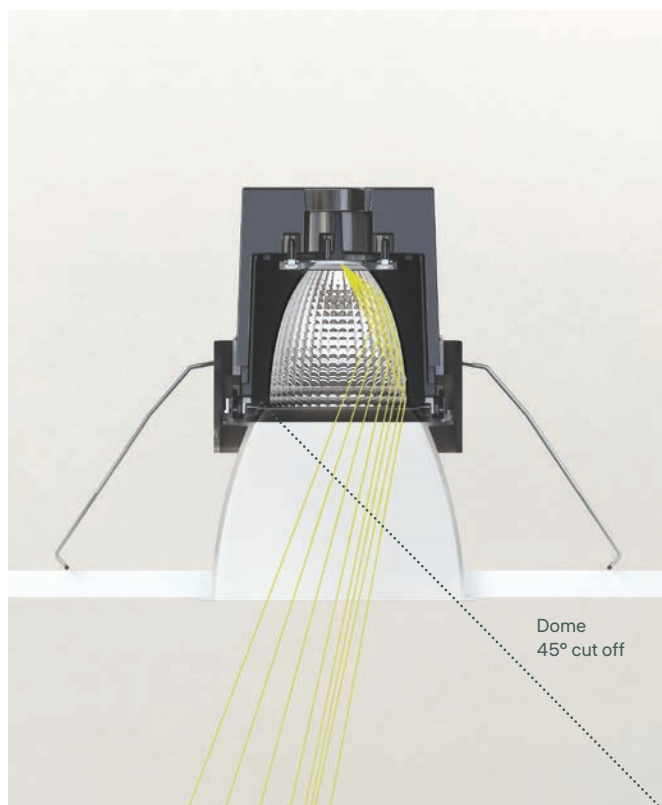

Super Comfort optics across the entire Laser Evo family for enhanced visual comfort.



Dual optical technology, lens or reflector, offering different lighting effects to meet specific application requirements with precise beam control and high efficiency, further expanded by Space and Wall Washer optics.

Available in 8 sizes and 5 versions —
Fixed, Adjustable, Tilted, Shallow and Wall Washer —
Laser Evo offers supercomfort Fixed configurations in the
following shapes: Cone, Dome, Dome Space, Soft, Soft
Space and Squirrel. All versions are compatible with smart
control systems.

1. Cone | 2. Squirrel | 3. Dome | 4. Soft
5. Dome Space | 6. Soft Space | 7. Wall Washer | 8. Tilted
9. Easy Adjustable | 10. Double Adjustable | 11. Shallow

1.



2.



3.



4.



5.



6.



7.



8.



9.



10.



11.



CONE up to 2630lm | up to 145 lm/W | Frame | Minimal

Ø 17 mm	Ø 25 mm	Ø 40 mm	Ø 59 mm	Ø 75 mm	Ø 96 mm	Ø 125 mm	Ø 153 mm
							
S	S M	SS S M F	SS S M F WF	SS S M F WF	SS S M F WF	SS S M F WF	SS S M F WF

DOME up to 2630lm | up to 145lm/W | Frame | Minimal

Ø 59 mm	Ø 75 mm	Ø 96 mm
		
SS S M F	SS S M F	SS S M F

DOME SPACE up to 2460lm | up to 134lm/W | Frame | Minimal

Ø 59 mm	Ø 75 mm	Ø 96 mm
		
SS S M F	SS S M F	SS S M F



SOFT up to 1110lm | up to 94lm/W | Frame

Ø 59 mm	Ø 75 mm
	
SS F	SS F

SOFT SPACE up to 1390lm | up to 118lm/W | Frame

Ø 59 mm	Ø 75 mm
	
SS S M F WF	SS S M F WF

SQUIRCLE up to 1150lm | up to 133lm/W | Frame

Ø 40 mm	Ø 59 mm	Ø 75 mm
		
SS S M F	SS S M F WF	SS S M F WF

LASER EVO

WALL WASHER up to 1310lm | up to 86lm/W | Frame | Minimal

Ø 40 mm



Ø 59 mm



Ø 75 mm



Ø 96 mm



Ø 125 mm




Ø 153 mm



TILTED up to 1560 lm | up to 132lm/W | Frame

Ø 59 mm



M | F

Ø 75 mm



S | M | F | WF

Ø 96 mm



S | M | F | WF

EASY ADJUSTABLE up to 1500lm | up to 111lm/W | Frame | Minimal

Ø 40 mm



SS | S | M | F

Ø 59 mm



SS | S | M | F

Ø 75 mm



SS | S | M | F | WF

Ø 96 mm



SS | S | M | F | WF

Ø 125 mm



SS | S | M | F | WF

Ø 153 mm



SS | S | M | F | WF

ADJUSTABLE PUSH&GO Frame | Minimal

Ø 125 mm



SS | S | M | F | WF


Ø 153 mm



SS | S | M | F | WF

DOUBLE ADJUSTABLE up to 1760lm | up to 130lm/W | Frame | Minimal

Ø 59 mm




SS | S | M | F | WF

Ø 75 mm



SS | S | M | F | WF

Ø 96 mm



SS | S | M | F | WF

SHALLOW up to 1500lm | up to 113lm/W | Frame

Ø 75 mm





M | F

Visit our website
for more information




OTHER VERSIONS AVAILABLE

													
	Ø 59				Ø 75				Ø 59			Ø 75	
CONE	•				•				•			•	
DOME	•				•				•			•	
TILTED									•			•	
EASY ADJUSTABLE									•			•	
DOUBLE ADJUSTABLE									•			•	

1. Ceiling light (Class III) without driver | 2. Ceiling light with driver | 3. Pendant, also available for LV tracks

FINISHES

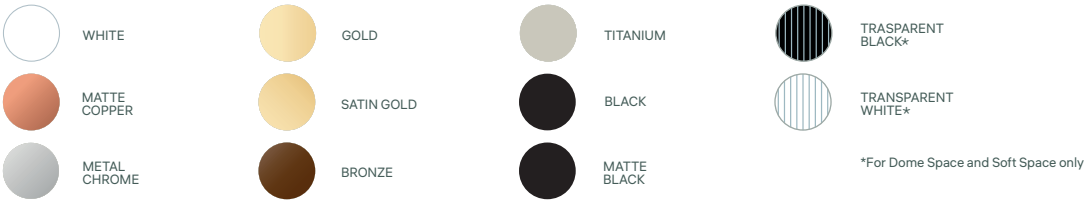

SMART CONTROLS

Laser Evo can adjust luminous flux via wired DALI, 0–10 V, or phase cut, as well as wirelessly via the Casambi protocol. DALI versions can also operate wirelessly using the external Organic Response lux/motion sensor Node or the HF (high-frequency) motion sensor, available with Organic Response or Casambi. Sensors optimise energy use by adapting lighting to actual needs.

Wired
DALI-2 / 0-10 V / Phase Cut /
On-Off



Wireless
Organic Response/
Casambi lux-motion Sensor



Wireless
Casambi



Wireless
Organic Response /
Casambi HF motion Sensor



2400K | 2700K | 3000K | 3500K
| 4000K | Tunable warm (1800K -
4000K available for sizes: Ø59, Ø75,
Ø96, Ø125, Ø153)

CRI90 | CRI97 | CRI90 HE

IP20 | IP44 | IP65 (available for
versions: Cone, Squircle, Dome,
Soft, Tilted, Double Adjustable, Easy
Adjustable)

Casambi | DALI-2 | ON/OFF | 0/1-10V
| Phase-cut | HF Organic Response
sensor | HF Casambi sensor

ORIENTABILITY: The adjustable
versions allow for a tilt of up to 35°
and a rotation of up to 358°, with
consistent lumen output levels across
both the fixed and adjustable.

SMART SERVICES

Jiminy - Push notification

Laser Evo with Organic Response
or Casambi can enable push
notifications on the Jiminy app,
in the form of text, audio or video.
This information appears on the
user's smartphone and provides
useful guidance, for example when
choosing what to buy in a shop.



App Jiminy

Space management

In systems with Organic Response
components, this function optimises
space management by monitoring
occupancy patterns, enabling routes
to be adapted according to user
behaviour and helping to reduce
energy consumption.



INTELLIGENT LIGHT SOLUTIONS

Smart controls: Organic Response
(control + sensor) | Quick BLE
(Casambi) | Quick DALI |
Master Pro Evo

Smart services: Space management |
Push notification



1. Flush trim kit | 2. Volcano trim kit | 3. Frames for multiple plates: 1x, 2x, 3x | 4. Heat sink
 5. LED | 6. Reflector / Lens | 7. Spacer ring | 8. Protective glass / Oval lens / Soft lens / Opti Beam refractor
 9. Coloured filters | 10. Honeycomb | 11. Mechanical support | 12. Cone | 13. Squircle | 14. Dome
 15. Dome Space | 16. Soft | 17. Soft Space | 18. Wall Washer | 19. Tilted | 20. Easy Adjustable
 21. Double Adjustable | 22. Shallow

