PRODUCT INDEX 2026

PRODUCT INDEX 2026



iGuzzini

INDOOR PRODUCTS

Downlights and recessed luminaires	4
Fixtures for mains voltage track	46
Fixtures for low voltage track	80
Pendants	126
Linear systems	172
Wall luminaires	196
Ceiling luminaires	224
Table and floor lamps	264
Emergency lighting	280
Lighting effect luminaires	290

OUTDOOR PRODUCTS

Pole and wall mounted systems	306
Pole and wall mounted multiple floodlights	342
Poles	358
Linear systems	368
Floodlights	376
Recessed in-ground luminaires	398
Recessed wall luminaires	410
Recessed ceiling luminaires	418
Bollards	428
Wall mounted luminaires	444
Ceiling mounted luminaires	462
Lighting effect luminaires	476

Intelligent Light Solutions	490



DOWNLIGHTS AND RECESSED LUMINAIRES



6 | LASER BLADE XS



10 | LASER BLADE



12 | LASER BLADE L



14 | CRYSTAL



16 | BLADE R



18 | EASY SPACE



20 | EASY



22 | REFLEX




24 | LASER EVO



28 | LASER



30 | TACK



31 | PIXEL PLUS



32 | TECNICA EVO

34 | LIGHT SHED 60

36 | IN60 EVO

38 | IN30

40 | IN30 EVO



43 | ISOLA

44 | IPLAN NEXT

45 | IPLAN ACCESS

LASER BLADE XS

design iGuzzini













HIGH CONTRAST
1 | 2 | 3 | 2×2 | 3×3 | 5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K | Tunable White
up to 3140lm
up to 125 lm/W
M | F | WF
Frame | Minimal
Fixed

WALL WASHER LGC
3 | 5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K | Tunable White
up to 930 lm
up to 45.1 lm/W
WW-LGC
Frame | Minimal
Fixed

WALL WASHER
3 | 5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K | Tunable White
Wall Washer
up to 1150lm
up to 56lm/W
Frame | Minimal
Fixed

GENERAL LIGHTING PRO
3×3 | 5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K
GL Pro
up to 2835lm
up to 109lm/W
Frame
Fixed



HIGH CONTRAST - ADJUSTABLE

1×5 | 1×10 | 1×15 | 2×5 | 2×10 | 2×15 cells
2700K | 3000K | 3500K | 4000K
up to 5729lm
up to 125lm/W
M|F
Frame
Adjustable - Tilting 30°

Other versions available

Fixtures for low voltage track p. 102



Laser Blade XS High Contrast for Filorail



Laser Blade XS Wall Washer LGC for Filorail

Laser Blade XS General Lighting Pro for Filorail



Laser Blade XS High Contrast pendant for Filorail



Laser Blade XS High Contrast - Low Voltage track



Laser Blade XS Wall Washer - Low Voltage Track

Laser Blade XS General Lighting Pro - Low Voltage track



Laser Blade XS High Contrast - Low Voltage track pendant

Laser Blade XS High Contrast for Superrail

Laser Blade XS Wall Washer LGC for Superrail

Laser Blade XS General Lighting Pro for Superrail

Ceiling luminaires p. 226

Laser Blade XS High Contrast - ceiling

Laser Blade XS Wall Washer - ceiling

Laser Blade XS General Lighting Pro - ceiling

Pendants p. 158



Laser Blade XS High Contrast pendant - ceiling

2700K | 3000K | 3500K | 4000K | Tunable White (2700K - 5700K)
CRI 80 | CRI90
IP 20 | IP43
8 sizes
Fixed | Adjustable
Frame | Minimal
Class II, III (Power supply to be ordered separately)
DALI-2

Intelligent Light Solutions

Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management | Push notification

Body finishes

- 01 White
- C1 Traffic white RAL9016
- B1 Signal white RAL9003
- 15 Grey
- 04 Black
- V0 Matte black

Optical finishes

- 01 White
- 04 Black
- 14 Gold
- E6 Burnished chrome

Other awards
Lighting Design Award 2017
Design L+B 2018
German Design Award 2019

Visit our website for more information

LASER BLADE XS

design iGuzzini



Minus 05 - Poperinge, Belgium — Product: Laser blade XS - High Contrast | Minimal | 10 cells | Black
Ph: FalkeKnoc



Link Group - Sidney — Product: Laser blade XS - Wall Washer | Frame | White/Black
Ph: Marcus Clinton

LASER BLADE

design iGuzzini



Villa Brattlie - NesØya, Norway — Product: Laser blade - High Contrast | Frame | 5 cells | White/Black
Ph: Tomasz Majewski



HIGH CONTRAST
1 | 2 | 5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K | Tunable White | Tunable Warm
up to 3723lm
up to 120lm/W
S | F | WF
Frame | Minimal
Fixed



OVAL
5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 2190lm
up to 103lm/W
MOL | WOL | WOT | ET
Frame
Fixed



SPACE
5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K | Tunable White | Tunable Warm
up to 3723lm
up to 120lm/W
WF
Frame | Minimal
Fixed



WALL WASHER
5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K | Tunable White
up to 1540lm
up to 50lm/W
WW
Frame | Minimal
Fixed



WALL WASHER LGC

5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K | Tunable White
up to 1170lm
up to 38 lm/W
WW
Frame | Minimal
Fixed



GENERAL LIGHTING PRO

5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K
up to 3336lm
up to 108 lm/W
GL-PRO
Frame
Fixed



HIGH CONTRAST - ADJUSTABLE

10 | 15 | 2×10 | 2×15 cells
2700K | 3000K | 3500K | 4000K
up to 7276lm
up to 120lm/W
S | F | WF
Frame
Adjustable - 30° titlting



LASER BLADE IN30 HIGH CONTRAST RECESSED

2×5 | 2×10 module
3000K | 4000K
up to 4131lm
up to 73lm/W
WF
Frame
Fixed

2700K | 3000K | 3500K | 4000K
Tunable White (2700K - 6500K) | Tunable Warm (2000K - 3500K)
CRI80 | CRI90 | CRI95
IP20 | IP43
5 sizes
Fixed | Adjustable
Frame | Minimal
Class II, III (Power supply to be ordered separately)
DALI-2

Intelligent Light Solutions

Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management | Push notification

Body finishes

- 01 White
- C1 Traffic white RAL9016
- B1 Signal white RAL9003
- 15 Grey
- 04 Black
- V0 Matte black

Optical finishes

- 01 White
- D8 White transparent
- 04 Black
- 83 Black transparent
- 14 Gold
- E6 Burnished chrome

reddot winner 2013
best of the best

DESIGN AWARD 2013

Other awards:
Lux Awards 2012
Futurshop 2012
Win World Interiors Awards 2013


Visit our website for more information

LASER BLADE L

design iGuzzini



Britannia Hotel - Trondheim, Norway — Product: Laser blade L - High Contrast | Frame | 2 cells | White
Ph: Tomasz Majewski



HIGH CONTRAST

1 | 2 | 3 cells
2700K | 3000K | 4000K
up to 3195lm
up to 112lm/W
M | F | WF
Frame | Minimal
Fixed



ADJUSTABLE

1 cell
2700K | 3000K | 4000K
up to 792lm
up to 88lm/W
S | M | F | WF
Frame | Minimal
Adjustable - Rotation 358° | Tilting 30° Rotation 358°



WALL WASHER

1 | 2 | 3 cells
2700K | 3000K | 4000K
up to 2066lm
up to 72lm/W
WW
Frame | Minimal
Fixed

2700K | 3000K | 4000K
CRI80 | CRI90
IP20 | IP44
3 sizes
Fixed | Adjustable
Frame | Minimal
Class II
DALI | DALI-2

Body finishes

01 White
04 Black

Optical finishes

01 White
15 Grey
04 Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

CRYSTAL

design iGuzzini





GENERAL LIGHT
3 | 6 | 9 cells
3000K | 3500K | 4000K | Tunable White
up to 4127lm
up to 155lm/W
F | WF | GL
Frame
Fixed



UGR<19
3 | 6 | 9 cells
3000K | 3500K | 4000K | Tunable White
up to 2390lm
up to 155lm/W
UGR<19
Frame
Fixed



OVAL
3 cells
3000K | 3500K | 4000K
up to 1186lm
up to 140lm/W (Class III)
WOL | WOT
Frame
Fixed



WALL WAHSER
3 | 6 | 9 cells
3000K | 3500K | 4000K | Tunable White
up to 3778lm
up to 130lm/W
WW
Frame
Fixed



Fiandre's historic headquarters - Castellarano, Italy — Product: Crystal - Wide Oval Longitudinal and General Lighting | 3 cells | Black transparent
Ph: Fabio Mantovani, courtesy of Fiandre

3000K | 3500K | 4000K | Tunable White (2700K - 6500K)
CRI80 | CRI90
IP20 | IP43
3 sizes
Fixed
Frame
Class II, III
DALI-2
Power supply accessory to be ordered separately (for the 3-cell version)

Intelligent Light Solutions

Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management | Push notification

Finishes

D8
White transparent

83
Black transparent

reddot winner 2023
best of the best

Other awards:
IES Progress Report 2023
Good Design 2023

Visit our website
for more information

BLADE R

design iGuzzini



Movistar team offices - Egüés, Spain — Product: Blade R - Blade R + Variable light | Ø170 mm | White/Black
Ph: Pablo García Esparza



Ø80 mm
2700K | 3000K | 3500K | 4000K
up to 1218lm
up to 84lm/W
M | F | WF
Frame | Minimal
Fixed



Ø125 mm
2700K | 3000K | 3500K | 4000K
up to 2465lm
up to 91lm/W
M | F | WF
Frame | Minimal
Fixed



Ø170 mm
2700K | 3000K | 3500K | 4000K
up to 3654lm
up to 93lm/W
M | F | WF
Frame | Minimal
Fixed



Ø170 mm DOUBLE
2700K | 3000K | 4000K
up to 5270lm
up to 93lm/W
M | F
Frame
Fixed



ADJUSTABLE LIGHT

Laser Ø59 mm for Blade R Ø125 mm | Laser Ø75 mm for Blade R Ø170 mm
2700K | 3000K
up to 1020lm
up to 85lm/W
M | F | WF
Frame | Minimal
Adjustable



PROFILED LIGHT

Palco framer Ø19 mm | Palco framer Ø37 mm
2700K | 3000K
up to 160lm
up to 25lm/W
Frame | Minimal
Framer




VARIABLE LIGHT

Easy Ø96 mm | Easy WW Ø96 mm
2700K | 3000K | 4000K | Tunable White
up to 1292lm
up to 107lm/W
WF | WW | GL
Frame | Minimal
Fixed



EMERGENCY LIGHT

for Blade R Ø170 mm
5000K
up to 220lm
Anti-Panic | Escape-Route
DALI monitoring



LOUDSPEAKER

for Blade R Ø170 mm
EN54 passive speaker
12 W 8 ohm / 12 W 100 V / 6 W 70 V



SMOKE DETECTOR

for Blade R Ø170 mm
Adapter for smoke detectors
For compatible smoke detectors visit iGuzzini website



CAMERA

for Blade R Ø170 mm
Axis FA4115 Camera adapter



DALI-2

for Blade R Ø170 mm
DALI-2 lux and motion sensor

2700K | 3000K | 3500K | 4000K
CRI80 | CRI90
IP20 | IP54
3 sizes
Fixed
Frame | Minimal
Class II
DALI-2 | DALI-2 sensor | DALI monitoring Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White
47 White / Black
14 Gold
41 White / Gold
E7 White / Burnished chrome
E6 Burnished chrome
43 Black / Black
04 Black

reddot winner 2020 best of the best

Other awards:
Progress Report Selection 2020
Red Dot Design Award (Innovative Products) 2020
Lux Awards 2020
Lighting Design Awards 2020
German Design Award 2022

Visit our website for more information

EASY SPACE

design iGuzzini





Story House Production offices - Berlin, Germany — Product: Easy space - UGR<19 | Ø212 mm | Black transparent
Ph: Luca Girardini









GENERAL LIGHT	UGR<19	UGR<19 - MICROFILM	WALL WASHER
Ø96 | Ø153 | Ø212 mm	Ø153 | Ø212 mm	Ø153 | Ø212 mm	Ø96 | Ø153 | Ø212 mm
3000K | 3500K | 4000K	3000K | 3500K | 4000K	3000K | 3500K | 4000K	3000K | 3500K | 4000K
up to 4929lm	up to 4515lm	up to 2581lm	up to 4452lm
up to 139lm/W	up to 127lm/W	up to 133lm/W	up to 123lm/W
Frame	Frame	Frame	Frame
Fixed	Fixed	Fixed	Fixed





SQUARE GENERAL LIGHTING
96×96 | 153×153 | 212×212 mm
3000K | 3500K | 4000K
up to 4455lm
up to 137lm/W
Frame
Fixed

SQUARE UGR<19
153×153 | 212×212 mm
3000K | 3500K | 4000K
up to 2254lm
up to 135lm/W
Frame
Fixed

3000K | 3500K | 4000K
CRI80 | CRI90
IP20 | IP54
3 sizes
Fixed
Frame
Class II
DALI-2
ON/OFF Emergency

Finishes

D8
White transparent

83
Black transparent

Intelligent Light Solutions
Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management | Push notification

Visit our website
for more information

EASY

design iGuzzini



Monterosa 91 - Milan, Italy — Product: Easy - General lighting | Ø96 mm | White
Ph: Michele Nastasi



GENERAL LIGHTING

Ø96 | Ø153 | Ø212 mm

3000K | 3500K | 4000K

up to 4664lm

up to 127lm/W

Frame

Fixed



UGR<19

Ø153 | Ø212 mm

3000K | 3500K | 4000K

up to 4410lm

up to 136lm/W

Frame

Fixed



UGR<19 - MICROFILM

Ø153 | Ø212 mm

3000K | 3500K | 4000K

up to 2447lm

up to 132lm/W

Frame

Fixed



WALL WASHER

Ø96 | Ø153 | Ø212 mm

3000K | 3500K | 4000K

up to 4399lm

up to 120lm/W

Frame

Fixed

Other versions available

Ceiling luminaires p. 232

Pendants p. 148

Emergency lighting p. 288



Easy ceiling



Easy pendant



Easy emergency lighting

3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP40 | IP54

3 sizes

Fixed

Frame

Class II

DALI-2

ON/OFF Emergency

Finishes



01
White

39
White/Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

REFLEX

design iGuzzini



Club Virgin Active Milano Bocconi - Milan, Italy — Product: Reflex - White reflector | Frame | Ø125 mm | White
Ph: Paolo Carlini



C.O.B. ROUND

Ø75 | Ø96 | Ø125 | Ø153 | Ø212 | Ø242 mm

2700K | 3000K | 4000K | Tunable White

up to 6424lm

up to 129lm/W

M | F | WF | VWF

Frame

Fixed



C.O.B. SUPER COMFORT ROUND

Ø125 | Ø212 mm

3000K | 4000K

up to 5120lm

up to 116lm/W

M | F | WF - UGR<10

Frame

Fixed



C.O.B. WALL WASHER

Ø96 | Ø125 | Ø153 | Ø212 mm

2700K | 3000K | 4000K

up to 3401lm

up to 95lm/W

WW

Frame | Minimal

Fixed



C.O.B. ADJUSTABLE ROUND

Ø75 | Ø96 | Ø125 | Ø153 | Ø212 mm

2700K | 3000K | 4000K

up to 3680lm

up to 105lm/W

M | F

Frame

Adjustable

2700K | 3000K | 4000K | Tunable White

CRI80 | CRI90

IP20 | IP54

6 sizes

Fixed | Adjustable

Frame | Minimal

Class II

DALI | DALI-2

Body finishes

01 White

04 Black

Optical finishes

01 White

39 White/Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

LASER EVO

design iGuzzini





FIXED - CONE

Ø17 | Ø25 | Ø40 | Ø59 | Ø75 | Ø96 | Ø125 | Ø153 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 2247lm

up to 117lm/W

SS | S | M | F | WF



FIXED - SQUIRCLE

Ø40 | Ø59 | Ø75 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 1339lm

up to 112lm/W

SS | S | M | F | WF



FIXED - DOME

Ø59 | Ø75 | Ø96 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 2247lm

up to 117lm/W

SS | S | M | F | WF



FIXED - DOME SPACE

Ø59 | Ø75 | Ø96 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 2247lm

up to 117lm/W

SS | S | M | F | WF



FIXED - SOFT

Ø59 | Ø75 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 1339lm

up to 112lm/W

SS | S | M | F | WF



FIXED - SOFT SPACE

Ø59 | Ø75 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 1339lm

up to 112lm/W

SS | S | M | F | WF



EASY ADJUSTABLE

Ø40 | Ø59 | Ø75 | Ø96 | Ø125 | Ø153 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 1750lm

up to 100lm/W

SS | S | M | F | WF



DOUBLE ADJUSTABLE

Ø40 | Ø59 | Ø75 | Ø96 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 1750lm

up to 100lm/W

SS | S | M | F | WF



TILTED

Ø59 | Ø75 | Ø96 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 1750lm

up to 100lm/W

M | F | WF



WALL WASHER

Ø40 | Ø59 | Ø75 | Ø96 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 1200lm

up to 81lm/W

WW



SHALLOW

Ø75 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90

up to 1250lm

up to 113lm/W

SS | S | M | F | WF



PROFESSIONAL P&G

Ø125 | Ø153 mm

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm

CRI90 | CRI97 | CRI90 HE

up to 2600lm

up to 120lm/W

SS | S | M | F | WF

LASER EVO

design iGuzzini



Other versions available

Pendants



Laser Evo pendant

Fixtures for low voltage track



Laser Evo pendant for Filorail



Laser Evo pendant for Low Voltage Track / Superrail

Ceiling luminaries



Laser Evo ceiling

2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm (1800K-4000K)

CRI90 | CRI95 | CRI97 | CRI90 HE

IP20 | IP44 | IP65

up to 8 sizes

Fixed | Adjustable (Rotation 358° - Tilting 35°)

Frame | Minimal (by accessories)

Class II |III (Power supply to be ordered separately)

Lens | Reflector

Casambi

DALI-2

ON/OFF

0/1-10V

Phase-cut

HF Organic Response sensor

HF Casambi sensor

Optical finishes

01 White

10 Metal chrome

14 Gold

E8 Gold-satin

69 Bronze

N8 Titanium

04 Black

V0 Matte black

V6 Matte copper

Optical finishes for Soft Space and Dome Space:

83 Black transparent

D8 White transparent

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

Laser evo: 6 sizes (Ø17/25/40/59/75/96mm) frame recessed available from March 2026, frameless recessed available from December 2026

Laser evo: 2 sizes (Ø125/153mm) recessed available from November 2026

Laser evo: 2 sizes (Ø59/75mm) pendant, ceiling, LV track and multiple available from November 2026

LASER

design iGuzzini



Songyuan House - Ancient City of Zhujiajiao, China — Product: Laser - Adjustable round | Minimal | Ø75 mm | Black
Ph: Wang Zilu



FIXED ROUND
Ø17 | Ø25 | Ø38 | Ø59 | Ø75 | Ø96 mm
2700K | 3000K | 3500K | 4000K
CRI80 | CRI90
up to 2138lm
up to 125lm/W
S | M | F | WF
Frame | Minimal



FIXED SQUARE
Ø59 | Ø75 mm
2700K | 3000K
CRI90
up to 1069lm
up to 106lm/W
M | F | WF
Frame | Minimal



ADJUSTABLE ROUND
Ø38 | Ø59 | Ø75 | Ø96 mm
2700K | 3000K | 3500K | 4000K
CRI90
up to 2147lm
up to 126lm/W
S | M | F | WF
Frame | Minimal



WALL WASHER ROUND
Ø38 | Ø75 | Ø96 mm
2700K | 3000K | 3500K | 4000K
CRI90
up to 1118lm
up to 79lm/W
WW
Frame | Minimal



Other versions available

Ceiling luminaires p. 230

Pendants p. 156

Fixtured for low voltage track p. 100



Laser ceiling



Laser pendant



Laser pendant for Filorail



Laser pendant for low voltage track

WALL WASHER SQUARE

Ø75 mm

2700K | 3000K

CRI90

up to 739lm

up to 73lm/W

WW

Frame | Minimal

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP44 | IP65

6 sizes

Fixed | Adjustable

Frame | Minimal

Class III (Power supply to be ordered separately)

UGR<10

ON/OFF

0/1-10V

DALI-2

Phase-cut

Emergency kit

Body finishes

01
White

04
Black

Optical finishes

01
White

14
Gold

E8
Gold-satin

E7
Chrome

E6
Burnished chrome

04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Other awards:
FX International Interior Design Award 2016

Visit our website
for more information

TACK

design iGuzzini



Ø60 mm RECESSED

3000K | 3500K | 4000K

up to 1766lm

up to 154lm/W

S | M | F | WF



Ø80 mm RECESSED

3000K | 3500K | 4000K

up to 3088lm

up to 172lm/W

SS | S | M | F | WF



Ø90 mm RECESSED

3000K | 3500K | 4000K

up to 4306lm

up to 176lm/W

SS | S | M | F | WF

Other versions available

Fixtures for mains voltage track p. 66

Ceiling luminaires p. 246

Pendants p. 155



Tack



Tack pendant



Tack ceiling



Tack pendant

3000K | 3500K | 4000K

CRI90

IP20 | IP40

3 sizes

Rotation 358° | Tilting 80°

Lens | Reflector

Class II

DALI-2

Finishes

01
White

V0
Matte black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

Tack: recessed available
from March 2026

PIXEL PLUS

design iGuzzini



LAC Lugano Art and Culture - Lugano, Switzerland — Product: Pixel Plus - Ø125 mm | Black
Ph: Paolo Carlini



DOWNLIGHT

Ø125 | Ø196 mm
3000K | 4000K
up to 4399lm
up to 123lm/W
M | F | WF
Frame
Adjustable

3000K | 4000K
CRI90
IP23
2 sizes
Adjustable
Frame
Rotation 365° | Tilting +40° -65°
Class II
DALI | DALI-2

Intelligent Light Solutions
Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Smart services:
Space management | Push notification

Finishes

01 White

04 Black

DESIGN AWARD 2002

Visit our website for more information

TECNICA EVO

design iGuzzini



Caffè Bistrot Euclide - Rome, Italy — Product: Tecnica Evo - Ø92 mm | Recessed | Black
Ph: Francesca Di Stefano Photography



Ø92 mm RECESSED

3000K | 4000K

up to 3393lm

up to 126lm/W

M | F | WF



Ø117 mm RECESSED

3000K | 4000K

up to 5263lm

up to 144lm/W

M | F | WF | VWF



Ø117 mm FOOD RECESSED

2700K | 3000K | 6500K

up to 3867lm

up to 96lm/W

F

Other versions available

Fixtures for mains voltage track p. 68

Pendants p. 154



Tecnica Evo



Tecnica Evo pendant



Tecnica Evo pendant

2700K | 3000K | 4000K | 6500K

CRI80 | CRI90

IP20

2 sizes

Adjustable

Rotation 359° | Tilting +60°-20°

Frame

Class II

DALI-2

ON/OFF

Finishes



01
White

04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

LIGHT SHED 60

design iGuzzini



University of Macerata. Loggia del Grano - Macerata, Italy — Product: Light Shed 60 - Recessed | UGR<19 | 600×600 mm | Grey
Ph: Studio Buschi



60 RECESSED


600×600 mm

3000K | 4000K | Tunable White

up to 3976lm

up to 139lm/W

UGR<19



60 DB RECESSED

600×600 mm

3000K | 4000K | Tunable White

up to 3274lm

up to 115lm/W

UGR<19



LINEN RECESSED

600×600 mm

3000K | 4000K | Tunable White

up to 3496lm

up to 123lm/W

UGR<19

Other versions available

Pendants p. 132



Light Shed 60
pendant

Smart accessories for Light Shed



Cover with
bracket for
external / semi-
recessed camera



Cover with
bracket for
recessed camera



Cover with
multi-sensor lux
and movement

3000K | 4000K |
Tunable White (2700K - 6500K)

CRI80 | CRI90

IP20 | IP43

1 size

Fixed

MPO (Micro Prismatic Optic)

Class II

Casambi

DALI-2

ON/OFF Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



01
White



15
Grey



07
Green



E8
Gold-satin



S0
Écru



16
Blue

Other awards:
Gold Certificate a "Les Grands Prix du Design" 2022
IES Progress Report 2023

Visit our website
for more information

IN60 EVO


design iGuzzini



MOL Campus - Budapest, Hungary — Product: iN60 Evo
Ph: HGEsch Photography

SYSTEM SPACE

White transparent | Black transparent
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K | Tunable White
up to 6059lm/m
up to 169lm/W
GL | UGR<19
Up & Down adjustable emission



SYSTEM MMO

Metalized Modular Optic
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K | Tunable White
up to 5696lm/m
up to 154lm/W
UGR<19

SYSTEM MPO

Micro Prismatic Optic
600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 1596lm/m
up to 141lm/W
UGR<19
Angular luminous module

SYSTEM OPAL

600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 4898lm/m
up to 147lm/W
GL
Angular luminous module

SYSTEM WALL WASHER

600 | 1200 mm

LED Module

3000K | 3500K | 4000K

up to 1642lm/m

up to 104lm/W

WW

Other versions available

Fixtures for mains voltage track p. 76 / Linear systems p. 180



iN60 Evo System Space



iN60 Evo System MMO

iN60 Evo System MPO

iN60 Evo System Opal



iN60 Evo Wall Washer

Pendants p. 137



iN60 Evo System Space



iN60 Evo System MMO

iN60 Evo System MPO

iN60 Evo System Opal



iN60 Evo System Wall Washer



iN60 Evo Stand-alone MMO

iN60 Evo Stand-alone MPO

iN60 Evo Stand-alone Opal



iN60 Evo Stand-alone Space

Smart accessories for iN60 Evo

Organic Response lux and motion sensor

Casambi lux and motion sensor

DALI-2 lux and motion sensor



Casambi-DALI control interface



Li-Fi transceiver module

3000K | 3500K | 4000K | Tunable White (2700K - 6500K)

CRI80 | CRI90

IP20

GL | UGR<19 | WW

Up & Down | Down emission | Up & Down indipendent control

Class I

Organic Response (control + sensor)

Casambi | Casambi sensor | Casambi HF sensor

DALI-2 | DALI-2 sensor

Li-Fi

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

04 Black

12 Aluminium

Visit our website for more information

IN30

design iGuzzini



Klöckner & CO office - Duisburg, Germany — Product: iN30 - Low Contrast and High Contrast | White
Ph: Jens Kirchner



Other versions available

Ceiling luminaires p. 252

Pendants p. 140

iN30 ceiling Low Contrast



iN30 ceiling High Contrast

iN30 pendant Low Contrast



iN30 pendant High Contrast

Linear systems p. 174

iN30 ceiling Low Contrast



iN30 ceiling High Contrast

iN30 pendant Low Contrast



iN30 pendant High Contrast

RECESSED LOW CONTRSAT

1200 | 2400 | 600×600 mm
3000K | 4000K
up to 4081lm
up to 107lm/W
GL
Frame
CRI80

RECESSED HIGH CONTRAST

1200 mm (2×5 cells) | 1400 mm (2×10 cells)
3000K | 4000K
up to 4131lm
up to 90lm/W
WF
Frame
CRI90 | CRI95

3000K | 4000K
CRI80 | CRI90 | CRI95
IP20

2 Other versions available

Fixed
Frame
Class I
DALI-2

Finishes

01 White

04 Black

12 Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

IN30 EVO

design iGuzzini



Wargaming Office - Nicosia, Cyprus — Product: iN30 Low contrast and High contrast | White
Ph: Maria Efthymiou



SYSTEM OPAL

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1700lm/m
up to 102lm/W
GL
Frame | Minimal
CRI80 | CRI90



SYSTEM HIGH CONTRAST

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 2500lm/m
up to 95lm/W
S | F | WF | VWF
Frame | Minimal
CRI90

SYSTEM WALL WASHER

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1250lm/m
up to 85lm/W
WW
Frame | Minimal
CRI80 | CRI90

3000K |3500K | 4000K | Tunable White
CRI80 | CRI90 | CRI95
IP20
System | Stand-alone
Recessed | Surface mounted | Pendant
Class I
Organic Response (control + sensor)
Casambi | Casambi sensor | Casambi HF sensor
DALI-2 | DALI-2 sensor
Li-Fi

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Finsh

01 White
04 Black
12 Aluminium

Visit our website for more information

iN30 EVO available from September 2026

ISOLA

design iGuzzini



Santini Spa headquarters - Bergamo, Italy — Product: Isola - UGR<19 | Ø600 mm | White
Ph: Paolo Carlini



RECESSED

Ø600 | Ø900 | Ø1200 mm

3000K | 4000K | Tunable White

up to 24678lm

up to 153lm/W

GL | UGR<19

Other versions available

Ceiling luminaires p. 234

Isola ceiling

Pendants p. 160



Isola pendant

Wall luminaires p. 212

Isola wall

3000K | 4000K | Tunable White

CRI80 | CRI90

IP20 | IP40

3 Sizes

Class II

GL | UGR<19

Up & Down | Down emission

DALI-2

Finishes

01
White

04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

IPLAN NEXT

design iGuzzini

SQUARE RECESSED
600×600 | 625×625 mm
up to 4700lm
up to 160lm/W
UGR<19

RECTANGULAR RECESSED
1200×300 mm
up to 4700lm
up to 160lm/W
UGR<19

Other versions available

Ceiling luminaires p. 257

iPlan Next square ceiling mounted

iPlan Next rectangular ceiling mounted

Pendants p. 165



iPlan Next square pendant



iPlan Next rectangular pendant

3000K | 4000K
CRI90
IP20 | IP40
3 sizes
Class II
UGR<19
Organic Response (control + sensor)
Casambi | Casambi sensor
DALI-2 | DALI-2 sensor
ON/OFF

Finish

01
White

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor) | Quick BLE (Casambi) | Quick DALI | Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

iPlan Next: ON/OFF, Casambi available from May 2026

IPLAN ACCESS

design iGuzzini

SQUARE RECESSED
600×600 | 625×625 mm
up to 3700lm
up to 117lm/W
GL | UGR<19
Frame
Fixed

RECTANGULAR RECESSED
1200×300 mm
up to 3600lm
up to 111 lm/W
GL | UGR<19
Frame
Fixed

Other versions available

Ceiling luminaires p. 256

iPlan Access square ceiling mounted

iPlan Access rectangular ceiling mounted

Pendants p. 164



iPlan Access square pendant



iPlan Access rectangular pendant

3000K | 4000K
CRI80 | CRI90
IP20 | IP40
3 sizes
Class II
GL | UGR<19
DALI-2
Lux and motion sensor

Finish

01
White

Intelligent Light Solutions
Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Smart services:
Space management | Push notification

Visit our website for more information



FIXTURES FOR MAINS VOLTAGE TRACK



48 | SIPARIO



52 | PALCO/PALCO PRO



58 | VIEW



60 | NEWFO



62 | LE PERROQUET



66 | TACK



68 | TECNICA EVO



70 | BETWO



72 | SPACEPAD



74 | LIGHT SHED 14

76 | IN60 EVO



78 | MAINS VOLTAGE TRACK

SIPARIO

design iGuzzini













Ø56	**Ø73**	**Ø86**	**Ø122**
up to 1186lm	up to 2162lm	up to 2376lm	up to 3872lm
up to 79lm/W	up to 105 lm/W	up to 112lm/W	up to 111lm/W
S | M | F | WF | VWF	S | M | F | WF | VWF	S | M | F | WF | VWF	SS | S | M | F | WF | VWF
Opti Beam Lens | Opti Beam Refractor	Opti Beam Reflector | Opti Beam Lens | Opti Beam Refractor	Opti Beam Reflector | Opti Beam Lens | Opti Beam Refractor	Opti Beam Reflector | Opti Beam Lens | Opti Beam Refractor



WALL WASHER Ø56

up to 1015lm

up to 67lm/W

WW

Opti Beam Lens | Opti Beam Refractor



WALL WASHER Ø73

up to 1198lm

up to 70lm/W

WW

Opti Beam Reflector |
Opti Beam Lens | Opti Beam Refractor



WALL WASHER Ø86

up to 1500lm

up to 83lm/W

WW

Opti Beam Reflector |
Opti Beam Lens | Opti Beam Refractor



WALL WASHER Ø122

up to 2325lm

up to 79lm/W

WW

Opti Beam Reflector |
Opti Beam Lens | Opti Beam Refractor



FRAMER Ø40

up to 35lm

9W

12°



ZOOM FRAMER Ø86

up to 960lm

20W

20° ÷ 32°



BEAMER Ø40

up to 400lm

10W

8.5° ÷ 56.5°



BEAMER Ø86

up to 1456lm

20W

13° ÷ 56°



RGBW Ø122

up to 1800lm

up to XXlm/W

M | F | WF | VWF

Opti Beam Lens |
Opti Beam Refractor

RGBW (White 3000K)

SIPARIO

design iGuzzini



Other versions available

Fixtures for low voltage track p. 82

Wall luminaires p. 202 / Ceiling luminaires p. 236



Sipario Low Voltage



Sipario Low Voltage Wall Washer



Sipario Low Voltage with rod



Sipario Low Voltage Framer



Sipario Low Voltage Beamer




Sipario surface



Sipario recessed

ACCESSORIES OPTI BEAM REFRACTOR

1 Optibeam refractors
2 Honeycomb light flap
3 Cylindrical screen
4 Shutter blade
5 Directional flaps

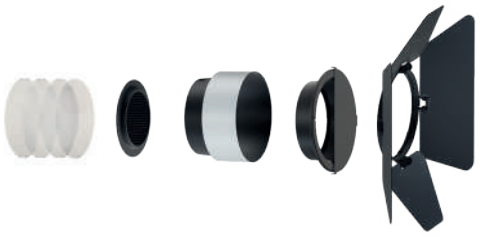

1 2 3 4 5

2700K | 3000K | 3500K | 4000K | Tunable White | RGBW

CRI90 | CRI97

IP20

5 sizes

Adjustable - Rotation 360° | Tilting 90°

Opti Beam Reflector | Opti Beam Lens | Opti Beam Refractor

Class I, II

Casambi

DALI-2

Manual Dim

Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

V0 Matte black

Visit our website for more information

PALCO / PALCO PRO

design Artec Studio





C.P. Hart Showroom Waterloo-London, United Kingdom — Product: Palco - Palco | Ø102 mm | Black
Ph: James Newton



PALCO PRO Ø62 mm
up to 1366lm
up to 70lm/W
SS | S | M | F | WF | WW
Opti Beam Lens | Opti Beam Refractor
Class I, II



PALCO PRO Ø86 mm
up to 1776lm
up to 96lm/W
SS | S | M | F | WF | WW
Opti Beam Lens | Opti Beam Refractor
Class I, II



PALCO PRO Ø102 mm
up to 1978lm
up to 99lm/W
SS | S | M | F | WF | WW
Opti Beam Lens | Opti Beam Refractor
Class I, II



PALCO PRO Ø122 mm
up to 2736lm
up to 93lm/W
SS | S | M | F | WF | WW
Opti Beam Lens | Opti Beam Refractor
Class I, II



PALCO Ø62 mm

up to 1659lm

up to 99lm

SS | S | M | F | WF

Opti Beam Reflector | Opti Beam Lens

Class II



PALCO Ø86 mm

up to 2605lm

up to 106lm

SS | S | M | F | WF

Opti Beam Reflector | Opti Beam Lens

Class II



PALCO Ø102 mm

up to 2413lm

up to 91lm/W

SS | S | M | F | WF

Opti Beam Reflector | Opti Beam Lens

Class I



PALCO Ø122 mm

up to 3393lm

up to 108lm/W

SS | S | M | F | WF

Opti Beam Reflector | Opti Beam Lens

Class I



PALCO Ø142 mm

up to 6429lm

up to 114lm/W

SS | S | M | F | WF

Opti Beam Reflector

Class I



PALCO WALL WASHER Ø86 mm

up to 1369lm

up to 56lm/W

WW

Opti Beam Lens

Class II



PALCO WALL WASHER Ø102 mm

up to 1248lm

up to 47lm/W

WW

Opti Beam Lens

Class I



PALCO WALL WASHER Ø122 mm

up to 1806lm

up to 57lm/W

WW

Opti Beam Lens

Class I



PALCO WALL WASHER Ø142 mm

up to 3463lm

up to 61lm/W

WW

Opti Beam Lens

Class I



PALCO FRAMER Ø37 mm

up to 38lm

Framer

Gobo 5° - 10°

Class II

M | F | WF



PALCO FRAMER Ø99 mm

up to 828lm

Framer

Gobo 30° - 40°

Class II

M | F | WF



PALCO FRAMER Ø115 mm

up to 1344lm

Framer

Gobo 30° - 40°

Class I

M | F | WF

PALCO / PALCO PRO

design Artec Studio



Istanbul Modern Museum - Istanbul, Turkey — Product: Palco - Palco | Palco Wall Washer | Ø122 mm | White
Ph: Cemal Emden



RINASCENTE - Florence, Italy — Product: Palco - Palco | Ø102 mm | White
Ph: Paolo Bramati

PALCO / PALCO PRO

design Artec Studio

Other versions available

Fixtures for low voltage track p. 86



Palco Low Voltage for Filorail



Palco Low Voltage Framer for Filorail



Palco Low Voltage Wall Washer for Filorail



Palco Low Voltage



Palco Low Voltage Wall Washer

Wall and ceiling luminaires p. 204




Palco surface



Palco Profilatore surface




Palco recessed



Palco Framer reccessed

ACCESSORIES OPTI BEAM REFRACTOR

1 Interchangeable reflector
2 Refractor for medium elliptical distribution
3 Refractor for broad elliptical distribution
4 Soft Lens Filter
5 Honeycomb louvre
6 Cylindrical screen
7 Directional fins.

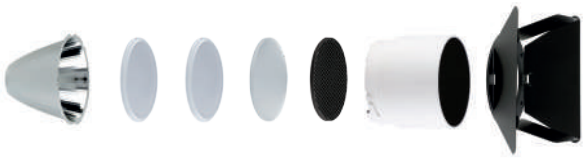

1 2 3 4 5 6 7

ACCESSORIES OPTI BEAM LENS

8 Opti Beam Refractor Medium
9 Opti Beam Refractor Flood
10 Opti Beam Refractor Wide Flood
11 Refractor for medium elliptical distribution
12 Refractor for broad elliptical distribution
13 Honeycomb louvre



8 9 10 11 12 13

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90 | CRI97

IP20 | IP40

Class I, II

Opti Beam Reflector |
Opti Beam Lens | Opti Beam Refractor

DALI-2 | Casambi | Manual Dim

Casambi

Manual Dim

Finishes

01
White

04
Black

Other awards
Premio dei premi per l'innovazione 2018
CODEGA 2018
German Design Award 2018
Delta award 2018
Progress Report Selection 2020

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Visit our website
for more information

VIEW

design iGuzzini/Arup



Inside Out Centre for the Arts - Johannesburg, South Africa — Product: View
Ph: Brandon Barnard



130×110 mm
3000K | 4000K
up to 1530lm
up to 110lm/W
VWF



170×126 mm
3000K | 4000K
up to 3159lm
up to 113lm/W
VWF



210×146 mm
3000K | 4000K
up to 3813lm
up to 111lm/W
VWF



WALL WASHER 130×110 mm
3000K | 4000K
up to 1224lm
up to 89lm/W
WW



WALL WASHER 170×126 mm

3000K | 4000K

up to 2810lm

up to 101lm/W

WW



WALL WASHER 210×146 mm

3000K | 4000K

up to 3266lm

up to 95lm/W

WW

Other versions available

Wall luminaires p. 200



View
wall mounted

3000K | 4000K

CRI80 | CRI90 | CRI97

IP20

5 sizes

Rotation 360° | Tilting 90°

Class I, II

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification


Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Finishes



04
Black

47
White/Black

reddot winner 2017
best of the best

DESIGN AWARD 2017

Other awards
German Design Award 2019

Visit our website
for more information

NEWFO

design iGuzzini













Ø88 mm FOR MAINS VOLTAGE TRACK
up to 1818lm
up to 101lm/W
S | M | F | WF
Class II
DALI-2 | Casambi

Ø116 mm FOR MAINS VOLTAGE TRACK
up to 2519lm
up to 105lm/W
M | F | WF
Class II
DALI-2 | Casambi

PENDANT Ø88 mm FOR MAINS VOLTAGE TRACK
up to 1818lm
up to 101lm/W
M | F | WF
Class II
DALI-2 | Casambi

PENDANT Ø116 mm FOR MAINS VOLTAGE TRACK
up to 2519lm
up to 105lm/W
F | WF
Class II
DALI-2 | Casambi

Other versions available

Fixtures for low voltage track p. 94



Newfo Low Voltage for Filorail



Newfo Low Voltage pendant for Filorail



Newfo Low Voltage



Newfo Low Voltage pendant



Newfo Low Voltage for Superrail



Newfo Low Voltage pendant for Superrail

Ceiling luminaires



Newfo surface



Newfo surface pendant



Newfo recessed



Newfo recessed pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP43

Spot: Rotation 360° | Tilting 90°
Pendant: Rotation 360° | Tilting 350°

Optibeam Reflector |
Optibeam Lens | Optibeam Refractor

Class II

Casambi

DALI-2

Body finishes

01 White

04 Black

N8 Titanium

Optical finishes

04 Black

N8 Titanium

U7 Brass

V6 Matte copper

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

reddot winner 2025
best of the best

Visit our website
for more information

LE PERROQUET

design Piano Design



Private office - Chicago, USA — Product: Le Perroquet - Pendant | Ø156 mm | Grey/Black
Ph: Nic Lehoux



Ø89 mm

up to 1768lm

up to 79lm/W

M | F | WF



Ø156 mm

up to 3665lm

up to 98lm/W

S | F | WF



Ø162 mm

up to 4305lm

up to 99lm/W

M | F | WF



PENDANT Ø89 mm

up to 1768lm

up to 79lm/W

M | F | WF



PENDANT Ø156 mm

up to 3665lm

up to 97lm/W

S | F | WF



PENDANT Ø162 mm

up to 4305lm

up to 99lm/W

M | F | WF

LE PERROQUET

design Piano Design



Marina Temple - Mexico City, Mexico — Product: Le Perroquet - Pendant | Ø156 mm | Grey/Black
Ph: Jaime Navarro

Other versions available

Fixtures for low voltage track p. 98

Wall luminaries p. 208

Pendants p. 150

Ceiling luminaires p. 242



Le Perroquet for Filorail track



Le Perroquet pendant for Filorail



Le Perroquet wall/ceiling



Le Perroquet pendant



Le Perroquet wall/ceiling



Le Perroquet recessed



Le Perroquet surface



Le Perroquet surface pendant

ACCESSORIES

1 Refractor for elliptical distribution
2 Cylindrical screen
3 Directional fins



1



2



3

3000K
CRI90
IP20 | IP40
3 sizes
OptiBeam Reflector
Class I
DALI-2
Spot: Rotation 360° | Tilting 90°
Pendant: Rotation 328° | Tilting 100°

Finishes



01
White



74
Grey/Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management |
Push notification

Smart Acessories for MV Track

Organic Response (control + sensor)
Casambi Sensor
Casambi - DALI interface

Visit our website
for more information

TACK

design iGuzzini











Ø60 mm
3000K | 3500K | 4000K
up to 1766lm
up to 153lm/W
S | M | F | WF

Ø80 mm
3000K | 3500K | 4000K
up to 3088lm
up to 171lm/W
SS | S | M | F | WF

Ø90 mm
3000K | 3500K | 4000K
up to 4352lm
up to 177lm/W
SS | S | M | F | WF



Ø60 mm PENDANT

3000K | 3500K | 4000K

up to 1766lm

up to 153lm/W

S | M | F | WF



Ø80 mm PENDANT

3000K | 3500K | 4000K

up to 3088lm

up to 171lm/W

SS | S | M | F | WF



Ø90 mm PENDANT

3000K | 3500K | 4000K

up to 4352lm

up to 177lm/W

SS | S | M | F | WF

Other versions available


Downlights and recessed luminaires p.30

Pendants p. 155

Ceiling luminaires p. 246



Tack recessed



Tack pendant



Tack ceiling

ACCESSORIES OPTI BEAM REFRACTOR

1 Honeycomb light flap
2 Transparen protective screen
3 Refractor for elliptical distribution
4 Soft lens filter
5 Accessory stop



1 2 3 4 5

3000K | 3500K | 4000K

CRI90

IP20 | IP40

3 sizes

Spot: Rotation 360° | Tilting 90°
Pendant: Rotation 360° | Tilting 180°

Lens | Reflector

Class I

DALI-2

ON/OFF

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Finishes

01
White

V0
Matte black

Visit our website
for more information

TECNICA EVO

design iGuzzini



Seville Nautical Club - Seville, Spain — Product: Tecnica Evo - Ø92 mm | White
Ph: Courtesy of Jacinto Pérez Elliot Arquitectura



Ø92 mm
3000K | 4000K
up to 3487lm
up to 132lm/W
M | F | WF



Ø117 mm
3000K | 4000K
up to 5263lm
up to 143lm/W
M | F | WF | VWF



Ø117 mm FOOD
2700K | 3000K | 6500K
up to 3867lm
up to 127lm/W
F



Ø92 mm PENDANT
3000K | 4000K
up to 3506lm
up to 126lm/W
M | F | WF






Ø117 mm PENDANT
3000K | 4000K
up to 5263lm
up to 137lm/W
M | F | WF | VWF

Ø117 mm FOOD PENDANT
2700K | 3000K | 6500K
up to 3849lm
up to 101lm/W
F

Other versions available

Downlights and recessed luminaires p. 32



Tecnica Evo recessed

Pendants p. 154



Tecnica Evo pendant

ACCESSORIES

1 Interchangeable reflector
2 Safety glass
3 Refractor for elliptical distribution
4 Soft Lens Filter
5 Honeycomb louvre



1 2 3 4 5

2700K | 3000K | 4000K | 6500K
CRI80 | CRI90
IP20
2 sizes
Spot: Rotation 360° | Tilting 90° Pendant: Rotation 360° | Tilting 90°
Reflector
Food version
Class I
DALI-2
ON/OFF

Intelligent Light Solutions
Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Smart services:
Space management | Push notification

Smart Acessories for MV Track
Organic Response (control + sensor)
Casambi Sensor
Casambi - DALI interface

Finishes

01 White

04 Black

Visit our website for more information

BETWO

design Alfonso Femia/AF*design





Product: Betwo - Pendant | UGR<19 | White champagne/White transparent
Ph: Paolo Carlini



GENERAL LIGHTING

Ø172 | Ø234 mm

up to 4354lm

up to 122lm/W

DALI-2



UGR<19

Ø172 | Ø234 mm

up to 2447lm

up to 122lm/W

DALI-2



PURE GENERAL LIGHTING

Ø172 | Ø234 mm

up to 4324lm

up to 122lm/W

DALI-2



Other versions available

Pendants p. 152

Ceiling luminaires p. 228



BeTwo pendant



BeTwo ceiling

3000K | 3500K | 4000K

CRI90

IP40

2 sizes

Opti Diamond

Class I

DALI-2

Adapter for installation on track to be order separately

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Optical finish

D8 White

Body finishes

G0 White/White

G2 Black/Black

I1 White/Champagne

I3 Black/Champagne

R4 White/Transparent

R5 Black/Transparent

R6 Champagne/Transparent

Optical finish

D8 Black

Body finishes

G1 White/White

I2 Black/Black

I4 White/Champagne

M6 Black/Champagne

R7 White/Transparent

R8 Black/Transparent

R9 Champagne/Transparent

reddot winner 2024
best of the best

DESIGN AWARD 2024

Visit our website for more information

SPACEPAD

design iGuzzini



Tenoha - Milan, Italy — Product: Spacepad - UGR<19 | 415×140 mm | Matte black/ White transparent
Ph: Paolo Carlini



GENERAL LIGHTING

415×140 mm

up to 4350lm

up to 164lm/W

Opti Diamond



UGR<19

415×140 mm

up to 2480lm

up to 166lm/W

Opti Diamond



GENERAL LIGHTING 880×140 mm

880×140 mm

up to 8734lm

up to 170lm/W

Opti Diamond



UGR<19 880×140 mm

880×140 mm

up to 5611lm

up to 176lm/W

Opti Diamond

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90

IP20

2 sizes

Adjustable

Rotation 360°

Opti Diamond

Class I


Organic Response (control + sensor)

Casambi

DALI-2

DALI-2 sensor

Body finishes



01
White

V0
Matte black

Optical finishes



D8
White transparent



83
Black transparent

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Visit our website
for more information

LIGHT SHED 14

design iGuzzini





Park Associati Studio - Milan, Italy — Product: Light shed 14 - Pendant | 1200 mm | White/ White transparent
Ph: Paolo Carlini



TRACK

1200 | 1600 | 2400 | 3000 mm

up to 6500lm

up to 147lm/W

UGR<19

Opti Diamond

Class I

DALI-2

Other versions available

Pendants p. 130



Light Shed 14
pendant

Ceiling luminaries p. 247

Light Shed 14
ceiling

3000K | 4000K

CRI80 | CRI90

IP20

4 lenghts

Opti Diamond - UGR<19

Emergency

Class I

Organic Response (control + sensor)

Casambi

DALI-2

DALI-2 sensor

Adapter for installation on rail to be ordered separately

Body finishes

01
White

04
Black

Optical finishes

D8
White transparent

83
Black transparent

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Visit our website
for more information

IN60 EVO

design iGuzzini



Santini Spa headquarters - Bergamo, Italy — Product: iN60 Evo - System MPO | UGR<19 | Black
Ph: Paolo Carlini









SYSTEM SPACE
White transparent | Black transparent
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K | Tunable White
up to 6059lm/m
up to 169lm/W
GL | UGR<19
Up & Down adjustable emission

SYSTEM MMO
Metalized Modular Optic
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K | Tunable White
up to 5696lm/m
up to 154lm/W
UGR<19

SYSTEM MPO
Micro Prismatic Optic
600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 1596lm/m
up to 141lm/W
UGR<19
Angular luminous module

SYSTEM OPAL
600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 4898lm/m
up to 147lm/W
GL
Angular luminous module



SYSTEM WALL WASHER

600 | 1200 mm

LED Module

3000K | 3500K | 4000K

up to 1642lm/m

up to 104lm/W

WW

Other versions available

Downlights and recessed luminaries p. 76 / Linear system p. 180

iN60 Evo System Space

iN60 Evo System MMO

iN60 Evo System MPO

iN60 Evo System Opal

iN60 Evo System Wall Washer

Pendants p. 137



iN60 Evo Stand-alone Space



iN60 Evo Stand-alone MMO

iN60 Evo Stand-alone MPO

iN60 Evo Stand-alone Opal



iN60 Evo System Space



iN60 Evo System MMO

iN60 Evo System MPO

iN60 Evo System Opal



iN60 Evo System Wall Washer

Smart accessories for iN60 Evo

Organic Response lux and motion sensor

Casambi lux and motion sensor

DALI-2 lux and motion sensor



Casambi-DALI control interface



Li-Fi transceiver module

3000K | 3500K | 4000K | Tunable White (2700K ÷ 6500K)

CRI80 | CRI90

IP20

GL | UGR<19 | WW

Class I

Organic Response (control + sensor)

Casambi | Casambi sensor | Casambi HF sensor

DALI-2 | DALI-2 sensor

For track installation, the dedicated accessory PF99 is required

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Finishes

12 Aluminium

01 White

04 Black

Visit our website for more information

MAINS VOLTAGE TRACK

design iGuzzini



Royal Museum for Fine Arts (KMKSA) - Antwerp, Belgium — Product: Mains voltage track - Ceiling/Pendant | White
Ph: Kris Dekeijser



RECESSED

1000 | 2000 | 3000 | 4000 mm



CEILING/PENDANT

1000 | 2000 | 3000 | 4000 mm

Smart accessories for mains voltage track



Casambi
lux/motion
multi-sensor

IP20 | IP40

4 lenghts

Smart Acessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Finishes

12
Aluminium

01
White

04
Black

Visit our website
for more information



FIXTURES FOR LOW VOLTAGE TRACK



82 | SIPARIO LV



86 | PALCO



92 | ROBIN



94 | NEWFO



98 | LE PERROQUET



100 | LASER

102 | LASER BLADE XS



106 | LIBERA



108 | FILORAIL



114 | SUPERRAIL




120 | LOW VOLTAGE TRACK

SIPARIO

design iGuzzini





FOR FILORAIL Ø22

up to 161lm

up to 47lm/W

S | M

Opti Beam Lens



FOR FILORAIL Ø40

up to 650lm

up to 60lm/W

M | F | WF

Opti Beam Lens



FOR FILORAIL Ø56

up to 1180lm

up to 85lm/W

S | M | F | WF | VWF | WW

Opti Beam Lens |



FOR FILORAIL Ø73

up to 2160lm

up to 108lm/W

S | M | F | WF | VWF | WW

Opti Beam Reflector
| Opti Beam Lens




FOR FILORAIL Ø86

up to 2370lm

up to 117lm/W

S | M | F | WF | VWF | WW

Opti Beam Reflector |
Opti Beam Lens



BEAMER FOR FILORAIL Ø22

up to 27lm


beamer



BEAMER FOR FILORAIL Ø40

up to 27lm

beamer



FRAMER FOR FILORAIL Ø22

up to 38lm

framer



FRAMER FOR FILORAIL Ø40

up to 5lm

beamer



FOR LOW VOLTAGE Ø22 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE Ø40 mm

up to 650lm

up to 60lm/W

S | M | WF | O

Opti Beam Lens



FOR LOW VOLTAGE Ø56 mm

up to 1180lm

up to 85lm/W

S | M | F | WF | VWF

Opti Beam Lens

SIPARIO

design iGuzzini



FOR LOW VOLTAGE Ø73 mm

up to 2160lm

up to 108lm/W

S | M | F | WF | VWF

Opti Beam Reflector | Opti Beam Lens



FOR LOW VOLTAGE Ø86 mm

up to 2370lm

up to 117lm/W

S | M | F | WF | VWF

Opti Beam Reflector | Opti Beam Lens



FOR LOW VOLTAGE WALL WASHER

up to 1115lm

up to 73lm/W

WW

Opti Beam Lens



FOR LOW VOLTAGE WALL WASHER Ø73 mm

up to 1200lm

up to 75lm/W

WW

Opti Beam Lens



LOW VOLTAGE WALL WASHER Ø86 mm

up to 1500lm

up to 88lm/W

WW

Opti Beam Lens



FOR LOW VOLTAGE BEAMER Ø22 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE BEAMER Ø40 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE BEAMER Ø86 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE FRAMER Ø22 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE FRAMER Ø40 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE FRAMER Ø40 mm FOR SUPERRAIL

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE Ø22 mm WITH ROD

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



Other versions available

Fixtures for mains voltage track p. 48

Wall and ceiling luminaires p. 202



Sipario



Sipario Framer



Sipario surface



Sipario recessed

FOR LOW VOLTAGE
Ø40 mm WITH ROD

up to 650lm


up to 60lm/W

S | M | WF | O

Opti Beam Lens

ACCESSORIES OPTI BEAM REFRACTOR

1 Optibeam refractors
2 Honeycomb light flap
3 Cylindrical screen
4 Shutter blade
5 Directional flaps

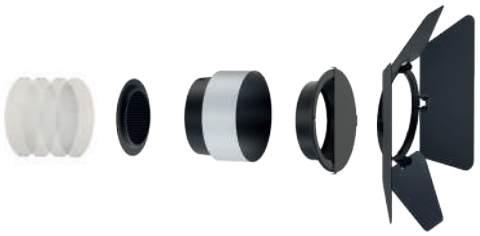

1 2 3 4 5

2700K | 3000K | 3500K | 4000K

CRI90 | CRI97

IP20

5 sizes

Adjustable - Rotation 360° | Tilting 90°

Opti Beam Reflector | Opti Beam Lens| Opti Beam Refractor

Casambi

DALI Broadcast | DALI Powerline

Class III

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01
White

V0
Matte black

Visit our website for more information


Sipario LV: beamer, framer, rod available from April 2026

PALCO

design Artec Studio



Roman Forum Museum - Cartagena, Spain — Product: Palco - Ø37 mm | Black
Ph: Courtesy of Amann-Cánovas-Maruri



LOW VOLTAGE
Ø19 mm FOR FILORAIL

2700K | 3000K | 3500 | 4000K
up to 154lm
up to 45lm/W
S | M
DALI Broadcast



LOW VOLTAGE
Ø37 mm FOR FILORAIL

2700K | 3000K | 3500 | 4000K
up to 578lm
up to 60lm/W
S | M | WF
DALI Broadcast



LOW VOLTAGE
Ø51 mm FOR FILORAIL

2700K | 3000K | 3500 | 4000K
up to 1198lm
up to 75lm/W
S | F | WF
DALI Powerline | Casambi




LOW VOLTAGE
Ø62 mm FOR FILORAIL

2700K | 3000K | 3500 | 4000K
up to 1856lm
up to 94lm/W
S | F | WF
DALI Powerline | Casambi




LOW VOLTAGE
Ø86 mm FOR FILORAIL

2700K | 3000K | 3500 | 4000K
up to 2613lm
up to 102lm/W
S | M | F | WF
DALI Powerline | Casambi




LOW VOLTAGE BEAMER
Ø19 mm FOR FILORAIL

2700K | 3000K | 3500 | 4000K
up to 28lm
Beamer
10°- 65°
DALI Broadcast



LOW VOLTAGE FRAMER
Ø19 mm FOR FILORAIL

2700K | 3000K | 3500 | 4000K
up to 30lm
Framer
DALI Broadcast



LOW VOLTAGE FRAMER
Ø37 mm FOR FILORAIL

2700K | 3000K | 3500 | 4000K
up to 38lm
Framer
12°
DALI Broadcast



LOW VOLTAGE WALL WASHER
Ø51 mm FOR FILORAIL

2700K | 3000K | 3500 | 4000K
up to 296lm
up to 94lm/W
WW
DALI Powerline | Casambi



LOW VOLTAGE WALL WASHER
Ø86 mm FOR FILORAIL


2700K | 3000K | 3500 | 4000K
up to 1373lm
up to 61lm/W
WW
DALI Powerline | Casambi

PALCO

design Artec Studio



The Courtauld Gallery - London, United Kingdom — Product: Palco - Ø51 mm | White
Ph: David Levene, courtesy of Courtauld Gallery



LOW VOLTAGE Ø19 mm

2700K | 3000K | 3500K | 4000K

up to 308lm

up to 60lm/W

S | M

DALI Powerline | Casambi



LOW VOLTAGE Ø37 mm

2700K | 3000K | 3500K | 4000K

up to 578lm

up to 60lm/W

S | M | WF

DALI Powerline | Casambi



LOW VOLTAGE Ø51 mm

2700K | 3000K | 3500K | 4000K

up to 1198lm

up to 74lm/W

S | F | WF

DALI Powerline | Casambi



LOW VOLTAGE Ø62 mm

2700K | 3000K | 3500K | 4000K

up to 1856lm

up to 94lm/W

S | F | WF

DALI Powerline | Casambi



LOW VOLTAGE Ø86 mm

2700K | 3000K | 3500K | 4000K

up to 2613lm

up to 102lm/W

S | M | F | WF

DALI Powerline | Casambi



LOW VOLTAGE Ø51 mm WALL WASHER

2700K | 3000K | 3500K | 4000K

up to 297lm

up to 19lm/W

WW

DALI Powerline | Casambi



LOW VOLTAGE Ø86 mm WALL WASHER

2700K | 3000K | 3500K | 4000K

up to 1373lm

up to 61lm/W

WW

DALI Powerline | Casambi



LOW VOLTAGE Ø19 mm FRAMER

2700K | 3000K | 3500K | 4000K

up to 30lm

Framer

DALI Powerline | Casambi



LOW VOLTAGE Ø37 mm FRAMER

2700K | 3000K | 3500K | 4000K

up to 180lm

Framer

DALI Powerline | Casambi




LOW VOLTAGE Ø19 mm BEAMER

2700K | 3000K | 3500K | 4000K

up to 109lm

Beamer

DALI Powerline | Casambi



LOW VOLTAGE Ø19 mm WITH ROD

2700K | 3000K | 4000K

up to 154lm

up to 45lm/W

M

DALI Powerline | Casambi



LOW VOLTAGE Ø37 mm WITH ROD

2700K | 3000K | 4000K

up to 578lm

up to 60 lm/W

M | WF

DALI Powerline | Casambi

PALCO

design Artec Studio



Fiandre's historic headquarters - Castellarano, Italy — Product: Palco - Ø37 mm | Black
Ph: Fabio Mantovani, courtesy of Fiandre

Other versions available

Fixtures for mains voltage track p. 52

Wall and ceiling luminaires p. 204



Palco Pro



Palco



Palco Wall Washer



Palco Framer



Palco surface



Palco Framer surface



Palco recessed




Palco Framer reccessed

ACCESSORIES

OPTI BEAM REFRACTOR WITH ACCESSORIES

1 Interchangeable reflector (only Ø86 mm)
2 Refractor for medium elliptical distribution
3 Refractor for broad elliptical distribution
4 Soft Lens Filter
5 Honeycomb louvre
6 Cylindrical screen
7 Directional fins.

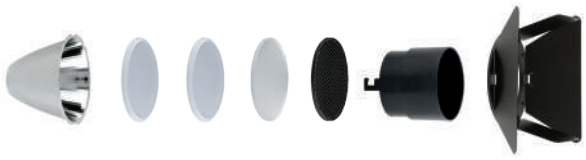

1 2 3 4 5 6 7

OPTI BEAM LENS WITH ACCESSORIES

8 Spill ring
9 Opti Beam Refractor Medium (only Ø86 mm)
10 Opti Beam Refractor Flood (only Ø86 mm)
11 Opti Beam Refractor Wide Flood (only Ø86 mm)
12 Refractor for medium elliptical distribution
13 Refractor for broad elliptical distribution
14 Honeycomb louvre
15 Cylindrical screen



8 9 10 11 12 13 14 15

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90 | CRI97

IP20 | IP40

Class III

Opti Beam Reflector | Opti Beam Lens

Casambi

DALI Broadcast | DALI Powerline

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

04 Black

Other awards
Premio dei premi per l'innovazione 2018
CODEGA 2018
German Design Award 2018
Delta award 2018
Progress Report Selection 2020

Visit our website for more information

ROBIN

design Matteo Thun



University Of Texas Dallas - Arts and Performance Center (UTD APC) Dallas, Texas, USA — Product: Robin - Ø51 mm for Low Voltage track | Black
Ph: Mauricio Rojas



Ø37 mm FOR FILORAIL

up to 652lm
up to 59lm/W
S | M | WF



Ø51 mm FOR FILORAIL

up to 1344lm
up to 74lm/W
S | F | WF



Ø62 mm FOR FILORAIL

up to 2415lm
up to 98lm/W
S | F | WF



Ø51 mm WALL WASHER FOR FILORAIL

up to 328lm
up to 18lm/W
WW



Ø37 mm FOR LOW VOLTAGE TRACK / SUPERRAIL

up to 652lm
up to 59lm/W
S | M | WF



Ø51 mm FOR LOW VOLTAGE TRACK / SUPERRAIL

up to 1344lm
up to 74lm/W
S | F | WF



Ø62 mm FOR LOW VOLTAGE TRACK / SUPERRAIL

up to 2415lm
up to 98lm/W
S | F | WF



Ø51 mm WALL WASHER FOR LOW VOLTAGE TRACK / SUPERRAIL

up to 328lm
up to 18lm/W
WW

ACCESSORIES

1 Refractor for elliptical distribution
2 Honeycomb louvre
3 Spill ring
4 Cylindrical screen
5 Decorative cylindrical screen



1 2 3 4 5

2700K | 3000K | 3500 | 4000K
CRI90
IP20
Class III
Opti Beam Lens
Casambi
DALI Powerline

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

04 Black

reddot winner 2021
best of the best

Visit our website for more information

NEWFO

design iGuzzini



Product: Newfo - Ø88 mm for Filorail | Matte black



LOW VOLTAGE Ø62 mm FOR FILORAIL

up to 896lm
up to 87lm/W
S | M | F | WF
Class III
DALI Broadcast



LOW VOLTAGE Ø88 mm FOR FILORAIL

up to 1818lm
up to 108lm/W
M | F | WF
Class III
DALI Powerline | Casambi



LOW VOLTAGE Ø116 mm FOR FILORAIL

up to 2519lm
up to 114lm/W
M | F | WF
Class III
DALI Powerline | Casambi



LOW VOLTAGE PENDANT Ø88 mm FOR LOW VOLTAGE TRACK AND FILORAIL

up to 1818lm
up to 108lm/W
F | WF
Class III
DALI Powerline | Casambi



LOW VOLTAGE PENDANT Ø116 mm FOR LOW VOLTAGE TRACK, FILO-RAIL AND SUPERRAIL

up to 2519lm
up to 114lm/W
F | WF
Class III
DALI Powerline | Casambi



LOW VOLTAGE Ø62 mm FOR LOW VOLTAGE TRACK AND SUPERRAIL

up to 1145lm
up to 87lm/W
S | M | F | WF
Class III
DALI Powerline | Casambi



LOW VOLTAGE Ø88 mm FOR LOW VOLTAGE TRACK AND SUPERRAIL

up to 1818lm
up to 108lm/W
S | M | F | WF
Class III
DALI Powerline | Casambi



LOW VOLTAGE Ø116 mm FOR LOW VOLTAGE TRACK AND SUPERRAIL

up to 2519lm
up to 114lm/W
S | M | F | WF
Class III
DALI Powerline | Casambi

NEWFO

design iGuzzini



Other versions available

Fixtures for mains voltage track p. 60

Wall luminaires p. 210

Ceiling luminaires



Newfo



Newfo pendant



Newfo surface



Newfo recessed



Newfo surface



Newfo surface pendant



Newfo recessed



Newfo recessed pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP43

3 sizes

Rotation 360° | Tilting 90°

Optibeam Reflector | Optibeam Lens

Class III

Casambi

DALI Broadcast | DALI Powerline

Body finishes

01 White

04 Black

N8 Titanium

Optical finishes

04 Black

N8 Titanium

U7 Brass

V6 Matte copper

reddot winner 2025 best of the best

DESIGN AWARD 2025

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

LE PERROQUET

design Piano Design





Ø55 mm FOR FILORAIL

2700K| 3000K | 3500K | 4000K

up to 496lm

up to 74lm/W

S | M | WF



Ø80 mm FOR FILORAIL

2700K| 3000K | 3500K | 4000K

up to 1436lm

up to 97lm/W

M | F | WF



PENDANT Ø55 mm FOR FILORAIL

2700K| 3000K | 3500K | 4000K

up to 496lm

up to 74lm/W

S | M | WF



PENDANT Ø80 mm FOR FILORAIL

2700K| 3000K | 3500K | 4000K

up to 1436lm

up to 97lm/W

Other versions available

Fixtures for mains voltage track p. 62

Pendants p. 150

Wall luminaires p. 208 / Ceiling luminaires p. 242



Le Perroquet



Le Perroquet pendant



Le Perroquet pendant



Le Perroquet



Le Perroquet pendant

2700K| 3000K | 3500K | 4000K

CRI90

IP20

3 sizes

OptiBeam Lens | OptiBeam Reflector

Class III

Casambi

DALI Powerline

Rotation 360° | Tilting 90°

Smart Accessory for Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes

01 White

06 Yellow

02 Orange

04 Black


05 Red

09 Sky blue

Visit our website
for more information

LASER

design iGuzzini

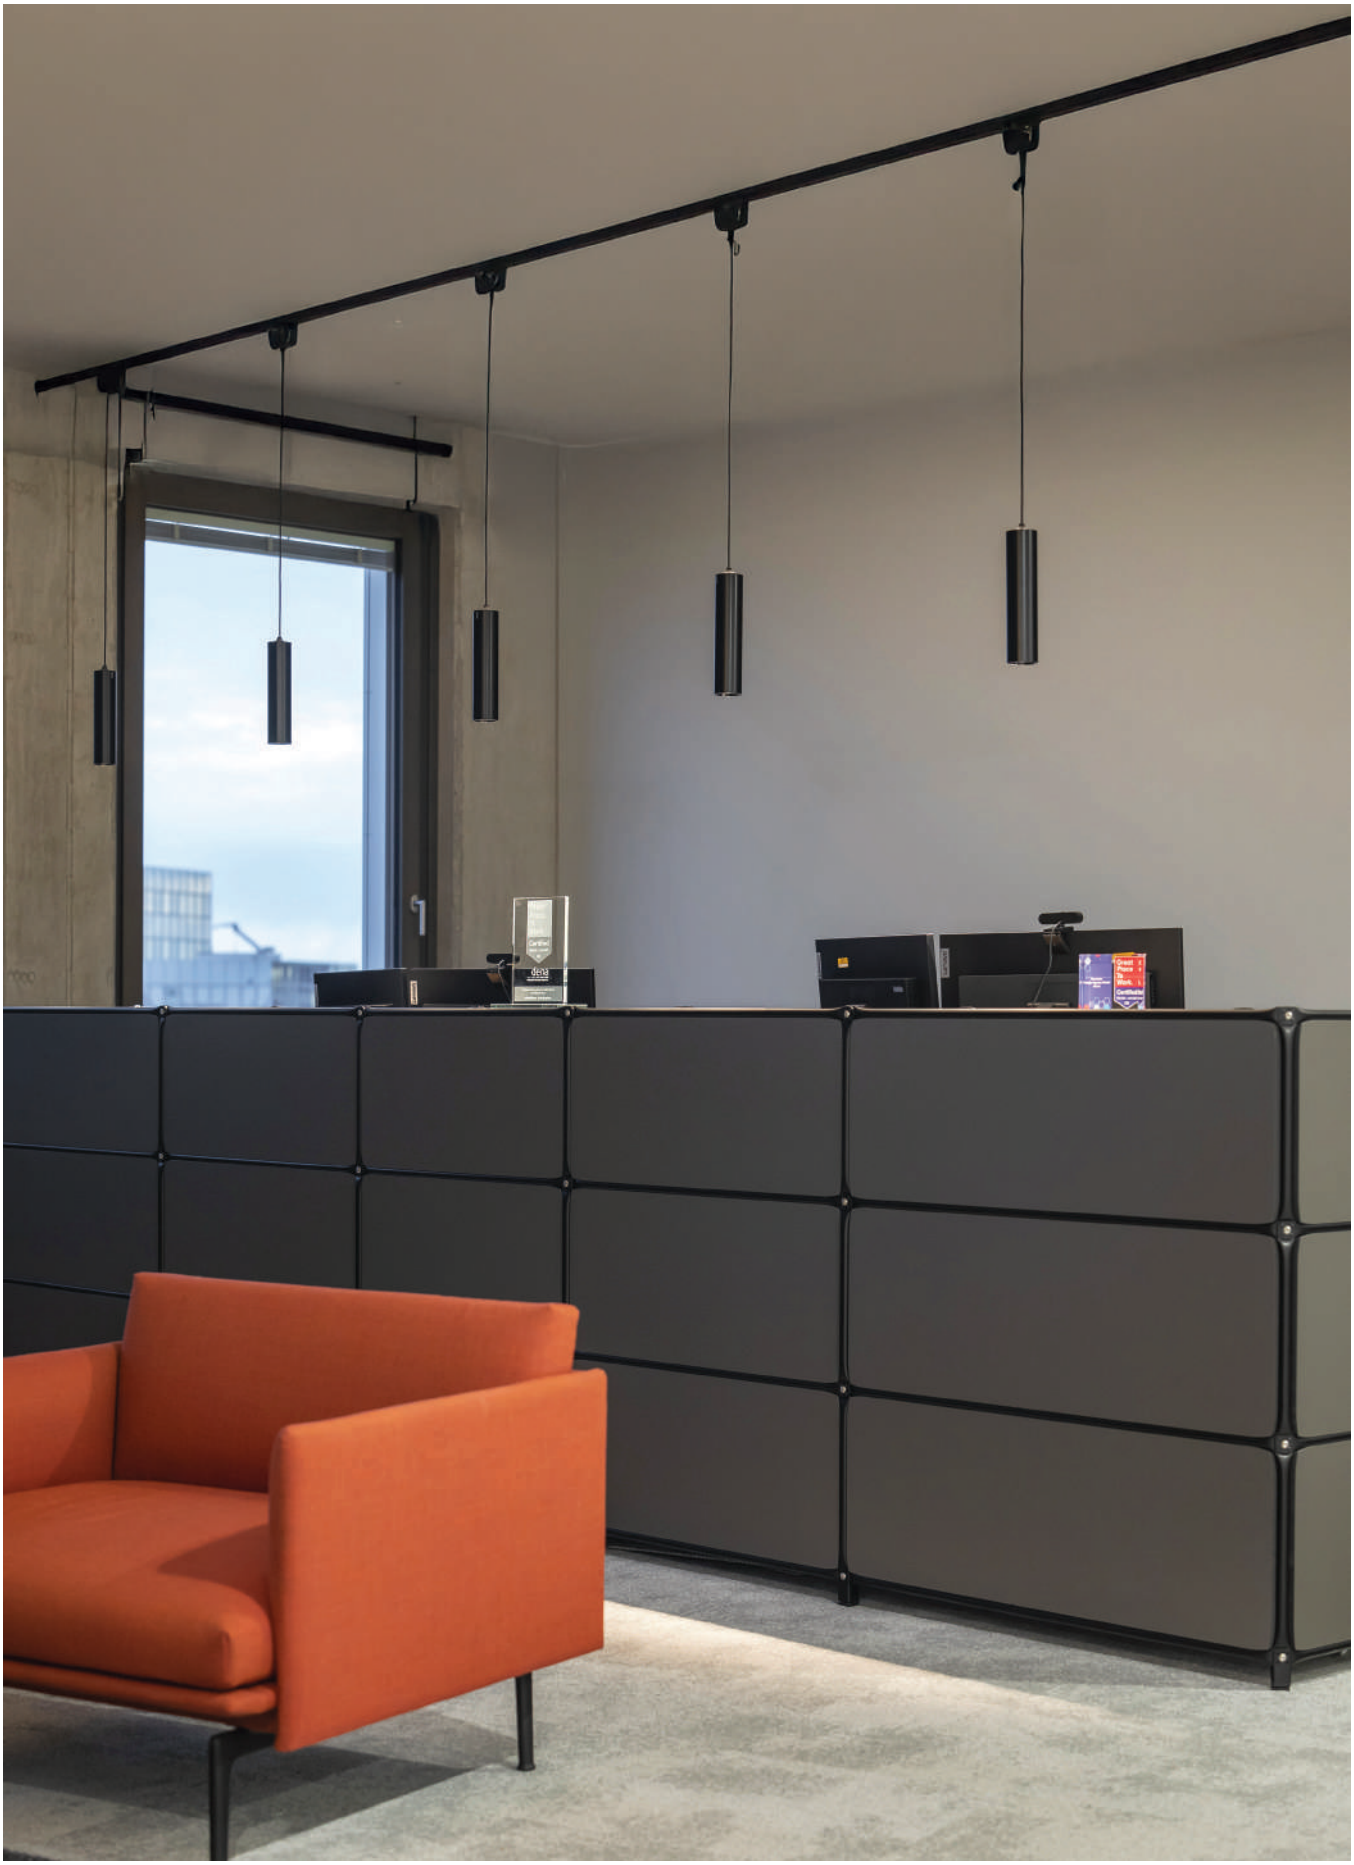

DENA offices. EUREF-Campus - Berlin, Germany — Product: Laser - Pendant Ø59 mm | Black
Ph: Felix Löchner



PENDANT FOR FILORAIL

Ø59 | Ø75
2700K | 3000K | 3500K | 4000K
CRI90
up to 1615lm
up to 107lm/W
M | F



PENDANT FOR LOW VOLTAGE TRACK

Ø59 | Ø75
2700K | 3000K | 4000K
CRI90
up to 1615lm
up to 107lm/W
M | F

Other versions available

Downlights and recessed luminaires p. 28



Laser fixed round



Laser fixed square



Laser adjustable round



Laser Wall Washer round



Laser Wall Washer square

Pendants p. 156

Ceiling luminaires p. 230



Laser pendant



Laser Surface

2700K | 3000K | 3500K | 4000K
CRI90
IP20
2 sizes
Class III
Casambi
DALI Powerline

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Body finishes

01 White
04 Black

Optical finishes


01 White
14 Gold
E8 Gold-satin
E7 Chrome
E6 Burnished chrome
04 Black

Other awards
FX International Interior Design Award 2016

Visit our website for more information

LASER BLADE XS

design iGuzzini

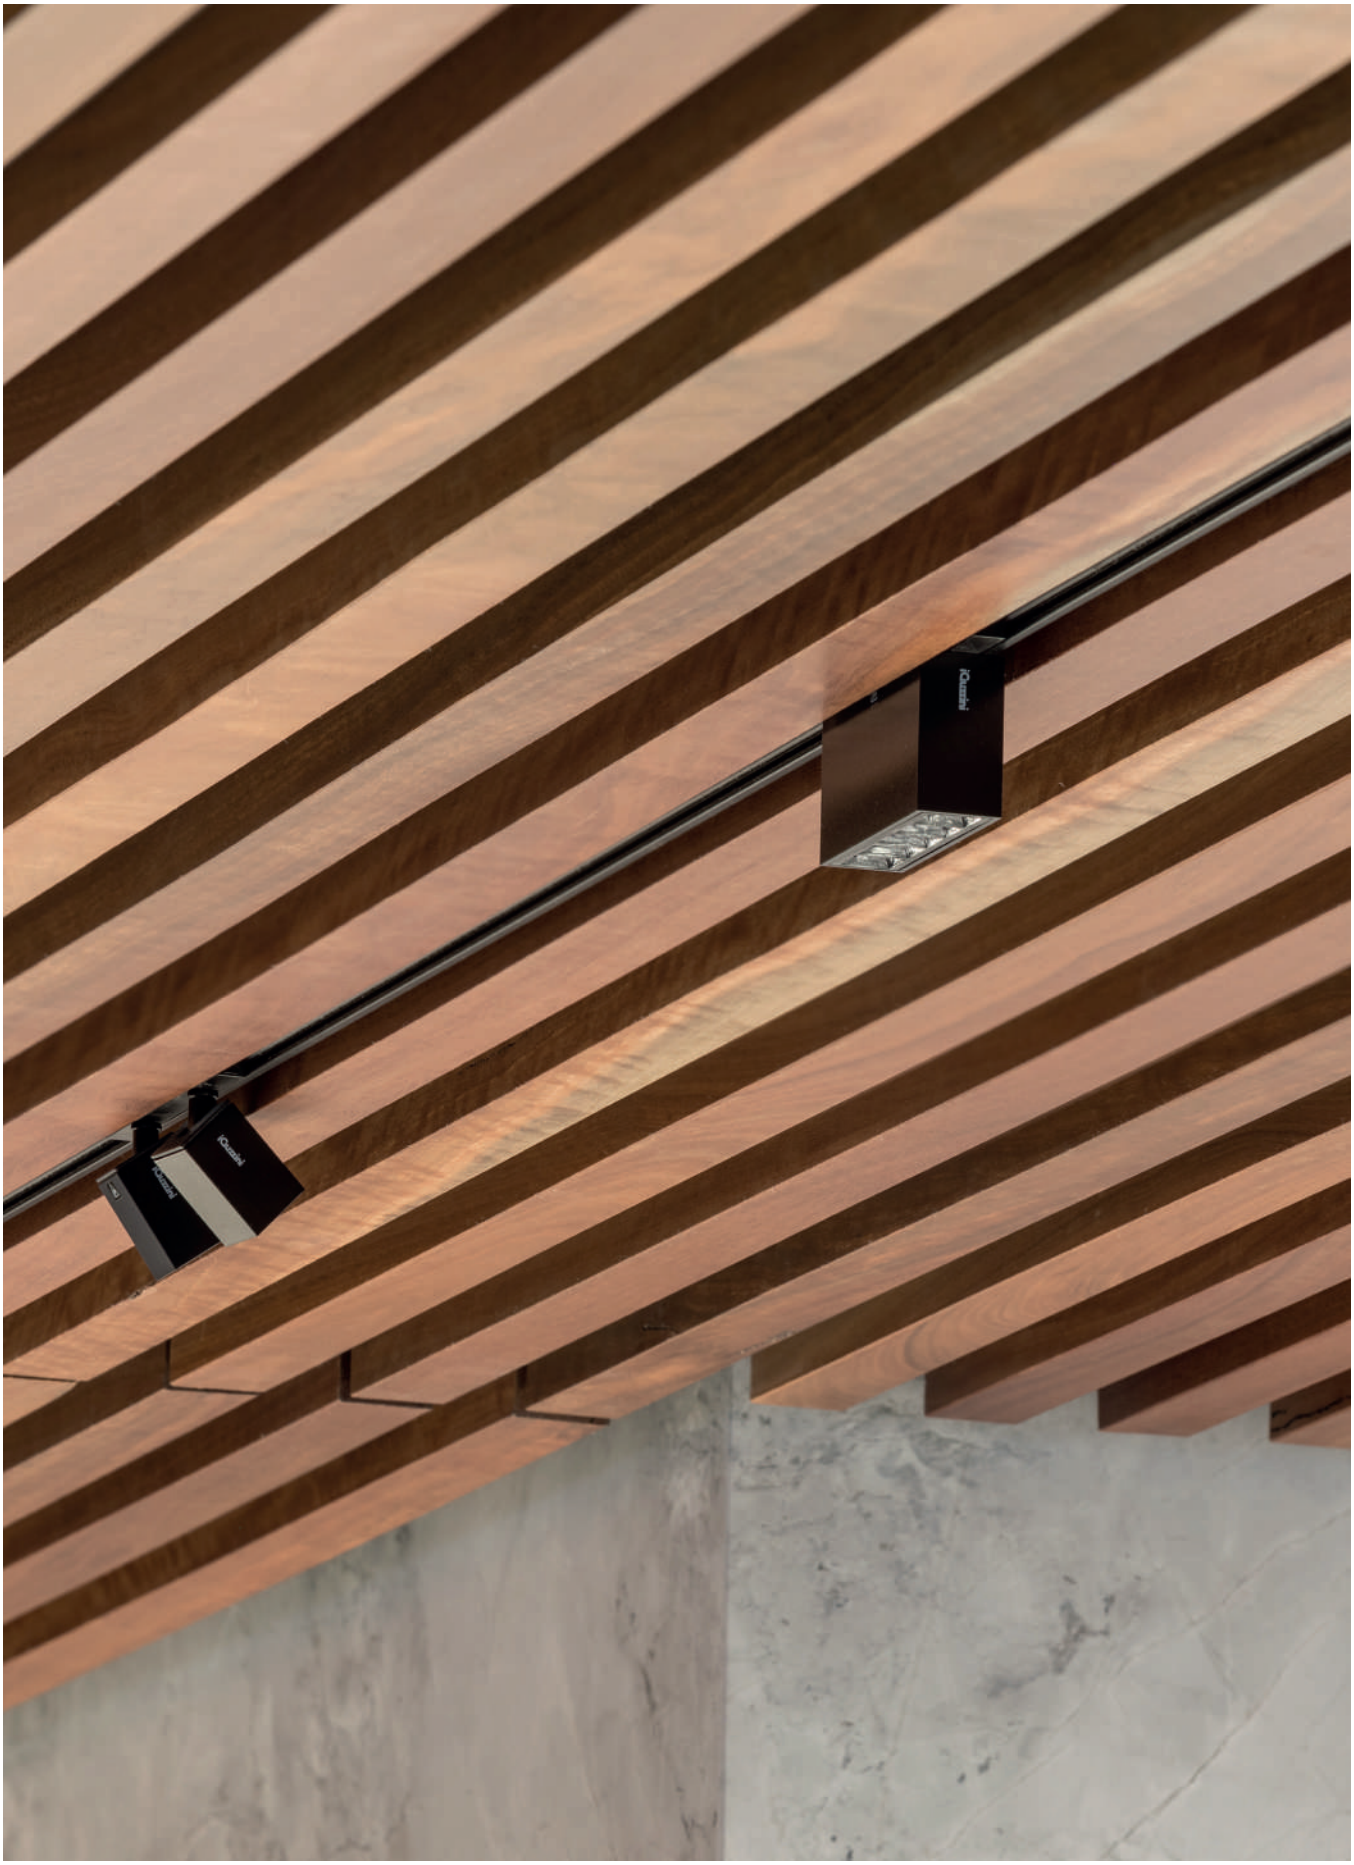

Product: Laser Blade XS - High Contrast | 5 cells | Black/black




HIGH CONTRAST PENDANT FOR FILORAIL

1 | 2×2 | 3×3 cells
2700K | 3000K | 3500K | 4000K
up to 1700lm
up to 98lm/W
F | WF



HIGH CONTRAST FOR FILORAIL

1 | 5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 1839lm
up to 100lm/W
F



WALL WASHER LGC FOR FILORAIL

5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 648lm
up to 35lm/W
WW-LGC



GENERAL LIGHTING PRO FOR FILORAIL

5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 1664lm
up to 90lm/W
GL-PRO



HIGH CONTRAST FOR LOW VOLTAGE TRACK

1 | 5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 2033lm
up to 93lm/W
F



WALL WASHER FOR LOW VOLTAGE TRACK

10 cells
2700K | 3000K | 4000K
up to 836lm
up to 45lm/W
WW



GENERAL LIGHTING PRO FOR LOW VOLTAGE TRACK

5 | 10 cells
2700K | 3000K | 4000K
up to 1690lm
up to 77lm/W
GL-PRO



HIGH CONTRAST PENDANT FOR LOW VOLTAGE TRACK

1 | 2×2 | 3×3 cells
2700K | 3000K | 3500K | 4000K
up to 1535lm
up to 90lm/W
F | WF

HIGH CONTRAST FOR SUPERRAIL

5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 1867lm
up to 85lm/W
F

GENERAL LIGHTING PRO FOR SUPERRAIL

5 | 10 cells
2700K | 3000K | 4000K
up to 1552lm
up to 70lm/W
GL-PRO

WALL WASHER LGC FOR SUPERRAIL

5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 640lm
up to 35lm/W
WW-LGC

LASER BLADE XS

design iGuzzini



Villa Waterfall - Porto Cervo, Italy — Product: Laser Blade XS - High Contrast | 5 cells | Black/black
Ph: Stefano Ferrando, Studio Vetroblu

Other versions available

Downlights and recessed luminaires p. 28



Laser Blade XS High Contrast



Laser Blade XS Wall Washer LGC



Laser Blade XS Wall Washer



Laser Blade XS General lighting Pro



Laser Blade XS High Contrast - adjustable

Pendants p. 158

Ceiling luminaires p. 226



Laser Blade XS High Contrast - pendant

Laser Blade XS High Contrast - ceiling

Laser Blade XS Wall Washer - ceiling

Laser Blade XS General lighting Pro - ceiling

2700K | 3000K | 3500K | 4000K | Tunable White (2700K - 5700K)

CRI80 | CRI90

IP20 | IP43

8 sizes

Fixed | Adjustable

Frame | Minimal

Class II, III

DALI-2 | DALI Broadcast

Power supply to be ordered separately (Class III)

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body finishes

01 White

C1 Traffic white

B1 Signal white

15 Grey

04 Black

V0 Matte black

Optical finishes

01 White

04 Black

14 Gold

E6 Burnished chrome

Other awards
Lighting Design Award 2017
Design L+B 2018
German Design Award 2019

Visit our website for more information

LIBERA

design Artec Studio



Fiandre's historic headquarters - Castellarano, Italy — Product: Libera - 1400 mm | UGR<19 | Black/White transparent
Ph: Fabio Mantovani, courtesy of Fiandre



STAND-ALONE PENDANT FOR FILORAIL

1200 |1400 | 1800 mm

2700K | 3000K | 3500K | 4000K

up to 3527lm

up to 126lm/W

GL | UGR<19

Other versions available

Pendants p. 128



Libera System - pendant

Libera stand-alone pendant

Wall luminaires p. 198



Libera System - wall



Libera stand-alone wall mounted

Table and floor lamps p. 266



Libera System - ceiling to floor



Libera stand-alone floor



Libera stand-alone ceiling to floor

Smart accessories for Libera



Organic Response



Quick BLE (Casambi)



DALI-2

Linear system p. 182



Libera System - pendant



Libera System - Space lighting modules



Libera System - General Lighting modules



Libera System - general lighting modules without screen

Libera System - Led strip for Up light



Libera System - mounting and power supply accessories

2700K | 3000K | 3500K | 4000K

CRI90

6 lenghts

General Lighting | UGR<19

Space | Microtextured | Smoked

Up & Down | Down emission

Organic response (control + sensor)

Casambi | Casambi Sensor

DALI Broadcast | DALI Powerline | DALI-2 Sensor

IP20 | IP40

Class III

Smart Accessory for Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body finishes

01 White

04 Black

N8 Titanium

N9 Sapphire

Optical finishes

R4 White transparent

83 Black Transparent

Other awards

BrightStar Award 2024

Grand Prix du Design (Gold and Platinum) 2024

Production Innovation Award 2024

Good Design 2024

Visit our website for more information

FILORAIL

design iGuzzini





FILORAIL CEILING/PENDANT

DALI Broadcast | DALI Powerline | Casambi



FILORAIL RECESSED MINIMAL

DALI Broadcast | DALI Powerline | Casambi



FILORAIL RECESSED FRAME

DALI Broadcast | DALI Powerline | Casambi

TOOLS

DALI Broadcast




PALCO LOW VOLTAGE
Ø19 / 37 mm
FOR FILORAIL DALI BROADCAST

up to 578lm

up to 60lm/W

S | M | WF



PALCO LOW VOLTAGE BEAMER
Ø19 mm
FOR FILORAIL DALI BROADCAST

up to 28lm

Beamer

10°-65°



PALCO LOW VOLTAGE FRAMER
Ø19 / 37 mm
FOR FILORAIL DALI BROADCAST

up to 38lm

Framer

12°



SIPARIO LOW VOLTAGE
Ø22 / 40 mm
FOR FILORAIL DALI BROADCAST

up to 650lm

up to 60lm/W

M | F | WF

Opti Beam Lens



SIPARIO BEAMER LOW VOLTAGE
Ø22 / 40 mm
FOR FILORAIL DALI BROADCAST

up to 27lm

beamer



SIPARIO FRAMER LOW VOLTAGE
Ø22 / 40 mm
FOR FILORAIL DALI BROADCAST

up to 5lm

beamer




NEWFO Ø62 mm
FOR FILORAIL DALI BROADCAST

up to 896lm

up to 87lm/W

S | M | F | WF



LASER BLADE XS HIGH CONTRAST
1 CELL FOR FILORAIL DALI
BROADCAST

up to 201lm

up to 60lm/W

F

LASER BLADE XS HIGH CONTRAST
PENDANT 1 CEL
FOR FILORAIL DALI BROADCAST

up to 201lm

up to 61lm/W

F



LIBERA STAND-ALONE PENDANT
FOR FILORAIL DALI BROADCAST

up to 3527lm

up to 126lm/W

GL | UGR<19

FILORAIL

design iGuzzini

DALI Powerline



PALCO LOW VOLTAGE Ø51 / 62 / 86 mm FOR FILORAIL DALI POWERLINE

up to 2613lm

up to 102lm/W

S | M | F | WF



PALCO LOW VOLTAGE WALL WASHER Ø51 / 86 mm FOR FILORAIL DALI POWERLINE

up to 1373lm

up to 61lm/W

WW



SIPARIO LOW VOLTAGE Ø56 / 73 / 86 mm FOR FILORAIL DALI BROADCAST

up to 650lm

up to 60lm/W

M | F | WF

Opti Beam Lens



ROBIN Ø37 / 51 / 62 mm FOR FILORAIL DALI POWERLINE

up to 2415lm

up to 98lm/W

S | M | F | WF



ROBIN WALL WASHER Ø51 mm FOR FILORAIL DALI POWERLINE

up to 328lm

up to 18lm/W

WW



NEWFO Ø88 / 116 mm FOR FILORAIL DALI POWERLINE

up to 2519lm

up to 114lm/W

M | F | WF



NEWFO PENDANT Ø88 / 116 mm FOR FILORAIL DALI POWERLINE

up to 2519lm

up to 114lm/W

F | WF



LE PERROQUET Ø55 / 80 mm FOR FILORAIL DALI POWERLINE

up to 1436lm

up to 97lm/W

S | M | F | WF



LE PERROQUET Ø55 / 80 mm FOR FILORAIL DALI POWERLINE

up to 1436lm

up to 97lm/W

S | M | F | WF



LIBERA STAND-ALONE PENDANT FOR FILORAIL DALI POWERLINE

up to 4017lm

up to 150lm/W

M | F



LASER BLADE XS HIGH CONTRAST 5 - 10 CELLS FOR FILORAIL DALI POWERLINE

up to 1839lm

up to 100lm/W

F



LASER BLADE XS GENERAL LIGHTING PRO 5 - 10 CELLS FOR FILORAIL DALI POWERLINE


up to 1664lm

up to 90lm/W

GL-PRO



DALI Powerline



LASER BLADE XS WALL WASHER LGC 5 - 10 CELLS FOR FILORAIL DALI POWERLINE

up to 648lm

up to 35lm/W

WW-LGC

LASER BLADE XS HIGH CONTRAST PENDANT 1 - 4 - 9 CELLS FOR FILORAIL DALI POWERLINE

up to 1700lm

up to 98lm/W

M | F



LASER PENDANT Ø59 / 75 mm FOR FILORAIL DALI POWERLINE

up to 1615lm

up to 107lm/W

M | F



LASER EVO PENDANTØ59 / 75 mm FOR FILORAIL DALI POWERLINE

up to 1680lm

up to 110lm/W

M | F

FILORAIL

design iGuzzini

Casambi



PALCO LOW VOLTAGE Ø51 / 62 / 86 mm FOR FILORAIL CASAMBI

up to 2613lm

up to 102lm/W

S | M | F | WF



PALCO LOW VOLTAGE WALL WASHER Ø51 / 86 mm FOR FILORAIL CASAMBI

up to 1373lm

up to 61lm/W

WW



SIPARIO LOW VOLTAGE Ø56 / 73 / 86 mm FOR FILORAIL CASAMBI

up to 650lm

up to 60lm/W

M | F | WF

Opti Beam Lens



ROBIN Ø37 / 51 / 62 mm FOR FILORAIL CASAMBI

up to 2415lm

up to 98lm/W

S | M | F | WF



ROBIN WALL WASHER Ø51 mm FOR FILORAIL CASAMBI

up to 328lm

up to 18lm/W

WW



NEWFO Ø88 / 116 mm FOR FILORAIL CASAMBI

up to 2519lm

up to 114lm/W

M | F | WF



NEWFO PENDANT Ø88 / 116 mm FOR FILORAIL CASAMBI

up to 2519lm

up to 114lm/W

F | WF



LE PERROQUET Ø55 / 80 mm FOR FILORAIL CASAMBI

up to 1436lm

up to 97lm/W

S | M | F | WF



LE PERROQUET Ø55 / 80 mm FOR FILORAIL CASAMBI

up to 1436lm

up to 97lm/W

S | M | F | WF



LIBERA STAND-ALONE PENDANT FOR FILORAIL CASAMBI

up to 4017lm

up to 150lm/W

M | F



LASER BLADE XS HIGH CONTRAST 5 - 10 CELLS FOR FILORAIL CASAMBI

up to 1839lm

up to 100lm/W

F



LASER BLADE XS GENERAL LIGHTING PRO 5 - 10 CELLS FOR FILORAIL CASAMBI

up to 1664lm

up to 90lm/W

GL-PRO

Casambi



LASER BLADE XS WALL WASHER LGC 5 - 10 CELLS FOR FILORAIL CASAMBI

up to 648lm

up to 35lm/W

WW-LGC

LASER BLADE XS HIGH CONTRAST PENDANT 1 - 4 - 9 CELLS FOR FILORAIL CASAMBI

up to 1700lm

up to 98lm/W

M | F



LASER PENDANTØ59 / 75 mm FOR FILORAIL CASAMBI

up to 1615lm

up to 107lm/W

M | F



LASER EVO PENDANTØ59 / 75 mm FOR FILORAIL CASAMBI

up to 1680lm

up to 110lm/W

M | F

Smart accessories for Filorail



Casambi
lux/motion multi-sensor

2700K | 3000K | 3500K | 4000K

Casambi

DALI Powerline | DALI Broadcast

Finishes

01
White

04
Black

reddot winner 2025
best of the best

DESIGN AWARD 2025

Other awards
Light Middle East Award: Indoor Lighting
Product of the Year 2025
Grand Prix du Design 2025

Visit our website
for more information

Sipario for Filorail
available from
April 2026

SUPERRAIL

design iGuzzini



Venice Venice Hotel - Venice, Italy — Product: Superrail - Pendant | Palco low Voltage | Black
Ph: Alessandra Chemollo



CEILING/PENDANT

DALI Powerline | Casambi



PENDANT UP/DOWN

DALI Powerline | Casambi



RECESSED FRAME

DALI Powerline | Casambi



RECESSED MINIMAL

DALI Powerline | Casambi



PALCO LOW VOLTAGE
Ø19 / 37 / 51 / 62 / 86 mm
FOR SUPERRAIL DALI POWERLINE

up to 2496lm
up to 94lm/W
S | M | F | WF



PALCO LOW VOLTAGE
WALL WASHER Ø51 / 86 mm
FOR SUPERRAIL DALI POWERLINE

up to 1373lm
up to 51lm/W
WW



PALCO LOW VOLTAGE FRAMER
Ø19 / 37 mm
FOR SUPERRAIL DALI POWERLINE

up to 38lm
Framer
12°



PALCO LOW VOLTAGE BEAMER
Ø19 mm
FOR SUPERRAIL DALI POWERLINE

up to 28lm
Beamer
10°-65°



SIPARIO LOW VOLTAGE
Ø22 / 40/ 56 / 73 /86 mm
FOR SUPERRAIL DALI POWERLINE

up to 2376lm
up to 117lm/W
M | F | WF
Opti Beam Lens



SIPARIO FRAMER LOW VOLTAGE
Ø22 /40 mm
FOR SUPERRAIL DALI POWERLINE

up to 40lm
beamer



SIPARIO BEAMER LOW VOLTAGE
Ø22 /40 / 86 mm
FOR SUPERRAIL DALI POWERLINE

up to 1456lm
up to 80lm/W
beamer



ROBIN Ø37 / 51 / 62 mm
FOR SUPERRAIL DALI POWERLINE

up to 2407lm
up to 94lm/W
S | M | F | WF



ROBIN WALL WASHER Ø51 mm
FOR SUPERRAIL DALI POWERLINE

up to 322lm
up to 18lm/W
WW



ROBIN UP-LIGHT
Ø37 / 51 / 62 mm
FOR SUPPRAIL DALI POWERLINE

up to 2407lm
up to 94lm/W
S | M | F | WF



ROBIN WALL WASHER UP-LIGHT
Ø51 mm
FOR SUPPRAIL DALI POWERLINE

up to 322lm
up to 18lm/W
WW



NEWFO Ø62 / Ø88 / 116 mm
FOR SUPERRAIL DALI POWERLINE

up to 2520lm
up to 113lm/W
S | M | F | WF
Class III

SUPERRAIL

design iGuzzini

TOOLS

DALI Powerline



NEWFO PENDANT Ø88 / 116 mm FOR SUPERRAIL DALI POWERLINE

up to 2520lm

up to 113lm/W

F | WF

Class III

DALI Powerline | Casambi



LASER BLADE XS HIGH CONTRAST 1 - 2 CELLS FOR SUPERRAIL DALI POWERLINE

up to 160lm

up to 64lm/W

F

LASER BLADE XS HIGH CONTRAST 5 - 10 CELLS FOR SUPERRAIL DALI POWERLINE

up to 1887lm

up to 95lm/W

F

LASER BLADE XS GENERAL LIGHTING PRO 5 - 10 CELLS FOR SUPERRAIL DALI POWERLINE

up to 1552lm

up to 70lm/W

GL-PRO

LASER BLADE XS WALL WASHER 5 - 10 CELLS FOR SUPERRAIL DALI POWERLINE

up to 640lm

up to 34lm/W

WW



LASER BLADE HIGH XS CONTRAST PENDANT 1 - 4 - 9 CELLS FOR FOR SUPERRAIL DALI POWERLINE

up to 1150lm

up to 67lm/W

F | WF

SUPERRAIL SPACE FOR SUPERRAIL DALI POWERLINE

up to 3646lm

up to 144lm/W

GL | UGR<19

LED STICK FOR SUPPRAIL DALI POWERLINE

up to 1848lm

up to 74lm/W

GL

UP-LIGHT LED STRIP FOR SUPPRAIL DALI POWERLINE

up to 1978lm

up to 136lm/W

GL



LASER PENDANT Ø59 / 75 mm FOR SUPERRAIL DALI POWERLINE

up to 1615lm

up to 106lm/W

M | F



LASER EVO PENDANT Ø59 / 75 mm FOR SUPERRAIL DALI POWERLINE

up to 1615lm

up to 106lm/W

M | F

TOOLS

Casambi



PALCO LOW VOLTAGE
Ø19 / 37 / 51 / 62 / 86 mm
FOR SUPERRAIL CASAMBI

up to 2496lm

up to 94lm/W

S | M | F | WF



PALCO LOW VOLTAGE
WALL WASHER Ø51 / 86 mm
FOR SUPERRAIL CASAMBI

up to 1373lm

up to 51lm/W

WW



PALCO LOW VOLTAGE FRAMER
Ø19 / 37 mm
FOR SUPERRAIL CASAMBI

up to 38lm

Framer

12°



PALCO LOW VOLTAGE BEAMER
Ø19 mm
FOR SUPERRAIL CASAMBI

up to 28lm

Beamer

10°-65°



SIPARIO LOW VOLTAGE
Ø22 / 40 / 56 / 73 / 86 mm
FOR SUPERRAIL CASAMBI

up to 2376lm

up to 117lm/W

M | F | WF

Opti Beam Lens



SIPARIO FRAMER LOW VOLTAGE
Ø22 / 40 mm
FOR SUPERRAIL CASAMBI

up to 40lm

beamer



SIPARIO BEAMER LOW VOLTAGE
Ø22 / 40 / 86 mm
FOR SUPERRAIL CASAMBI

up to 1456lm

up to 80lm/W

beamer



ROBIN Ø37 / 51 / 62 mm
FOR SUPERRAIL CASAMBI

up to 2407lm

up to 94lm/W

S | M | F | WF



ROBIN WALL WASHER Ø51 mm
FOR SUPERRAIL CASAMBI

up to 322lm

up to 18lm/W

WW



ROBIN UP-LIGHT
Ø37 / 51 / 62 mm
FOR SUPPRAIL CASAMBI

up to 2407lm

up to 94lm/W

S | M | F | WF



ROBIN WALL WASHER UP-LIGHT
Ø51 mm
FOR SUPPRAIL CASAMBI

up to 322lm

up to 18lm/W

WW



NEWFO Ø62 / Ø88 / 116 mm
FOR SUPERRAIL CASAMBI

up to 2520lm

up to 113lm/W

S | M | F | WF

Class III

SUPERRAIL

design iGuzzini

TOOLS

Casambi



NEWFO PENDANT Ø88 / 116 mm FOR SUPERRAIL CASAMBI

up to 2520lm

up to 113lm/W

F | WF

Class III



LASER BLADE XS HIGH CONTRAST 1 - 2 CELLS FOR SUPERRAIL CASAMBI

up to 160lm

up to 64lm/W

F

LASER BLADE XS HIGH CONTRAST 5 - 10 CELLS FOR SUPERRAIL CASAMBI

up to 1887lm

up to 95lm/W

F

LASER BLADE XS GENERAL LIGHTING PRO 5 - 10 CELLS FOR SUPERRAIL CASAMBI

up to 1552lm

up to 70lm/W

GL-PRO

LASER BLADE XS WALL WASHER 5 - 10 CELLS FOR SUPERRAIL CASAMBI

up to 640lm

up to 34lm/W

WW



LASER BLADE HIGH XS CONTRAST PENDANT 1 - 4 - 9 CELLS FOR FOR SUPERRAIL CASAMBI

up to 1150lm

up to 67lm/W

F | WF

SUPERRAIL SPACE FOR SUPERRAIL CASAMBI

up to 3646lm

up to 144lm/W

GL | UGR<19

LED STICK FOR SUPPRAIL CASAMBI

up to 1848lm

up to 74lm/W

GL

UP-LIGHT LED STRIP FOR SUPPRAIL CASAMBI

up to 1978lm

up to 136lm/W

GL



LASER PENDANT Ø59 / 75 mm FOR SUPERRAIL CASAMBI

up to 1615lm

up to 106lm/W

M | F



LASER EVO PENDANT Ø59 / 75 mm FOR SUPERRAIL CASAMBI

up to 1615lm

up to 106lm/W

M | F

Smart accessories for Superrail



Casambi lux/motion multi-sensor



Luminaire adapter



Pink Villa Design Studio - Stockholm, Sweden — Product: Superrail - Palco Low Voltage | Ø37 mm | Black
Ph: Max Rommel, courtesy of Nichetto Studio

2700K | 3000K | 3500K | 4000K

Casambi

DALI Powerline | DALI Broadcast

Finishes

01
White

04
Black

Visit our website
for more information

LOW VOLTAGE TRACK

design iGuzzini




Wilmotte & Associes Architects offices - Milan, Italy — Product: Low voltage track - Palco Low Voltage | Ø37 mm | Black
Ph: Stefano Anzini



LOW VOLTAGE TRACK CEILING/PENDANT

DALI Powerline | Casambi



LOW VOLTAGE TRACK RECESSED

DALI Powerline | Casambi

TOOLS

Dali Powerline



PALCO LOW VOLTAGE Ø19 / 37 / 51 / 62 / 86 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 2496lm

up to 94lm/W

S | M | F | WF



PALCO LOW VOLTAGE WALL WASHER Ø51 / 86 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 1373lm

up to 51lm/W

WW



PALCO LOW VOLTAGE FRAMER Ø19 / 37 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 38lm

Framer

12°



PALCO LOW VOLTAGE BEAMER Ø19 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 28lm

Beamer

10°-65°



PALCO LOW VOLTAGE Ø19 / 37 mm WITH ROD FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 578lm

up to 60lm/W

M | WF



SIPARIO LOW VOLTAGE Ø22 / 40/ 56 / 73 / 86 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 2376lm

up to 117lm/W

M | F | WF

Opti Beam Lens



SIPARIO FRAMER LOW VOLTAGE Ø22 / 40 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 40lm

beamer



SIPARIO BEAMER LOW VOLTAGE Ø22 / 40 / 86 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 1456lm

up to 80lm/W

beamer



SIPARIO LOW VOLTAGE Ø22 / 40 mm WITH ROD FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 650lm

up to 60lm/W

S | M | WF | O

Opti Beam Lens



ROBIN Ø37 / 51 / 62 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 2407lm

up to 94lm/W

S | M | F | WF



ROBIN WALL WASHER Ø51 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 322lm

up to 18lm/W

WW



NEWFO Ø62 / Ø88 / 116 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 2520lm

up to 113lm/W

S | M | F | WF

Class III

LOW VOLTAGE TRACK

design iGuzzini

TOOLS

Dali Powerline



NEWFO PENDANT Ø88 / 116 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 2520lm

up to 113lm/W

F | WF

Class III



LASER BLADE HIGH CONTRAST 1 - 2 CELLS FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 160lm

up to 64lm/W

F



LASER BLADE HIGH CONTRAST 5 - 10 CELLS FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 2033lm

up to 93lm/W

F



GENERAL LIGHTING PRO 5X/10X FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 1690lm

up to 77lm/W

GL-PRO



LASER BLADE WALL WASHER 10 CELL FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 836lm

up to 45lm/W

WW



LASER BLADE HIGH CONTRAST PENDANT 1 - 4 - 9 CELLS FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 1150lm

up to 67lm/W

F | WF



LASER PENDANT Ø59 / 75 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 1615lm

up to 106lm/W

M | F



LASER EVO PENDANT Ø59 / 75 mm FOR LOW VOLTAGE TRACK DALI POWERLINE

up to 1615lm

up to 106lm/W

M | F

Smart accessories for low voltage track



Casambi lux/motion multi-sensor

TOOLS

Casambi



PALCO LOW VOLTAGE Ø19 / 37 / 51 / 62 / 86 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 2496lm

up to 94lm/W

S | M | F | WF



PALCO LOW VOLTAGE WALL WASHER Ø51 / 86 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 1373lm

up to 51lm/W

WW



PALCO LOW VOLTAGE FRAMER Ø19 / 37 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 38lm

Framer

12°



PALCO LOW VOLTAGE BEAMER Ø19 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 28lm

Beamer

10°-65°



PALCO LOW VOLTAGE Ø19 / 37 mm WITH ROD FOR LOW VOLTAGE TRACK CASAMBI

up to 578lm

up to 60lm/W

M | WF



SIPARIO LOW VOLTAGE Ø22 / 40 / 56 / 73 / 86 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 2376lm

up to 117lm/W

M | F | WF

Opti Beam Lens



SIPARIO FRAMER LOW VOLTAGE Ø22 / 40 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 40lm

beamer



SIPARIO BEAMER LOW VOLTAGE Ø22 / 40 / 86 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 1456lm

up to 80lm/W

beamer



SIPARIO LOW VOLTAGE Ø22 / 40 mm WITH ROD FOR LOW VOLTAGE TRACK CASAMBI

up to 650lm

up to 60lm/W

S | M | WF | O

Opti Beam Lens



ROBIN Ø37 / 51 / 62 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 2407lm

up to 94lm/W

S | M | F | WF



ROBIN WALL WASHER Ø51 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 322lm

up to 18lm/W

WW



NEWFO Ø62 / 88 / 116 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 2520lm

up to 113lm/W

S | M | F | WF

Class III

LOW VOLTAGE TRACK

TOOLS

Casambi



NEWFO PENDANT Ø88 / 116 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 2520lm

up to 113lm/W

F | WF

Class III



LASER BLADE HIGH CONTRAST 1 - 2 CELLS FOR LOW VOLTAGE TRACK CASAMBI

up to 160lm

up to 64lm/W

F



LASER BLADE HIGH CONTRAST 5 - 10 CELLS FOR LOW VOLTAGE TRACK CASAMBI

up to 2033lm

up to 93lm/W

F



GENERAL LIGHTING PRO 5X/10X FOR LOW VOLTAGE TRACK CASAMBI

up to 1690lm

up to 77lm/W

GL-PRO



LASER BLADE WALL WASHER 10 CELL FOR LOW VOLTAGE TRACK CASAMBI

up to 836lm

up to 45lm/W

WW



LASER BLADE HIGH CONTRAST PENDANT 1 - 4 - 9 CELLS FOR LOW VOLTAGE TRACK CASAMBI

up to 1150lm

up to 67lm/W

F | WF



LASER PENDANT Ø59 / 75 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 1615lm

up to 106lm/W

M | F



LASER EVO PENDANT Ø59 / 75 mm FOR LOW VOLTAGE TRACK CASAMBI

up to 1615lm

up to 106lm/W

M | F

Smart accessories for low voltage track



Casambi lux/motion multi-sensor



Chalet Clivia – Ollon, Switzerland — Product: Low voltage track | Robin Ø37 | Black
Ph: Paolo Carlini

2700K | 3000K | 3500K | 4000K

Casambi

DALI Powerline | DALI Broadcast

Finishes

01
White

04
Black

Visit our website
for more information



PENDANTS


128 | LIBERA


130 | LIGHT SHED 14


132 | LIGHT SHED 60


134 | IN30 EVO


135 | IN45


137 | IN60 EVO


140 | IN30



142 | ISIGN


144 | LINEALUCE 27


146 | BETWO


148 | EASY


150 | LE PERROQUET


152 | NEWFO


154 | TECNICA EVO


155 | TACK


156 | LASER

158 | LASER BLADE XS


160 | ISOLA


162 | IPLAN


164 | IPLAN ACCESS

165 | IPLAN NEXT


166 | DROP BY DROP


168 | CLAN


169 | ZURIGO

LIBERA

design Artec Studio



Private office - Bologna, Italy — Product: Libera - 2700 mm | UGR<19 | Black/WhiteTransparent
Ph: Michele Nastasi



SYSTEM - PENDANT

600 | 900 | 1200 | 1800 | 2300 | 2700 mm

up to 5287lm

up to 128lm/W

GL | UGR<19



STAND-ALONE PENDANT

1400 | 1800 mm

with sensor 1900 mm

up to 5222lm

up to 135lm/W

GL | UGR<19



STAND-ALONE PENDANT FOR FILORAIL

1200 | 1400 | 1800 mm

up to 4017lm

up to 145lm/W

GL | UGR<19

Other versions available

Wall luminaires p. 198



Libera System - wall



Libera stand-alone wall mounted

Table and floor lamps p. 266



Libera System - ceiling to floor



Libera stand-alone floor



Libera stand-alone ceiling to floor

Fixtures for low voltage track p. 106

Libera stand-alone pendant for Filorail

Linear systems p. 182



Libera System - pendant



Libera System - Space lighting modules



Libera System - General Li-ghting modules



Libera System - General Li-ghting modules without screen

Libera System - Led strip for Up light



Libera System - mounting and power supply accessories

Smart accessories for Libera



Organic Response



Quick BLE (Casambi)



DALI-2

2700K | 3000K | 3500K | 4000K
CRI90
6 lenghts
General Lighting | UGR<19
Space | Microtextured | Smoked
Up & Down | Down emission
Organic Response (control + sensor)
Casambi | Casambi Sensor
DALI-2 | DALI-2 Sensor
IP20
Class I

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Body finishes



01 White



04 Black



N8 Titanium



N9 Sapphire

Optical finishes



R4 White Transparent



83 Black Transparent



B9 Smoked



P2 Microtextured

Other awards
BrightStar Award 2024
Grand Prix du Design (Gold and Platinum) 2024
Production Innovation Award 2024
Good Design 2024

Visit our website for more information

LIGHT SHED 14

design iGuzzini



Park Associati Studio - Milan, Italy — Product: Light shed 14 - 1195×140×48 mm | UGR<19 | White/Transparent white
Ph: Paolo Carlini



PENDANT

1200 | 1600 | 2400 | 3200 mm

up to 14760lm

up to 161lm/W

UGR<19

Opti Diamond

Other versions available

Fixtures for main voltage track p. 74

Ceiling luminaires p. 247



Light Shed 14
Fixture for mains voltage track

Light Shed 14
ceiling mounted

Smart accessories for Light Shed 14



Organic Response



Quick BLE (Casambi)



DALI-2

3000K | 4000K

CRI80 | CRI90

IP20

4 lenghts

Opti Diamond - UGR<19

Emergency

Class I

Up & Down | Down emission

Organic Response (control + sensor)

Casambi

DALI-2 | DALI-2 sensor

Body finishes

01
White

04
Black

Optical finishes

R4
White Transparent

83
Black Transparent

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification


Visit our website
for more information

LIGHT SHED 60

design iGuzzini



Lighthinking Space HQ iGuzzini illuminazione - Recanati, Italy — Product: Light Shed 60
Ph: Studio Buschi

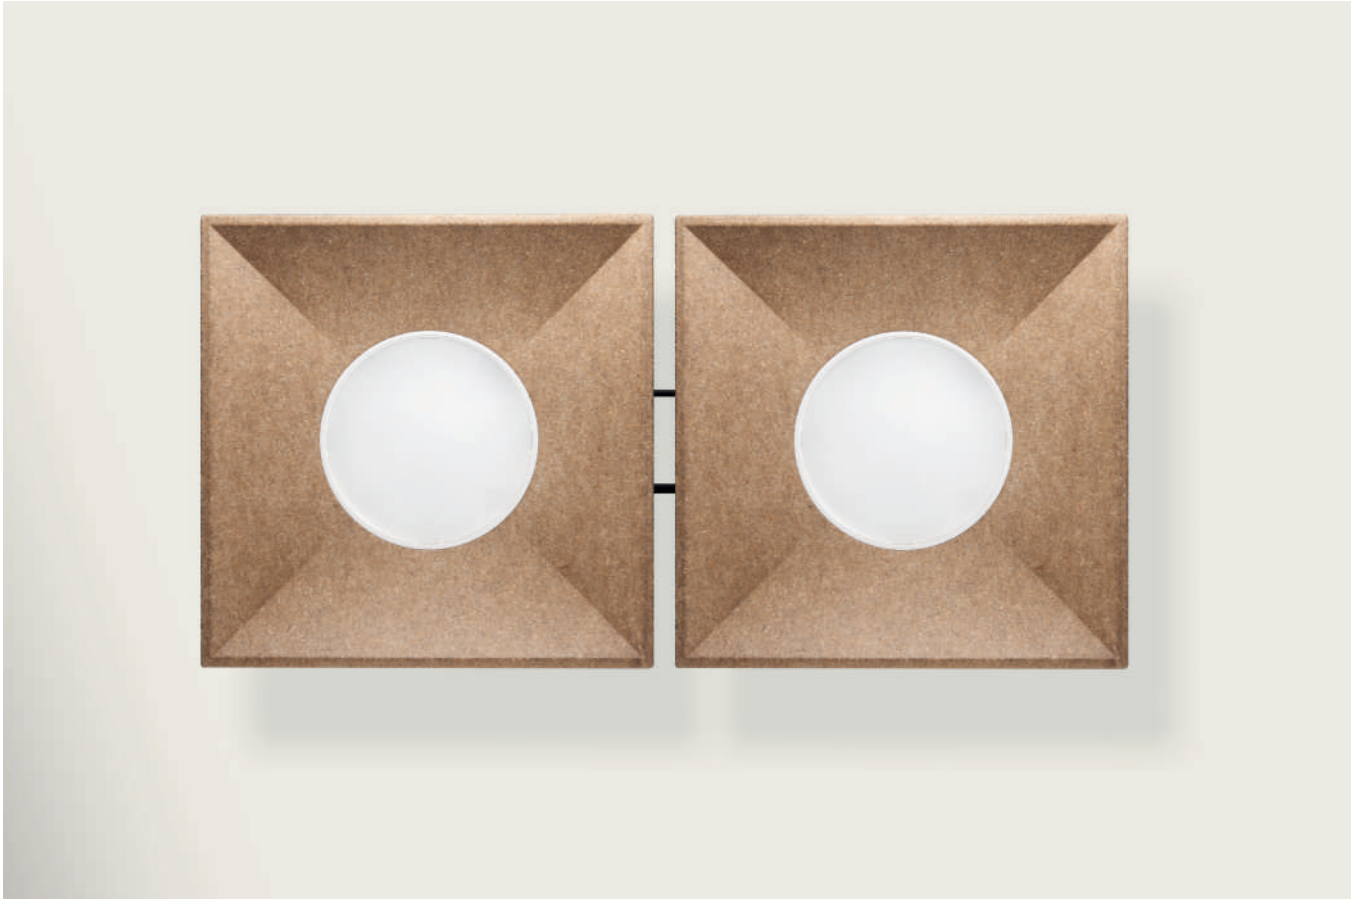



60 PENDANT

600×600 mm

3000K | 4000K | Tunable White

up to 3976lm

up to 139lm/W

UGR<19



dB PENDANT

600×600 mm

3000K | 4000K | Tunable White

up to 3274lm

up to 115lm/W

UGR<19



60 LINEN PENDANT

600×600 mm

3000K | 4000K | Tunable White

up to 3496lm

up to 123lm/W

UGR<19

Other versions available

Downlights and recessed luminaires p. 34

Light Shed 60 recessed

Smart accessories for Light Shed 60



Cover with bracket for external / semi-recessed camera



Cover with bracket for recessed camera



Cover with multi-sensor lux and movement

3000K | 4000K | Tunable White (2700K ÷ 6500K)

CRI80 | CRI90

IP20 | IP43

1 size

MPO (Micro Prismatic Optic)

Class II

Casambi

DALI-2 | DALI-2 Sensor

ON/OFF Emergency

Adapter for camera

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes



01 White

15 Grey

07 Green

E8 Gold-satin

S0 Ecru


16 Blue

Other awards:
Gold Certificate a "Les Grands Prix du Design" 2022
IES Progress Report 2023

Visit our website for more information


IN30 EVO

design iGuzzini




SYSTEM OPAL

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1700lm/m
up to 102lm/W
GL
Frame | Minimal
CRI80 | CRI90




SYSTEM HIGH CONTRAST

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 2500lm/m
up to 95lm/W
S | F | WF | VWF
Frame | Minimal
CRI90




SYSTEM WALL WASHER

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1250lm/m
up to 85lm/W
WW
Frame | Minimal
CRI80 | CRI90



STAND-ALONE OPAL

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1700lm/m
up to 102lm/W
GL
Frame | Minimal
CRI80 | CRI90



STAND-ALONE HIGH CONTRAST

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 2500lm/m
up to 95lm/W
S | F | WF | VWF
Frame | Minimal
CRI90

Other versions available

Ceiling luminaires p. 250 / Linear systems p. 177

Evo System Opal

Evo System High Contrast

Evo System Wall Washer

2700K | 3000K | 3500K | 4000K
CRI80 | CRI90
IP20
Frame | Minimal
GL | UGR <10 | WW
Class I
Down | Up & Down emission
DALI-2 | CASAMBI | EMERGENCY (Integral)

Intelligent Light Solutions

Smart controls:

Organic Response | Quick BLE
(Casambi) | Quick DALI | Master Pro
Evo

Smart services:

Space management | Push notification

Finishes

01 White
04 Black
12 Aluminium

Visit our website for more information

iN30 EVO available from September 2026


IN45

design iGuzzini



SYSTEM OPAL SCREEN

600 | 1200 | 2400 mm
3000K | 4000K
Up to 2300 lm/m (UGR <24)
Up to 1400 lm/m (UGR <22)
Up to 140 lm/W
GL
Frame
CRI90



SYSTEM OFFICE SCREEN

600 | 1200 | 2400 mm
3000K | 4000K
Up to 1050 lm/m
Up to 120 lm/W
UGR <19
Frame
CRI90



SYSTEM SYSTEM RASTER

600 | 1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
Up to 3300 lm/m
Up to 150 lm/W
UGR <19
Frame
CRI90




SYSTEM WALL WASHER

600 | 1200 | 2400 mm
3000K | 4000K
Up to 2000 lm/m
Up to 110 lm/W
WW
Frame
CRI90




SYSTEM MAINS VOLTAGE TRACK

1200 | 2400 mm
MV track inside the product



STAND-ALONE OPAL SCREEN

1200 | 2400 mm
3000K | 4000K
Up to 2300 lm/m (UGR <24)
Up to 1400 lm/m (UGR <22)
Up to 140 lm/W
GL
CRI90



STAND-ALONE OFFICE SCREEN

1200 | 2400 mm
3000K | 4000K
Up to 1050 lm/m
Up to 120 lm/W
UGR <19
CRI90



STAND-ALONE RASTER

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
Up to 3300 lm/m
Up to 150 lm/W
UGR <19
CRI90

Other versions available

Ceiling luminaires p. 248

System
Opal Screen

System
Raster

System
Office Screen

System
Wall Washer



System
Mains Voltage
Track

IN45

design iGuzzini

Pendants p. 135

System
Opal Screen



System
Raster

System
Office Screen



System
Wall Washer



System
Mains Voltage
Track

Stand-Alone
Opal Screen



Stand-Alone
Raster



Stand-Alone
Wall Washer

3000K | 4000K

CRI90

IP20

GL | UGR <19 | WW

Down | Up & Down emission

Class I

Organic Response (Control + sensor | DALI-2 | DALI-2 sensor | DALI-2 Emergency DALI monitoring 3 h (Self-contained) | Casambi | Casambi sensor

Intelligent Light Solutions

Smart controls:

Organic Response

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes

01
White

V0
Matte black

Visit our website
for more information

iN45 available from
October 2026

IN60 EVO

design iGuzzini



Bros Manifatture headquarters - Montegiorgio, Italy — Product: iN60 Evo - 2400 mm | MMO | UGR<19 | White/Aluminium
Ph: Studio Buschi


IN60 EVO

design iGuzzini



SYSTEM SPACE

White Transparent | Black Transparent
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K | Tunable White
up to 6059lm/m
up to 169lm/W
GL | UGR<19
Up & Down adjustable emission



SYSTEM MMO

Metalized Modular Optic
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K | Tunable White
up to 5696lm/m
up to 154lm/W
UGR<19



SYSTEM MPO

Micro Prismatic Optic
600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 1596lm/m
up to 141lm/W
UGR<19
Angular luminous module




SYSTEM OPAL

600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 4898lm/m
up to 147lm/W
GL
Angular luminous module



SYSTEM WALL WASHER

600 | 1200 mm
LED Module
3000K | 3500K | 4000K
up to 1970lm
up to 104lm/W
WW



STAND-ALONE SPACE

1200 | 2400 mm
with sensor - 1300 | 2500 | 2600 mm
3000K | 3500K | 4000K
up to 14546lm
up to 168lm/W
GL | UGR<19



STAND-ALONE MMO

1200 | 2400 mm
with sensor - 1300 | 2500 | 2600 mm
3000K | 3500K | 4000K
up to 13763lm
up to 154lm/W
UGR<19



STAND-ALONE MPO

1200 | 2400 mm
3000K | 3500K | 4000K
up to 3830lm
up to 141lm/W
UGR<19



STAND-ALONE OPAL

1200 | 2400 mm
3000K | 3500K | 4000K
up to 11752lm
up to 147lm/W
GL

Other versions available

Fixtures for mains voltage track p. 76



iN60 Evo System Space



iN60 Evo System MMO

iN60 Evo System MPO

iN60 Evo System Opal

Linear system p. 180

iN60 Evo System Opal

iN60 Evo System MPO



iN60 Evo System MMO



iN60 Evo System Space



iN60 Evo System Wall Washer

Smart accessories for iN60 Evo

Organic Response



Quick BLE (Casambi)

DALI-2



Li-Fi

3000K | 3500K | 4000K | Tunable White (2700K - 6500K)

CRI80 | CRI90

IP20

GL | UGR<19

Up & Down | Down emission | Up & Down indipendent control

Class I

Organic Response (control + sensor)

Casambi | Casambi sensor | Casambi HF sensor

DALI-2 | DALI-2 sensor

Li-Fi

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

04 Black

12 Aluminium

Visit our website for more information

IN30

design iGuzzini



Innoliving offices - Ancona, Italy — Product: iN30 - High contrast | UGR<10 | module 2×10 cells | 1462×32×75 mm | White
Ph: Studio Buschi

PENDANT LOW CONTRAST

1200 | 2400 | 600×600 mm

3000K | 4000K

up to 4081lm

up to 107lm/W

GL



PENDANT HIGH CONTRAST

1200 mm (2×5 cells) | 1400 mm (2×10 cells)

3000K | 4000K

up to 4131lm

up to 90lm/W

WF

Other versions available

Ceiling luminaires p. 252

Downlights and recessed luminaires p. 38

Linear system p. 174

iN30 ceiling low contrast

iN30 ceiling high contrast

iN30 recessed low contrast

iN30 recessed high contrast

iN30 ceiling low contrast



iN30 ceiling high contrast

iN30 pendant low contrast



iN30 pendant high contrast

3000K | 4000K

CRI80 | CRI90 | CRI95

IP20

2 versions

Fixed

Frame

Class I

DALI-2

Finishes



01
White



04
Black

12
Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

ISIGN

design Jean-Marie Duthilleul



Xeito offices - Madrid, Spain — Product: iSign - Ø80 mm | Clear transparent
Ph: Javier de Paz García



PENDANT

Ø80 mm

3000K | 4000K

up to 4415lm

up to 124lm/W

Other versions available

Wall luminaires p. 214



iSign

3000K | 4000K

CRI80

IP67 | IK08

1630 | 1910 mm

LED

Class II

DALI-2 | Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finish

24
Clear transparent

Visit our website
for more information

LINEALUCE 27

design Jean-Michel Wilmotte



Product: Linealuce 27 - Pendant Full Remote | Flood | Rust brown



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80

Other versions available

Ceiling luminaires p. 254



Linealuce 27 surface Full remote

Floor recessed luminaires

Linealuce 27 recessed Full Remote

Linear systems p. 186

Linealuce 27 recessed Full Remote

Linealuce 27 surface Full remote

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

reddot winner 2023 best of the best

Other awards:
Grand Prix du Design (Gold) 2024
BrightStar Award 2024

Visit our website for more information

BETWO

design Alfonso Femia/AF*design



Product: Betwo - Down light | general lighting | Ø114 mm | White-champagne/White-transparent
Ph: Paolo Carlini



PENDANT GENERAL LIGHTING

Ø114 | Ø172 | Ø234 mm
up to 8352lm
up to 123lm/W
GL
Up & Down | Down emission



PENDANT UGR<19

Ø172 | Ø234 mm
up to 5188lm
up to 125lm/W
UGR<19
Up & Down | Down emission



PURE PENDANT GENERAL LIGHTING

Ø114 | Ø172 | Ø234 mm
up to 8352lm
up to 123lm/W
GL
Up & Down | Down emission



PURE PENDANT UGR<19

Ø172 | Ø234 mm
up to 5188lm
up to 125lm/W
UGR<19
Up & Down | Down emission

Other versions available

Fixtures for mains voltage track p. 70

Ceiling luminaires p. 228



BeTwo



Be Two Pure



BeTwo Ceiling



BeTwo Pure Ceiling

3000K | 3500K | 4000K
CRI90
IP40
3 sizes
Up & Down | Down emission
Opti Diamond
Class I
DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management |
Push notification

Optical finish



D8
White

Body finishes



G0
White/White



G2
Black/Black



I1
White/Champagne



I3
Black/Champagne



R4
White/Transparent



R5
Black/Transparent



R6
Champagne/Transparent

Optical finish



D8
Black

Body finishes



G1
White/White



I2
Black/Black



I4
White/Champagne



M6
Black/Champagne



R7
White/Transparent



R8
Black/Transparent



R9
Champagne/Transparent

reddot winner 2024
best of the best

DESIGN AWARD 2024

Visit our website
for more information

EASY

design iGuzzini



“Rosalía de Castro” library in Vilagarcía de Arousa Vilagarcía De Arousa, Spain — Product: Easy - Pendant | UGR<19 | Ø172×180 mm | White/Aluminium
Ph: Luis Diaz Diaz





PENDANT GENERAL LIGHTING
Ø114 | Ø172 | Ø234 mm
3000K | 3500K | 4000K
up to 4725lm
up to 131lm/W
GL
Frame
Fixed

PENDANT UGR<19
Ø172 | Ø234 mm
3000K | 3500K | 4000K
up to 4410lm
up to 136lm/W
UGR<19
Frame
Fixed

Other versions available

Downlights and recessed luminaires p. 20



Easy

Ceiling luminaires p. 232



Easy ceiling

3000K | 4000K
CRI80 | CRI90
IP20 | IP40 | IP54
3 sizes
Class I
DALI-2
ON/OFF Emergency

Body finishes

01 White

04 Black

Optical finishes

01 White

12 Aluminium

39 White/Aluminium

Intelligent Light Solutions

Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management | Push notification

Visit our website for more information

LE PERROQUET

design Piano Design



Monterosa 91 - Milan, Italy — Product: Le Perroquet - Ø156 mm | Grey
Ph: Michele Nastasi



PENDANT Ø89 mm
3000K
up to 1768lm
up to 79lm/W
M | F | WF



PENDANT Ø156 mm
3000K
up to 3665lm
up to 97lm/W
S | F | WF



PENDANT Ø162 mm
3000K
up to 4305lm
up to 99lm/W
M | F | WF



PENDANT Ø55 mm FOR FILORAIL

2700K | 3000K | 3500K | 4000K

up to 496lm

up to 74lm/W

S | M | WF



PENDANT Ø80 mm FOR FILORAIL

2700K | 3000K | 3500K | 4000K

up to 1434lm

up to 99lm/W

S | M | WF

Other versions available

Fixtures for low voltage track p. 98

Ceiling luminaires p. 242

Wall luminaries p. 208



Le Perroquet for Filorail



Le Perroquet pendant for Filorail



Le Perroquet wall/ceiling



Le Perroquet surface pendant



Le Perroquet surface



Le Perroquet recessed pendant



Le Perroquet wall/ceiling

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP40

5 sizes

OptiBeam Reflector | OptiBeam Lens

Class I, III

Casambi

DALI-2 | DALI Powerline

Rotation 360° | Tilting 90°

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01
White

74
Gray/Black

Visit our website for more information

NEWFO

design iGuzzini





Ø88 mm FOR MAINS VOLTAGE TRACK
up to 1818lm
up to 101lm/W
S | M | F | WF
Class II
DALI-2 | Casambi



Ø116 mm FOR MAINS VOLTAGE TRACK
up to 2519lm
up to 105lm/W
M | F | WF
Class II
DALI-2 | Casambi



PENDANT Ø88 mm FOR MAINS VOLTAGE TRACK
up to 1818lm
up to 101lm/W
M | F | WF
Class II
DALI-2 | Casambi



PENDANT Ø116 mm FOR MAINS VOLTAGE TRACK
up to 2519lm
up to 105lm/W
F | WF
Class II
DALI-2 | Casambi



LOW VOLTAGE PENDANT Ø88 mm FOR LOW VOLTAGE TRACK

up to 1818lm

up to 108lm/W

F | WF

Class III

DALI Powerline | Casambi



LOW VOLTAGE PENDANT Ø116 mm FOR LOW VOLTAGE TRACK

up to 1818lm

up to 108lm/W

F | WF

Class III

DALI Powerline | Casambi



LOW VOLTAGE PENDANT Ø88 mm FOR SUPERRAIL

up to 2519lm

up to 114lm/W

F | WF

Class III

DALI Powerline | Casambi

Other versions available

Fixtures for mains voltage track p. 60

Other versions available

Fixtures for low voltage track p. 94



Newfo



Newfo pendant



Newfo Low Voltage for Filorail



Newfo Low Voltage pendant for Filorail



Newfo Low Voltage



Newfo Low Voltage pendant



Newfo Low Voltage for Superrail



Newfo Low Voltage pendant for Superrail

Ceiling luminaires



Newfo surface



Newfo surface pendant



Newfo recessed



Newfo recessed pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP43

2 sizes

Rotation 360° | Tilting 90°

Optibeam Reflector | Optibeam Lens | Optibeam Refractor

Class II, III

Casambi

DALI-2 | DALI Powerline

ON/OFF

Smart Accessory for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Master Pro Evo

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body finishes

01 White

04 Black

N8 Titanium

Optical finishes

04 Black

N8 Titanium

U7 Brass

V6 Matte Copper

Visit our website for more information

TECNICA EVO

design iGuzzini



TECNICA Ø92 mm PENDANT

3000K | 4000K

up to 3506lm

up to 126lm/W

M | F | WF



TECNICA Ø117 mm PENDANT

3000K | 4000K

up to 5263lm

up to 137lm/W

M | F | WF | VWF



TECNICA Ø117 mm FOOD PENDANT

2700K | 3000K | 6500K

up to 3849lm

up to 101lm/W

F

Other versions available

Downlights and recessed luminaires p. 32

Fixtures for mains voltage track p. 68



Tecnica Evo recessed



Tecnica Evo



Tecnica Evo pendant

2700K | 3000K | 4000K | 6500K

CRI80 | CRI90

IP20

2 sizes

Rotation 360° | Tilting 90°

Reflector

Food version

Class II

DALI-2 | ON/OFF

Finishes

01 White

04 Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

TACK

design iGuzzini



Ø60 mm PENDANT

3000K | 3500K | 4000K

up to 1766lm

up to 153lm/W

S | M | F | WF



Ø80 mm PENDANT

3000K | 3500K | 4000K

up to 3088lm

up to 171lm/W

SS | S | M | F | WF



Ø90 mm PENDANT

3000K | 3500K | 4000K

up to 4352lm

up to 177lm/W

SS | S | M | F | WF

Other versions available

Downlights and recessed luminaires p. 66

Fixtures for mains voltage track p. 30

Ceiling luminaires p. 246



Tack recessed



Tack



Tack pendant



Tack ceiling

3000K | 3500K | 4000K

CRI90

IP20 | IP40

3 sizes

Rotation 358° | Tilting 80°

Lens | Reflector

Class II

DALI-2

Finishes

01
White

V0
Matte black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

Tack: recessed available
from May 2026

LASER

design iGuzzini



Seville Nautical Club - Seville, Spain — Product: Laser - Pendant | Ø 75 mm | White
Ph: courtesy of Jacinto Pérez Elliot Arquitectura



PENDANT

Ø59 | Ø75 mm
2700K | 3000K | 4000K
CRI90
up to 1615lm
up to 104lm/W
M | F | WF



PENDANT FOR FILORAIL

Ø59 | Ø75 mm
2700K | 3000K | 3500K | 4000K
CRI90
up to 1615lm
up to 106lm/W
M | F | WF



PENDANT FOR LOW VOLTAGE TRACK

Ø59 | Ø75 mm
2700K | 3000K | 4000K
CRI90
up to 1615lm
up to 107lm/W
M | F | WF

Other versions available

Downlights and recessed luminaires p. 28

Fixtures for low voltage track p. 100

Ceiling luminaires p. 100



Laser fixed round



Laser fixed square



Laser adjustable round



Laser Wall Washer round



Laser Wall Washer square



Laser pendant for low voltage track



Laser pendant for Filorail



Laser ceiling

2700K | 3000K | 3500K | 4000K
CRI90
IP20 | IP44 | IP65
6 sizes
Fixed | Adjustable
Frame | Minimal
Class I
Phase-cut
Casambi
DALI-2 | DALI Powerline
UGR<10

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Body finishes

01 White
04 Black

Optical finishes

01 White
14 Gold
E8 Gold-satin
E7 Chrome
E6 Burnished chrome
04 Black


Other awards
FX International Interior Design Award 2016

Visit our website for more information

LASER BLADE XS

design iGuzzini



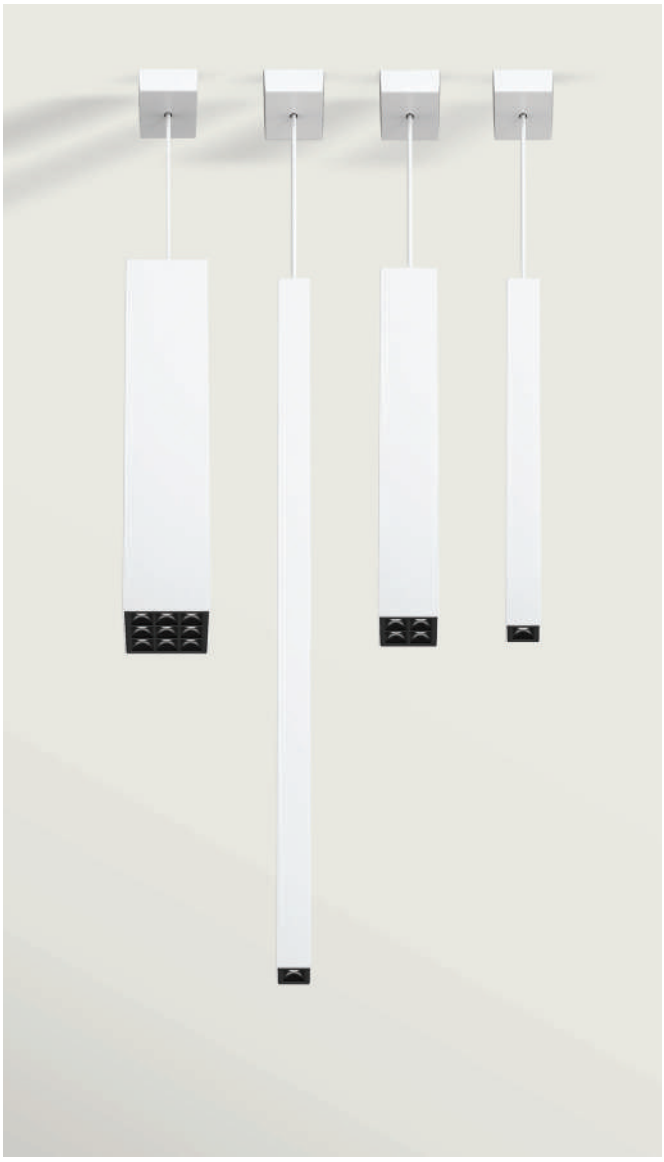

Xeito offices - Madrid, Spain — Product: Laser Blade XS - Pendant | 26×26×600 mm | White
Ph: Javier de Paz García



HIGH CONTRAST - PENDANT

1 | 2X2 | 3X3 cells
2700K | 3000K | 4000K
up to 1930lm
up to 118lm/W
MF | WF



HIGH CONTRAST PENDANT FOR FILORAIL

3 | 5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K
up to 1700lm
up to 102lm/W
F | WF



HIGH CONTRAST - LOW VOLTAGE TRACK PENDANT

3 | 5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K
up to 1535lm
up to 104lm/W
F | WF

Other versions available

Downlights and recessed luminaires p. 6



Laser Blade XS Higt Contrast



Laser Blade XS Wall Washer LGC



Laser Blade Wall Washer



Laser Blade XS General lighting Pro



Laser Blade XS High Contrast - adjustable

Ceiling luminaires p. 226

Laser Blade XS High Contrast - ceiling

Laser Blade XS Wall Washer - ceiling

Laser Blade XS General lighting Pro - ceiling

Fixtures for low voltage track p. 102



Laser Blade XS High Contrast for Filorail



Laser Blade XS Wall Washer LGC for Filorail

Laser Blade XS General lighting Pro for Filorail



Laser Blade XS High Contrast - Low Voltage track



Laser Blade XS General Lighting Pro - Low Voltage track



Laser Blade XS Wall Washer - Low Voltage track

Laser Blade XS General Lighting Pro - Low Voltage track

Laser Blade XS High Contrast for Superrail

Laser Blade XS General Lighting Pro for Superrail

Laser Blade XS Wall Washer LGC for Superrail

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP43

4 sizes

Class II, III

ON/OFF

Casambi

DALI | DALI Broadcast | DALI Powerline |

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body finishes

01 White

C1 Traffic white

B1 Signal white

V0 Matte black

04 Black

Optical finishes

01 White

14 Gold

E6 Burnished chrome

04 Black

Other awards
Lighting Design Award 2017
Design L+B 2018
German Design Award 2019

Visit our website for more information

ISOLA

design iGuzzini



"Rosalía de Castro" library in Vilagarcía de Arousa Vilagarcía De Arousa, Spain — Product: Isola - Pendant | Ø600 mm | GL | UGR<19 | White
Ph: Luis Diaz Diaz



PENDANT

Ø600 | Ø900 | Ø1200 mm

3000K | 4000K | Tunable White

up to 25000lm

up to 156lm/W

GL | UGR<19

Other versions available

Downlights and recessed luminaires
p. 42

Isola recessed

Wall luminaires
p. 212

Isola wall

Ceiling luminaires
p. 234

Isola ceiling

3000K | 4000K | Tunable White (2700K÷6500K)

CRI80 | CRI90

IP20 | IP40

3 sizes

Class II

GL | UGR<19

DALI-2

Up & Down | Down emission

Finishes



01
White



04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification


Visit our website
for more information

IPLAN

design iGuzzini



AAC Academy - Hamburg, Germany — Product: iPlan - UGR<19 | Up & Down light | 1200×300 mm | Aluminium
Ph: Heiner Leiska

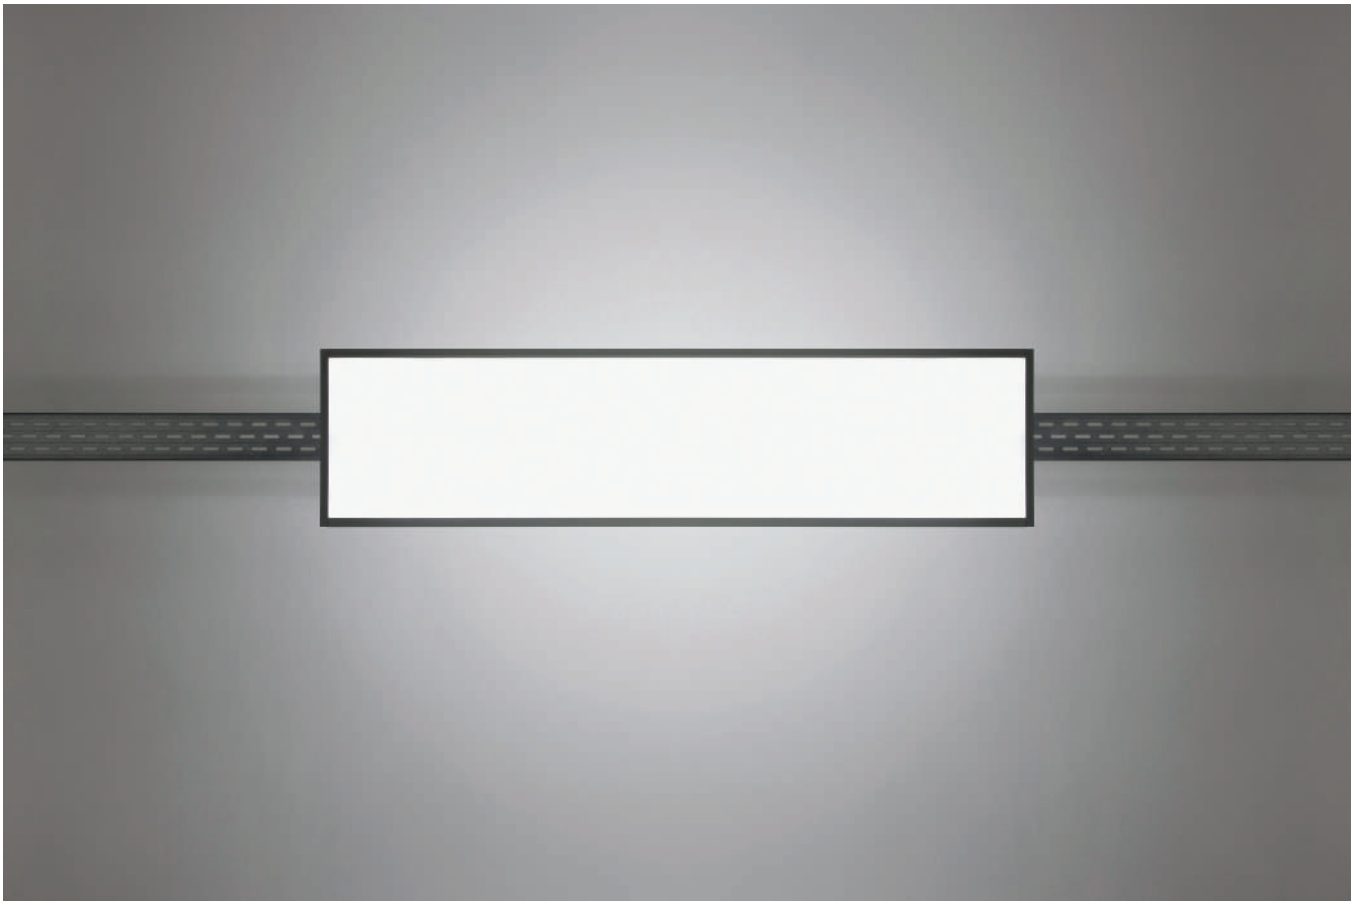



PENDANT RECTANGULAR

1200×300 mm

3000K | 4000K

up to 4781lm

up to 115lm/W

GL | UGR<19

Other versions available

Wall luminaires p. 213



iPlan wall

Table and floor lamps p. 268

iPlan floor lamp

3000K | 4000K

CRI80

IP20

1 size

Class I

DALI-2

Up & Down | Down emission

Finish

12
Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

IPLAN ACCESS

design iGuzzini





SQUARE PENDANT
600×600 mm | 625×625 mm
3000K | 3500K | 4000K
up to 3700lm
up to 117lm/W
GL | UGR<19

RECTANGULAR PENDANT
1200×300 mm
3000K | 3500K | 4000K
up to 3600lm
up to 110lm/W
GL | UGR<19

Other versions available

Ceiling luminaires p. 256

Pendants p. 164

iPlan Access square ceiling mounted

iPlan Access rectangular ceiling mounted

iPlan Access square recessed

iPlan Access rectangular recessed

3000K | 4000K
CRI80 | CRI90
IP20 | IP40
3 sizes
Class II
DALI-2 | Lux and motion sensor
Down emission
GL | UGR <19

Finishes

12
Aluminium

Intelligent Light Solutions

Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management | Push notification

Visit our website for more information

IPLAN NEXT

design iGuzzini



SQUARE PENDANT
600×600 | 625x625 mm
up to 4700lm
up to 160lm/W
UGR<19

RECTANGULAR PENDANT
1200×3000 mm
up to 4700lm
up to 160lm/W
UGR<19

Other versions available

Ceiling luminaires p. 257

iPlan Next square ceiling mounted

iPlan Next rectangular ceiling mounted

Downlights and recessed luminaires p. 44

iPlan Next square recessed

iPlan Next rectangular recessed

3000K | 4000K
CRI90
IP20 | IP40
3 sizes
Class II
UGR<19
Down emission
ON/OFF
Organic Response (control + sensor)
Casambi | Casambi sensor
DALI-2 | DALI-2 sensor

Finish

01
White

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website for more information

iPlan Next: ON/OFF, Casambi available from May 2026

DROP BY DROP

design Alfonso Femia/AF*design



Villa Borromeo d'Adda - Arcore, Italy — Product: Drop by drop - Accent lighting | Ø300 mm
Ph: Stefano Anzini





ACCENT LIGHTING
Ø300 mm
3000K
up to 2730lm
up to 72lm/W
Down emission

GENERAL LIGHTING
Ø300 mm
3000K
up to 2420lm
up to 76lm/W
Down emission

3000K
CRI80
IP20
1 size
WF | GL
Class I
DALI-2

Intelligent Light Solutions
Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Smart services:
Space management | Push notification

Finishes

65
Nitric

07
Chromo

German Design Award 2020

Visit our website
for more information

CLAN

design Harveiluce



Product: Clan - Ø520 | White
Ph: Paolo Carlini



PENDANT

Ø400 | Ø520 mm

2700K

up to 2452 lm

up to 163 lm/W

Down emission

Other versions available

Table and floor lamps p. 270



Clan table/floor



Clan floor

iGuzziniEchoes

3000K lamp not included

CRI80

IP20

2 sizes

GL

Class II

ON/OFF

Finishes

01
White

06
Yellow

I6
Matte green

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

ZURIGO

design Luigi Massoni



Product: Zurigo - 400 mm | Matte light blue
Ph: Alessandro Saletta - DSL Studio



PENDANTS
400 mm
3000K
up to 1320lm
up to 73lm/W



PENDANTS
520 mm
3000K
up to 1300lm
up to 72lm/W



PENDANTS
840 mm
3000K
up to 1411lm
up to 78lm/W

iGuzziniEchoes

3000K lamp not included
CRI80
IP20 | IP43
3 sizes
Fixed
LED
Class II

Intelligent Light Solutions

Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management |
Push notification

Finishes

01
White

04
Black

14
Gold

24
Clear trasparent

I6
Matte green

I7
Matte light blue

I8
Matte blue

V2
Black cherry red

Visit our website
for more information



LINEAR SYSTEMS

174 | IN30 EVO

175 | IN45



177 | IN60 EVO

180 | IN30



182 | LIBERA



184 | LIGHT SHED 14



186 | LINEALUCE 27



188 | LINEALUCE 47



190 | UNDERSCORE




192 | UNDERSCORE INOUT



194 | UNDERSCORE
LEDSTRIP


IN30 EVO

design iGuzzini




SYSTEM OPAL

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1700lm/m
up to 102lm/W
GL
Frame | Minimal
CRI80 | CRI90




SYSTEM HIGH CONTRAST

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 2500lm/m
up to 95lm/W
S | F | WF | VWF
Frame | Minimal
CRI90




SYSTEM WALL WASHER

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1250lm/m
up to 85lm/W
WW
Frame | Minimal
CRI80 | CRI90



STAND-ALONE OPAL

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1700lm/m
up to 102lm/W
GL
Frame | Minimal
CRI80 | CRI90



STAND-ALONE HIGH CONTRAST

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 2500lm/m
up to 95lm/W
S | F | WF | VWF
Frame | Minimal
CRI90

Other versions available

Ceiling luminaires p. 250 / Linear system p. 174

Evo System Opal

Evo System High Contrast

Evo System Wall Washer

Pendants p. 134

Evo System Opal

Evo System High Contrast

Evo System Wall Washer

Evo Stand-alone Opal

Evo Stand-alone High Contrast

2700K | 3000K | 3500K | 4000K
CRI80 | CRI90
IP20
Frame | Minimal
GL | UGR <10 | WW
Class I
Down | Up & Down emission
DALI-2 | CASAMBI | EMERGENCY (Integral)

Intelligent Light Solutions

Smart controls:

Organic Response | Quick BLE
(Casambi) | Quick DALI | Master Pro
Evo

Smart services:

Space management |
Push notification

Finishes

01 White
04 Black
12 Aluminium

Visit our website for more information

iN30 EVO available from September 2026


IN45

design iGuzzini



SYSTEM OPAL SCREEN

600 | 1200 | 2400 mm
3000K | 4000K
Up to 2300 lm/m (UGR <24)
Up to 1400 lm/m (UGR <22)
Up to 140 lm/W
GL
Frame
CRI90



SYSTEM OFFICE SCREEN

600 | 1200 | 2400 mm
3000K | 4000K
Up to 1050 lm/m
Up to 120 lm/W
UGR <19
Frame
CRI90



SYSTEM SYSTEM RASTER

600 | 1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
Up to 3300 lm/m
Up to 150 lm/W
UGR <19
Frame
CRI90




SYSTEM WALL WASHER

600 | 1200 | 2400 mm
3000K | 4000K
Up to 2000 lm/m
Up to 110 lm/W
WW
Frame
CRI90




SYSTEM MAINS VOLTAGE TRACK

1200 | 2400 mm
MV track inside the product



STAND-ALONE OPAL SCREEN

1200 | 2400 mm
3000K | 4000K
Up to 2300 lm/m (UGR <24)
Up to 1400 lm/m (UGR <22)
Up to 140 lm/W
GL
CRI90



STAND-ALONE OFFICE SCREEN

1200 | 2400 mm
3000K | 4000K
Up to 1050 lm/m
Up to 120 lm/W
UGR <19
CRI90



STAND-ALONE RASTER

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
Up to 3300 lm/m
Up to 150 lm/W
UGR <19
CRI90

Other versions available

Ceiling luminaires p. 248

System Opal Screen

System Raster

System Office Screen

System Wall Washer



System Mains Voltage Track

IN45

design iGuzzini

Pendants p. 135

System
Opal Screen



System
Raster

System
Office Screen



System
Wall Washer



System
Mains Voltage
Track

Stand-Alone
Opal Screen



Stand-Alone
Raster



Stand-Alone
Office Screen

3000K | 4000K

CRI90

IP20

GL | UGR <19 | WW

Down | Up & Down emission

Class I

Organic Response (Control + sensor | DALI-2 | DALI-2 sensor | DALI-2 Emergency DALI monitoring 3 h (Self-contained) | Casambi | Casambi sensor

Intelligent Light Solutions

Smart controls:

Organic Response

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes

01
White

V0
Matte black

Visit our website
for more information


iN45 available from
October 2026


IN60 EVO

design iGuzzini




Club Virgin Active Milano Bocconi - Milan, Italy — Product: iN60 Evo - System Opal | White
Ph: Paolo Carlini









SYSTEM SPACE
White transparent | Black transparent
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K | Tunable White
up to 6059lm/m
up to 169lm/W
GL | UGR<19
Up & Down adjustable emission

SYSTEM MMO
Metalized Modular Optic
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K | Tunable White
up to 5696lm/m
up to 154lm/W
UGR<19

SYSTEM MPO
Micro Prismatic Optic
600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 1596lm/m
up to 141lm/W
UGR<19
Angular luminous module

SYSTEM OPAL
600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 4898lm/m
up to 147lm/W
GL
Angular luminous module

IN60 EVO

design iGuzzini



SYSTEM WALL WASHER

600 | 1200 mm

LED Module

3000K | 3500K | 4000K

up to 1970lm

up to 104lm/W

WW

Other versions available

Downlights and recessed luminaires p. 36

iN60 Evo System Space

iN60 Evo System MMO

iN60 Evo System MPO

iN60 Evo System Opal

iN60 Evo System Wall Washer

Fixtures for main voltage track p. 76



iN60 Evo System Space



iN60 Evo System MMO

iN60 Evo System MPO

iN60 Evo System Opal

Pendants p. 137

iN60 Evo Stand-alone Opal

iN60 Evo Stand-alone MPO



iN60 Evo Stand-alone MMO



iN60 Evo Stand-alone Space

iN60 Evo System Opal

iN60 Evo System MPO



iN60 Evo System MMO



iN60 Evo System Space

Smart accessories for iN60 Evo

Organic Response



Quick BLE (Casambi)

DALI-2



Li-Fi

3000K | 3500K | 4000K | Tunable White (2700K - 6500K)

CRI80 | CRI90

IP20

GL | UGR<19

Up & Down | Down emission | Up & Down indipendent control

Class I

Organic Response (control + sensor)

Casambi | Casambi sensor | Casambi HF sensor

DALI-2 | DALI-2 sensor

Li-Fi

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

04 Black

12 Aluminium

Visit our website for more information



Politecnico di Milano's Architecture Campus - Milan, Italy — Product: iN60 Evo - System Opal | White
Ph: Michele Nastasi

IN30

design iGuzzini



Innoliving offices - Ancona, Italy — Product: iN30 - High contrast | UGR<19 | White
Ph: Studio Buschi



RECESSED LOW CONTRSAT

1200 | 2400 | 600×600 mm
3000K | 4000K
up to 4081lm
up to 107lm/W
GL
Frame
CRI80

RECESSED HIGH CONTRAST

1200 mm (2×5 cells) | 1400 mm (2×10 cells)
3000K | 4000K
up to 4131lm
up to 90lm/W
WF
Frame
CRI90 | CRI95

PENDANT LOW CONTRAST

1200 | 2400 | 600×600 mm
3000K | 4000K
up to 4081lm
up to 107lm/W
GL



PENDANT HIGH CONTRAST

1200 mm (2×5 cells) | 1400 mm (2×10 cells)
3000K | 4000K
up to 4131lm
up to 90lm/W
WF

CEILING LOW CONTRAST

1200 | 2400 | 600×600 mm

3000K | 4000K

up to 4081lm

up to 107lm/W

GL

CEILING HIGH CONTRAST

1200 mm (2×5 cells) | 1400 mm (2×10 cells)

3000K | 4000K

up to 4131lm

up to 90lm/W

WF

Other versions available

Downlights and recessed luminaires p. 38

iN30 recessed Low Contrat

iN30 recessed high contrast

Pendants p. 140

iN30 pendant Low Contrast



iN30 pendant Higt Contrast

Ceiling luminaires p. 252

iN30 ceiling Low Contrast

iN30 ceiling Higt Contrast

3000K | 4000K

CRI80 | CRI90 | CRI95

IP20

2 versions

Class I

DALI-2

Finishes

01 White

04 Black

12 Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

LIBERA

design Artec Studio



Tenoha - Milan, Italy — Product: Libera - General lighting modules+Space lighting modules | Black/Transparent light
Ph: Paolo Carlini



SYSTEM - PENDANT

600 | 900 | 1200 | 1800 | 2300 | 2700 mm

up to 5287lm

up to 128lm/W

GL | UGR<19



STAND-ALONE PENDANT

1400 | 1800 mm

with sensor 1900 mm

up to 5222lm

up to 135lm/W

GL | UGR<19



STAND-ALONE PENDANT FOR FILORAIL

1200 | 1400 | 1800 mm

up to 4017lm

up to 145lm/W

GL | UGR<19

Other versions available

Wall luminaires p. 198



Libera System - wall



Libera stand-alone wall mounted

Table and floor lamps p. 266



Libera System - ceiling to floor



Libera stand-alone floor



Libera stand-alone ceiling to floor

Fixtures for low voltage track p. 106

Libera stand-alone pendant for Filorail

Linear systems p. 182



Libera System - pendant



Libera System - Space lighting modules



Libera System - General Li-ghting modules



Libera System - General Li-ghting modules without screen

Libera System - Led strip for Up light



Libera System - mounting and power supply accessories

Smart accessories for Libera



Organic Response



Quick BLE (Casambi)



DALI-2

2700K | 3000K | 3500K | 4000K
CRI90
6 lenghts
General Lighting | UGR<19
Space | Microtextured | Smoked
Up & Down | Down emission
Organic Response (control + sensor)
Casambi | Casambi Sensor
DALI-2 | DALI-2 Sensor
IP20
Class I

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Body finishes



01 White



04 Black



N8 Titanium



N9 Sapphire

Optical finishes



R4 White transparent



83 Black Transparent



B9 Smoked



P2 Microtextured

Other awards
BrightStar Award 2024
Grand Prix du Design (Gold and Platinum) 2024
Production Innovation Award 2024
Good Design 2024

Visit our website for more information

LIGHT SHED 14

design iGuzzini



HSBC Bank branch_Montevideo, Uruguay — Product: Light shed 14 - 2383×140×48 mm | Up & Down emission | UGR<19 | Black/ transparent white
Ph: Santiago Chaer





CEILING MOUNTED	PENDANT
1200 | 1600 | 2400 | 3200 mm	1200 | 1600 | 2400 | 3200 mm
up to 14760lm	up to 14760lm
up to 161lm/W	up to 161lm/W
UGR<19	UGR<19
Opti Diamond	Opti Diamond

Other versions available

Fixtures for main voltage track p. 74

Ceiling luminaires p. 247

Pendants p. 130



Light Shed 14
track

Light Shed 14
ceiling mounted



Light Shed 14
pendant

Smart accessories for Light Shed 14



Organic
Response



Quick BLE
(Casambi)



DALI-2

3000K | 4000K	**Intelligent Light Solutions**	**Body finishes**
CRI80 | CRI90	**Smart controls:**	01 White
IP20	Organic Response (control + sensor)	04 Black
4 lenghts	Quick BLE (Casambi)	**Optical finishes**
Opti Diamond - UGR<19	Quick DALI	R4 White transparent
Emergency	Master Pro Evo	83 Black Transparent
Class I		
Up & Down | Down emission	**Smart services:**	
Organic Response (control + sensor)	Space management | Push notification	
Casambi		
DALI-2 | DALI-2 sensor		
Class I		

Visit our website
for more information

LINEALUCE 27

design Jean-Michel Wilmotte



Mercato Centrale - Milan, Italy — Product: Linealuce 27 - Wall Grazing
Ph: Alessandra Chemollo



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80

Other versions available

Ceiling luminaires p. 258



Linealuce 27 surface Full remote

Floor recessed luminaires p. 408

Linealuce 27 recessed Full Remote

Linear systems p. 368

Linealuce 27 recessed Full Remote

Linealuce 27 surface Full remote

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

reddot winner 2023 best of the best

Other awards:
Grand Prix du Design (Gold) 2024
BrightStar Award 2024

Visit our website for more information

LINEALUCE 47

design Jean-Michel Wilmotte



Zooprophylaxis Institute Ancona, Italy — Product: Linealuce 47 - Recessed Integral | Rust brown
Ph: iGuzzini archive



SURFACE REMOTE

2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
47×83 mm
340 | 611 | 908 | 1205 | 1502 mm
up to 5530lm
up to 96lm/W
WGS | WGM | WGWF | S | F | WF
CRI80



SURFACE INTEGRAL

2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
47×83 mm
340 | 611 | 908 | 1205| 1502 mm
up to 5530lm
up to 88lm/W
WGS | WGM | WGWF | S | F | WF
CRI80



SURFACE INTEGRAL SIDE BOX

2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
102×52 mm
340 | 611 | 908 | 1205| 1502 mm
up to 5146lm
up to 86lm/W
WGS | WGM | WGWF
CRI80



RECESSED REMOTE

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87×106 mm
340 | 610 | 907 | 1204| 1501 mm
up to 4260lm
up to 89lm/W
WGS | WGM | WGWF | WF
CRI80



RECESSED INTEGRAL

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 84lm/W

WGS | WGM | WGWF | WF

CRI80

Other versions available

Ceiling luminaires p. 260



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce47 recessed Remote



Linealuce 47 recessed Integral

Downlights and recessed Luminaries p. 425

Linear systems p. 370



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce47 recessed Remote



Linealuce 47 recessed Integral

Recessed wall luminaires p. 419



Linealuce47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGB-W 3000K | RGB-W 4000K | Tunable White

CRI80

IP66, IP67 | IK06, IK10

Class II, III

Walkable (2000kg)

DALI-2 | DMX-RDM

Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey



F5 Rust brown

Visit our website for more information

UNDERSCORE

design iGuzzini



Playfair Library at Edinburgh University Edinburgh, Scotland — Product: Underscore
Ph: Paul Zanre Photography



15 RECESSED

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Frame recessed low linear profile
- Frame recessed high linear profile
- Minimal recessed high linear profile
- Opal diffuser screen
- Traslucid diffuser screen



15 SURFACE-MOUNTED

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Surface low linear profile
- Surface high linear profile
- Opal diffuser screen




15 CORNER

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Angular profile
- Opal diffuser screen
- Translucid diffuser screen



15 PERIMETRAL

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Perimetral Profile
- Opal diffuser screen
- Translucid diffuser screen



18 PERIMETRAL


Ledstrip 12V - RGB

Ledstrip 24V - RGBW | Tunable White

Miminal recessed high linear profile

Opal diffuser screen

Traslucid diffuser screen



18 SURFACE

Ledstrip 12V - RGB

Ledstrip 24V - RGBW | Tunable White

Surface high linear profile

Opal diffuser screen

Traslucid diffuser screen



18 PERIMETRAL

Ledstrip 12V - RGB

Ledstrip 24V - RGBW | Tunable White

Perimetral profile

Opal diffuser screen

Traslucid diffuser screen

Other versions available

Led strips / Lighting Effect luminaires p. 294



Underscore15 Recessed



Underscore15 Surface-mounted



Underscore15 Corner



Underscore15 Perimetral



Underscore18 Recessed Minimal



Underscore18 Surface



Underscore18 Perimetral

Aluminium profiles compatible with Underscore Ledstrip

Visit our website for more information

UNDERSCORE INOUT

design iGuzzini



Piazza della Libertà - Macerata, Italy — Product: Underscore InOut - Side Bend 16 mm
Ph: iGuzzini archive



SIDE BEND 10 mm

2600K | 2900K | 3700K | 4600K | RGB

L from 254 mm to 7004 mm

up to 3448lm

up to 73lm/W

GL

CRI80



SIDE BEND 16 mm

2600K | 2900K | 3700K | 4600K | RGB | Tunable white

L from 254 mm to 7004 mm

up to 3690lm

up to 78lm/W

GL

CRI80



TOP BEND 16 mm

2600K | 2900K | 3800K | 4600K | RGB | Tunable white


L from 254 mm to 7004 mm

up to 5601lm

up to 74lm/W

GL

CRI80



PIXEL TOP BEND 16 mm

RGBW

L from 337 mm to 7004 mm

up to 1281lm

up to 25lm/W

GL (addressable every 83 mm)

Other versions available

Lighting Effect luminaires p. 296



Underscore InOut Side Bend 10 mm



Underscore InOut Side Bend 16 mm



Underscore InOut Top Bend 16 mm



Underscore InOut Top Bend 16 mm

2600K | 2900K | 3700K | 3800K | 4600K | RGB | Tunable White | RGB-W

CRI80

IP68 | IK10

Class III

PWM 24Vdc | SPI

Power supply
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01
White

ArchiExpo i-NOVO Awards 2016


Visit our website
for more information

UNDERSCORE LEDSTRIP

design iGuzzini




Avalokiteśvara altar - Zhoushan Islands, Zhejiang, China — Product: Underscore ledstrip
Ph: Meng Wang




HIGH PERFORMANCE
5 mt
2700K | 3000K | 3500K | 4000K
up to 14075lm
up to 152lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 50 mm



TUBE HIGH PERFORMANCE
5 mt
2700K | 3000K | 3500K | 4000K
up to 12975lm
up to 141lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 50 mm




COB
5 mt
2700K | 3000K | 4000K | RGBW | Tunable White
up to XXlm
up to XXlm
24V
XXW/m | XXW/m | XXW/m | XXW/m
Free-cut 50 mm



12/24V
5 mt
3000K | 4000K | RGBW
up to 10500lm
up to 140lm/W
24V
15W/m | 20W/m
Free-cut 100 mm



TUBE NO-DOT 24V
5 mt
2700K | 3000K | 3500K | 4000K
up to 10475lm
up to 100lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 26 mm



TUBE 12/24V
5 mt
2700K | 3000K | 4000K | RGB
up to 10000lm
up to 104lm/W
12V | 24V
14W/m | 19W/m
Free-cut 125 mm



TUBE SIDE 12V
5 mt
2700K | 3000K | 4000K | RGB
up to 2650lm
up to 110lm/W
12V
5W/m
Free-cut 50 mm

Other versions available

Led strips / Lightning effect luminaires p. 292




Underscore Ledstrip High Performance



Underscore Ledstrip Tube High Performance




Underscore Ledstrip CoB



Underscore Ledstrip 12/24V



Underscore Ledstrip tube no-dot 24V



Underscore Ledstrip tube 12/24V



Underscore Ledstrip tube side 12V

2200 | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White
CRI90
IP20
1 lenght
General Lighting
Class III
Power supply to be ordered separately
12V | 24V
Casambi
DALI - 2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor) | Quick BLE (Casambi) | Quick DALI | Master Pro Evo

Smart services:

Space management | Push notification

Finish

01
White

Visit our website for more information

Underscore CoB available from May 2026


GIACINTO MOTTA

WALL LUMINARIES



198 | LIBERA



200 | VIEW



202 | SIPARIO



204 | PALCO



208 | LE PERROQUET



210 | NEWFO

212 | ISOLA



213 | IPLAN



214 | ISIGN



215 | MOTUS




216 | ALLURE



218 | LINGOTTO



220 | IPRO



222 | LIGHT UP ORBIT

LIBERA

design Artec Studio







SYSTEM - WALL

600 | 900 | 1200 | 1800 |2300 | 2700 mm

2700K | 3000K | 3500K | 4000K

up to 5287lm

up to 128lm/W

GL | UGR<19

STAND-ALONE WALL MOUNTED

600 | 1200 mm

2700K | 3000K | 4000K

up to 1827lm

up to 110lm/W

GL

Smart accessories for Libera



Organic Response



Quick BLE (Casambi)



DALI-2

Libera stand-alone pendant for Filorail

2700K | 3000K | 3500K | 4000K

CRI90

5 lenghts

General Lighting | UGR<19

Space | Microtextured | Smoked

Up & Down | Down emission

Organic Response (control + sensor)

Casambi | Casambi Sensor

DALI-2 | DALI-2 Sensor

Matter

PWM

ON/OFF

IP20

Class I

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Other versions available

Pendants p. 128



Libera System - pendant

Libera stand-alone pendant

Libera stand-alone pendant for Filorail

Table and floor lamps p. 266



Libera System - ceiling to floor



Libera stand-alone pendant




Libera stand-alone ceiling to floor

Linear systems p. 182



Libera System - pendant



Libera System - Space lighting modules



Libera System - General Lighting modules



Libera System - general lighting modules without screen



Libera System - mounting and power supply accessories

Body finishes



01 White



04 Black



N8 Titanium



N9 Sapphire

Optical finishes



R4 White transparent



83 Black Transparent



B9 Smoked



P2 Microtextured

Other awards

BrightStar Award 2024
Grand Prix du Design (Gold and Platinum) 2024
Production Innovation Award 2024
Good Design 2024

Visit our website for more information

VIEW

design iGuzzini/Arup



Politecnico di Milano's Architecture Campus - Milan, Italy — Product: View - Wall mounted 210×144 mm | White
Ph: Michele Nastasi





WALL MOUNTED 170×124 mm	WALL MOUNTED 210×144 mm
3000K | 4000K	3000K | 4000K
up to 2880lm	up to 3520lm
up to 85lm/W	up to 79lm/W
WW	WW

Other versions available

Fixtures for mains voltage track p. 58



View Opti Linear

3000K | 4000K
CRI80
IP20
2 sizes
OptiBeam Lens
Class I
DALI-2

Finishes

01
White

47
White/Black

reddot winner 2017
best of the best

DESIGN AWARD 2017

Other awards
German Design Award 2019

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:


Space management |
Push notification

Visit our website
for more information

SIPARIO

design iGuzzini





SURFACE Ø22 mm

up to 160lm

up to 76lm/W

S | M

Opti Beam Lens



SURFACE Ø40 mm

up to 648lm

up to 67lm/W

M | F | WF

Opti Beam Lens



SURFACE Ø56 mm

up to 1186lm

up to 91lm/W

M | F | WF | VWF | WW

Opti Beam Lens | Optibeam Refractor



RECESSED Ø22 mm

up to 160lm

up to 76lm/W

S | M

Opti Beam Lens



RECESSED Ø40 mm

up to 648lm

up to 67lm/W

M | F | WF

Opti Beam Lens



RECESSED Ø56 mm

up to 1186lm

up to 91lm/W

M | F | WF | VWF | WW

Opti Beam Lens | Optibeam Refractor

Other versions available

Fixtures for main voltage track p. 48

Fixtures for low voltage track p. 82

Ceiling luminaires p. 236



Sipario



Sipario Zoom framer



Sipario beamer



Sipario Low Voltage



Sipario Low Voltage With rod



Sipario surface



Sipario recessed

2700K | 3000K | 3500K | 4000K

CRI90 | CRI97

IP20

3 sizes

Opti Beam Lens | Opti Beam Refractor

Class III (DALI-2 | Casambi | ON/OFF: with external power supply to be ordered separately)

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01
White

V0
Matte black


Visit our website for more information

PALCO

design Artec Studio



Puju Tea Space - Hangzhou, China — Product: Palco - Surface Ø19 mm | Black
Ph: Hanmo Vision, Song Ye




SURFACE Ø19 mm

up to 154lm

up to 77lm/W

M

Opti Beam Lens



SURFACE Ø37 mm

up to 504lm

up to 62lm/W

S | WF

Opti Beam Lens




SURFACE Ø51 mm

up to 1014lm

up to 67lm/W

S | WF

Opti Beam Lens



SURFACE Ø19 mm FRAMER

up to 21lm

Framer

Gobo 5°

Class III



SURFACE Ø37 mm FRAMER

up to 173lm

Framer

Gobo 5° - 10°

Class III

PALCO

design Artec Studio



RECESSED Ø19 mm

up to 154lm

up to 77lm/W

M

Opti Beam Lens



RECESSED Ø37 mm

up to 504lm

up to 62lm/W

S | WF

Opti Beam Lens



RECESSED Ø51 mm

up to 1014lm

up to 67lm/W

S | WF

Opti Beam Lens




RECESSED Ø19 mm FRAMER

up to 21lm

Framer

Gobo 5°

Class III



RECESSED Ø37 mm FRAMER

up to 173lm


Framer

Gobo 5° - 10°

Class III

ACCESSORIES OPTI BEAM REFRACTOR

1 Interchangeable reflector
2 Refractor for medium elliptical distribution
3 Refractor for broad elliptical distribution
4 Soft Lens Filter
5 Honeycomb louvre
6 Cylindrical screen
7 Directional fins.

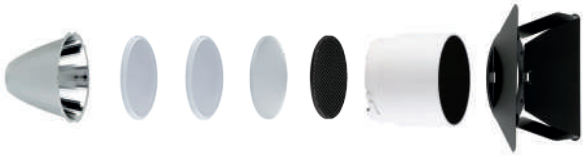

1 2 3 4 5 6 7

ACCESSORIES OPTI BEAM LENS

8 Opti Beam Refractor Medium
9 Opti Beam Refractor Flood
10 Opti Beam Refractor Wide Flood
11 Refractor for medium elliptical distribution
12 Refractor for broad elliptical distribution
13 Honeycomb louvre



8 9 10 11 12 13

Other versions available

Fixtures for low voltage track p. 86



Palco Low Voltage for Filorail



Palco Low Voltage Framer for Filorail



Palco Low Voltage Wall Washer for Filorail



Palco Low Voltage



Palco Low Voltage Wall Washer

Ceiling luminaires p. 238




Palco surface



Palco framer surface



Palco recessed



Palco framer recessed

2700K | 3000K | 4000K

CRI90

IP20

Class III (DALI-2 | Casambi | ON/OFF: with external power supply to be ordered separately

Opti Beam Lens | Framer

Finishes



01
White



04
Black

Other awards
Premio dei premi per l'innovazione 2018
CODEGA 2018
German Design Award 2018
Delta award 2018
Progress Report Selection 2020

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

LE PERROQUET

design Piano Design



Headquarters of the council of Europe - Bruxelles, Belgium — Product: Le Perroquet - Ø156 mm | White
Ph: Marc Detiffe



SURFACE Ø55 mm

2700K | 3000K | 3500K | 4000K

up to 496lm

up to 74lm/W

S | M | WF



Ø89 mm

up to 1768lm

up to 79lm/W

M | F | WF



Ø156 mm

up to 3665lm

up to 97lm/W

S | F | WF



Ø162 mm

up to 4305lm

up to 99lm/W

M | F | WF

Other versions available

Fixtures for mains voltage track p. 62

Fixtures for low voltage track p. 98

Pendants p. 150

Ceiling luminaires p. 242



Le Perroquet



Le Perroquet pendant



Le Perroquet for Filorail



Le Perroquet pendant for Filorail



Le Perroquet pendant



Le Perroquet surface



Le Perroquet recessed

ACCESSORIES

1 Refractor for elliptical distribution
2 Cylindrical screen
3 Directional fins



1 2 3

3000K

CRI90

IP20 | IP40

3 sizes

OptiBeam Reflector

Class III (DALI-2 | Casambi | ON/OFF: with external power supply to be ordered separately | DALI-2

Rotation 360° | Tilting 90°

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

06 Yellow

02 Orange

04 Black

05 Red


09 Sky blue

15 Grey

Visit our website for more information

NEWFO

design iGuzzini



SURFACE Ø62 mm
up to 896lm
up to 87lm/W
S | M | F | WF



SURFACE Ø88 mm
up to 1818lm
up to 108lm/W
M | F | WF

Other versions available

Fixtures for low voltage track p. 94

Fixtures for mains voltage track p. 60



Newfo Low Voltage for Filorail



Newfo Low Voltage pendant for Filorail



Newfo Low Voltage for Low Voltage track



Newfo Low Voltage pendant for Low Voltage track



Newfo for Mains Voltage track



Newfo pendant for Mains Voltage track

Ceiling luminaires



Newfo surface



Newfo surface pendant



Newfo recessed



Newfo recessed pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP43

2 sizes

360° | 355° | 90°

Optibeam Reflector | Optibeam Lens | Optibeam Refractor

Class II

Casambi

DALI-2

Class III (DALI-2 | Casambi | ON/OFF : with external power supply)

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body Finishes



01 White

04 Black

N8 Titanium

00 Titanium/White

00 Titanium/Black

Optical Finishes



04 Black

N8 Titanium

U7 Brass

V6 Matte copper

reddot winner 2025 best of the best

Visit our website for more information

ISOLA

design iGuzzini

Other versions available

Downlights and recessed luminaires p. 42

Pendants p. 160



Ceiling luminaires p. 234

WALL

Ø600 | Ø900 mm

3000K | 4000K

up to 13162lm

up to 151lm/W

GL

Up & Down emission

3000K | 4000K | Tunable White

CRI80 | CRI90

IP20 | IP40

3 sizes

Class II

GL | UGR<19

Up & Down | Down emission

DALI-2

Finishes

01
White

04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

IPLAN

design iGuzzini



WALL-MOUNTED

640×200×50 mm

3000K | 4000K

up to 3359lm

up to 113lm/W

UGR<19

Other versions available

Pendants p. 162



Table and floor lamps p. 268

3000K | 4000K

CRI80

IP20

Class I

Up & Down emission

DALI-2

Finish

12
Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

ISIGN

design Jean-Marie Duthilleul



WALL/CEILING

Ø80 mm

3000K | 4000K

up to 4415lm

up to 124lm/W

Other versions available

Pendants p. 142



3000K | 4000K

CRI80

IP67 | IK08

1630 | 1910 mm

LED

Class II

DALI-2

Emergency

Finish

24
Clear transparent

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

MOTUS

design iGuzzini









PICTOGRAM
Ceiling/Wall/Flag-mounted
Visibility 26 m
Operating modes SA e SE
Emergency autonomy 3h
Self-test

ESCAPE
Spacing 21 m
Recessed circular version
Surface-mounted square version
Autonomy 3h
Recharge time 12h
Self-test
Operating modes SA e SE
DALI monitoring (recessed versions)

ANTIPANIC
Recessed circular version
Surface-mounted square version
Autonomy 3h
Recharge time 12h
Self-test
Operating modes SA e SE
DALI monitoring (recessed versions)

SUP/INCAS
Opal diffuser
Surface-mounted / Semi-recessed
Autonomy 1-1,5-2-3h
Recharge time 12h
Self-test
DALI monitoring
Operating modes SA e SE

Other versions available

Wall luminaires



Emergency luminaires
Batteries LiFePO4
Automatic self-test
Versions with adjustable durations and light outputs
Recessed, wall, and ceiling installation
Versions with DALI monitoring

Intelligent Light Solutions

Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management | Push notification

DESIGN AWARD 2004

Other awards:
Innovation Technology Design 2004

Visit our website for more information

ALLURE

design iGuzzini



Boutique Krys - Montauban, France — Product: Allure - 120×150 mm | White
Ph: Didier Boy De La Tour



120×150 mm
2700K | 3000K | 3500K | 4000K
up to 1570lm
up to 120lm/W
AF | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS
1 PG
CRI80



120×250 mm
2700K | 3000K | 3500K | 4000K
up to 2456lm
up to 126lm/W
AF-DOWN | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS
2 PG through wiring
CRI80



GRAPHIC 120×150 mm
2700K | 3000K | 3500K | 4000K
up to 425lm
up to 42lm/W
L up | L down | ADJ Beam Up | ADJ Beam Down | L/ADJ Beam | ADJ Beam / L | L/L | ADJ Beam / ADJ Beam
1 PG
CRI80



SMART 120×150 mm
2700K | 3000K | 3500K | 4000K
up to 1570lm
up to 113lm/W
AF | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS
1 PG
CRI80



SMART 120×250 mm

2700K | 3000K | 3500K | 4000K

up to 2456lm

up to 126lm/W

AF-DOWN | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS

2 PG through wiring

CRI80

Other versions available

Lighting effect luminaires p. 304

Allure Graphic
120×150 mm

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06

Class I, II

ON/OFF

Casambi

DALI-2

Smart versions: HF motion (Plug& Play) | HF motion Casambi

Lower raster to be purchased separately

Polycarbonate flush-mounted cover 150×79 mm

Carter with visible edge in polycarbonate 150×79 mm

Casing with visible edge in PMMA 150×79 mm

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body Finishes Allure Graphic and Allure Smart

01 White
04 Black
07 Green
15 Grey
F5 Rust brown
F7 Shiny copper
H3 Shiny black
M3 Shiny sand
M4 Shiny lead
M5 Polished urban bronze
I9 Satin transparent

Body Finishes

01 White
04 Black
07 Green
15 Grey
F5 Rust brown

reddot winner 2024 best of the best

Other awards
Grand Prix du Design 2024
Good Design 2024

Visit our website for more information

LINGOTTO

design Renzo Piano



Monterosa 91 - Milan, Italy — Product: Lingotto without base | Grey/Yellow
Ph: Michele Nastasi







WITHOUT BASE
2200K | 3000K | 4000K
270×240 mm
up to 5380lm
up to 128lm/W
A60 | ST1.0 | ST1.5 | STCy0.5
Outgoing cable
CRI70 | CRI80

WITH BASE
2200K | 3000K | 3500K | 4000K
270×240 mm
up to 5380lm
up to 128lm/W
A60 | GL | ST1.0 | ST1.5 | STCy0.5
2PG
CRI65 | CRI70 | CRI80

WITH EXTERNAL BOX
2200K | 3000K | 3500K | 4000K | Tunable warm
270×240 mm
up to 6087lm
up to 116lm/W
S | F | WF | WW | A
CRI65 | CRI80
A | F | S | WF | WW

Other versions available

Pole mounted multiple flood p. 356



Pole minimal and connected



2200K | 3000K | 3500K | 4000K | Tunable warm
CRI65 | CRI70 | CRI80
IP66, IP20 | IK07, IK06
Class I, II
DALI-2 | Midnight preset/ZHAGA

Finishes



01
White



04
Black



15
Grey



F5
Rust brown



73
Grey/Yellow

Intelligent Light Solutions

Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management | Push notification





Visit our website
for more information

IPRO

design Mario Cucinella



Aiello Building Center - Rende, Italy — Product: iPro - Ø51 - Wall-mounted - Up & Down light | White
Ph: Giuseppe Saluzzi



51 mm WALL MOUNTED
3000K | 4000K
51×51×56 | 51×51×161 mm
up to 221lm
up to 49lm/W
VWF | L | L/VWF | VWF/VWF | L/L
1G
CRI80



81 mm WALL MOUNTED
3000K | 4000K
up to 494lm
up to 64lm/W
F | VWF | L
2 PG
CRI80



132 mm WALL MOUNTED
3000K | 4000K
up to 1522lm
up to 109lm/W
F | VWF | WF | S | M
2 PG
CRI80



155 mm WALL MOUNTED
3000K | 4000K | Tunable white
up to 2457lm
up to 97lm/W
VWF | WF
2 PG
CRI80



192 mm WALL MOUNTED

3000K | 4000K | RGB | Tunable white

up to 6609lm

up to 111lm/W

F | M | S | VWF | WF

2 PG

CRI80

Other versions available

Floodlights p. 392



iPro

Pole mounted multiple flood p. 354



MultiPro on pole



MultiPro with minimal and connected pole



MultiPro wall mounted

Ceiling mounted p. 262



iPro ceiling mounted

Pole minimal and connected



MultiPro wall mounted

3000K | 4000K | RGB | Tunable white

CRI80

IP66 | IK07

Class I, II, III

ON/OFF | DALI-2 | DMX-RDM

Mounting accessories to be purchased separately

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

reddot winner 2010
best of the best

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

LIGHT UP ORBIT

design iGuzzini



Villa Waterfall - Porto Cervo, Italy — Product: Light Up Orbit - body in stainless steel
Ph: Stefano Ferrando, Studio Vetroblu



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L

CRI80



BODY IN STAINLESS STEEL FLUSH MOUNTED

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L | E

CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH MOUNTED

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | L | E

CRI80

Other versions available

Lighting Effect luminaires p. 302 / Recessed ceiling luminaries p. 424 / Recessed wall luminaires p. 414

Light Up Orbit Body in stainless steel

Light Up Orbit Body in stainless steel flush mounted

Light Up Orbit Body in stainless steel / all glass flush mounted



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush mounted




Light Up Orbit Body in stainless steel / all glass flush mounted



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush mounted



Light Up Orbit Body in stainless steel / all glass flush mounted

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III (DALI-2 | Casambi | ON/OFF : with external power supply)

Resistance to static load (2000kg)

Power supply to be ordered separately

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

04 Black

12 Steel

Visit our website for more information



CEILING LUMINARIES

226 | LASER BLADE XS



228 | BETWO



230 | LASER



232 | EASY

234 | ISOLA



236 | SIPARIO



238 | PALCO



242 | LE PERROQUET



246 | TACK



247 | LIGHT SHED 14

248 | IN45

250 | IN30 EVO

252 | IN30



254 | ISIGN

256 | IPLAN ACCESS

257 | IPLAN NEXT



258 | LINEALUCE 27



260 | LINEALUCE 47



262 | IPRO

LASER BLADE XS

design iGuzzini



Ruess Group offices - Stuttgart, Germany — Product: Laser Blade XS - High contrast + Wall washer | Black/black
Ph: Zooey Braun

HIGH CONTRAST - CEILING
1 | 5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K
up to 3150lm
up to 117lm/W
M | F | WF
CL I, III

WALL WASHER - CEILING
10 cells
2700K | 3000K | 3500K | 4000K
up to 820lm
up to 60lm/W
WW-LGC
CL I, III

GENERAL LIGHTING PRO - CEILING
5 | 10 | 15 cells
2700K | 3000K | 3500K | 4000K
up to 2830lm
up to 106lm/W
GL-PRO
CL I, III

Other versions available

Downlights and recessed luminaries p. 6

Pendants p. 158



Laser Blade XS High Contrast



Laser Blade XS Wall Washer LGC



Laser Blade XS Wall Washer



Laser Blade XS General Ligting Pro



Laser Blade XS Adjustable

Laser Blade XS High Contrast - pendant

Fixtures for low voltage track p. 102



Laser Blade XS High Contrast for Filorail



Laser Blade XS Wall Washer LGC for Filorail

Laser Blade XS General lighting Pro for Filorail

Laser Blade XS High Contrast pendant for Filorail



Laser Blade XS High Contrast - Low Voltage track



Laser Blade XS Wall Washer - Low Voltage Track

Laser Blade XS General Lighting Pro - Low Voltage track

Laser Blade XS High Contrast - Low Voltage track pendant

Laser Blade XS High Contrast for Superrail

Laser Blade XS General Lighting Pro for Superrail

Laser Blade XS Wall Washer LGC for Superrail

2700K | 3000K | 3500K | 4000K | Tunable White (2700K - 5700K)

CRI80 | CRI90

IP20

4 sizes

Fixed | Adjustable

Frame | Minimal

Class I

DALI-2 | ON/OFF

Class III (DALI-2 | ON/OFF : with external power supply o be oredered separately)

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body Finishes

01 White

C1 Traffic white RAL9016

B1 Signal white RAL9003

15 Grey

04 Black

V0 Matte black

Optical Finishes

01 White

04 Black

14 Gold

E6 Burnished chrome

Other awards
Lighting Design Award 2017
Design L+B 2018
German Design Award 2019

Visit our website for more information

BETWO

design Alfonso Femia/AF*design





CEILING GENERAL LIGHTING

Ø114 | Ø172 | Ø234 mm

up to 4324lm

up to 122lm/W



CEILING UGR<19

Ø172 | Ø234 mm

up to 2447lm

up to 122lm/W



PURE CEILING GENERAL LIGHTING

Ø114 | Ø172 | Ø234 mm

up to 4324lm

up to 122lm/W



PURE CEILING UGR<19

Ø172 | Ø234 mm

up to 2447lm

up to 122lm/W

Other versions available

Fixtures for mains voltage track p. 60

Pendants p. 152



Betwo



Betwo Pure



Betwo pendant



Betwo Pure pendant

3000K | 3500K | 4000K

CRI90

IP40

3 sizes

Down emission

Opti Diamond

Class I

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Body Finishes BeTwo



01
White



Q6
White champagne



04
Black



Q5
Black champagne

Body Finishes BeTwo Pure



D8
White transparent



83
Black transparent

Optical Finishes



D8
White transparent



83
Black transparent

reddot winner 2024
best of the best

DESIGN AWARD 2024

Visit our website
for more information

LASER

design iGuzzini



Format n10 - Milan, Italy — Product: Laser ceiling | Gold-satin
Ph: Riccardo Banfi



CEILING

Ø59 | Ø75

up to 1615lm

up to 103lm/W

M | F | WF

Other versions available

Downlights and recessed luminaries p. 28



Laser fixed round



Laser fixed square



Laser adjustable round



Laser Wall Wa-sher round



Laser Wall Wa-sher square

Fixtures for low voltage track p. 100

Pendants p. 156



Laser pendant for Filorail



Laser pendant for low voltage track



Laser pendant

2700K | 3000K | 4000K

CRI90

IP20

2 sizes

Class I

DALI-2 | Phase-cut

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body Finishes

01 White

04 Black

Optical Finishes

01 White

14 Gold

E8 Gold-satin

E7 Chrome

E6 Burnished chrome


04 Black

Other awards
FX International Interior Design Award 2016

Visit our website for more information

EASY

design iGuzzini

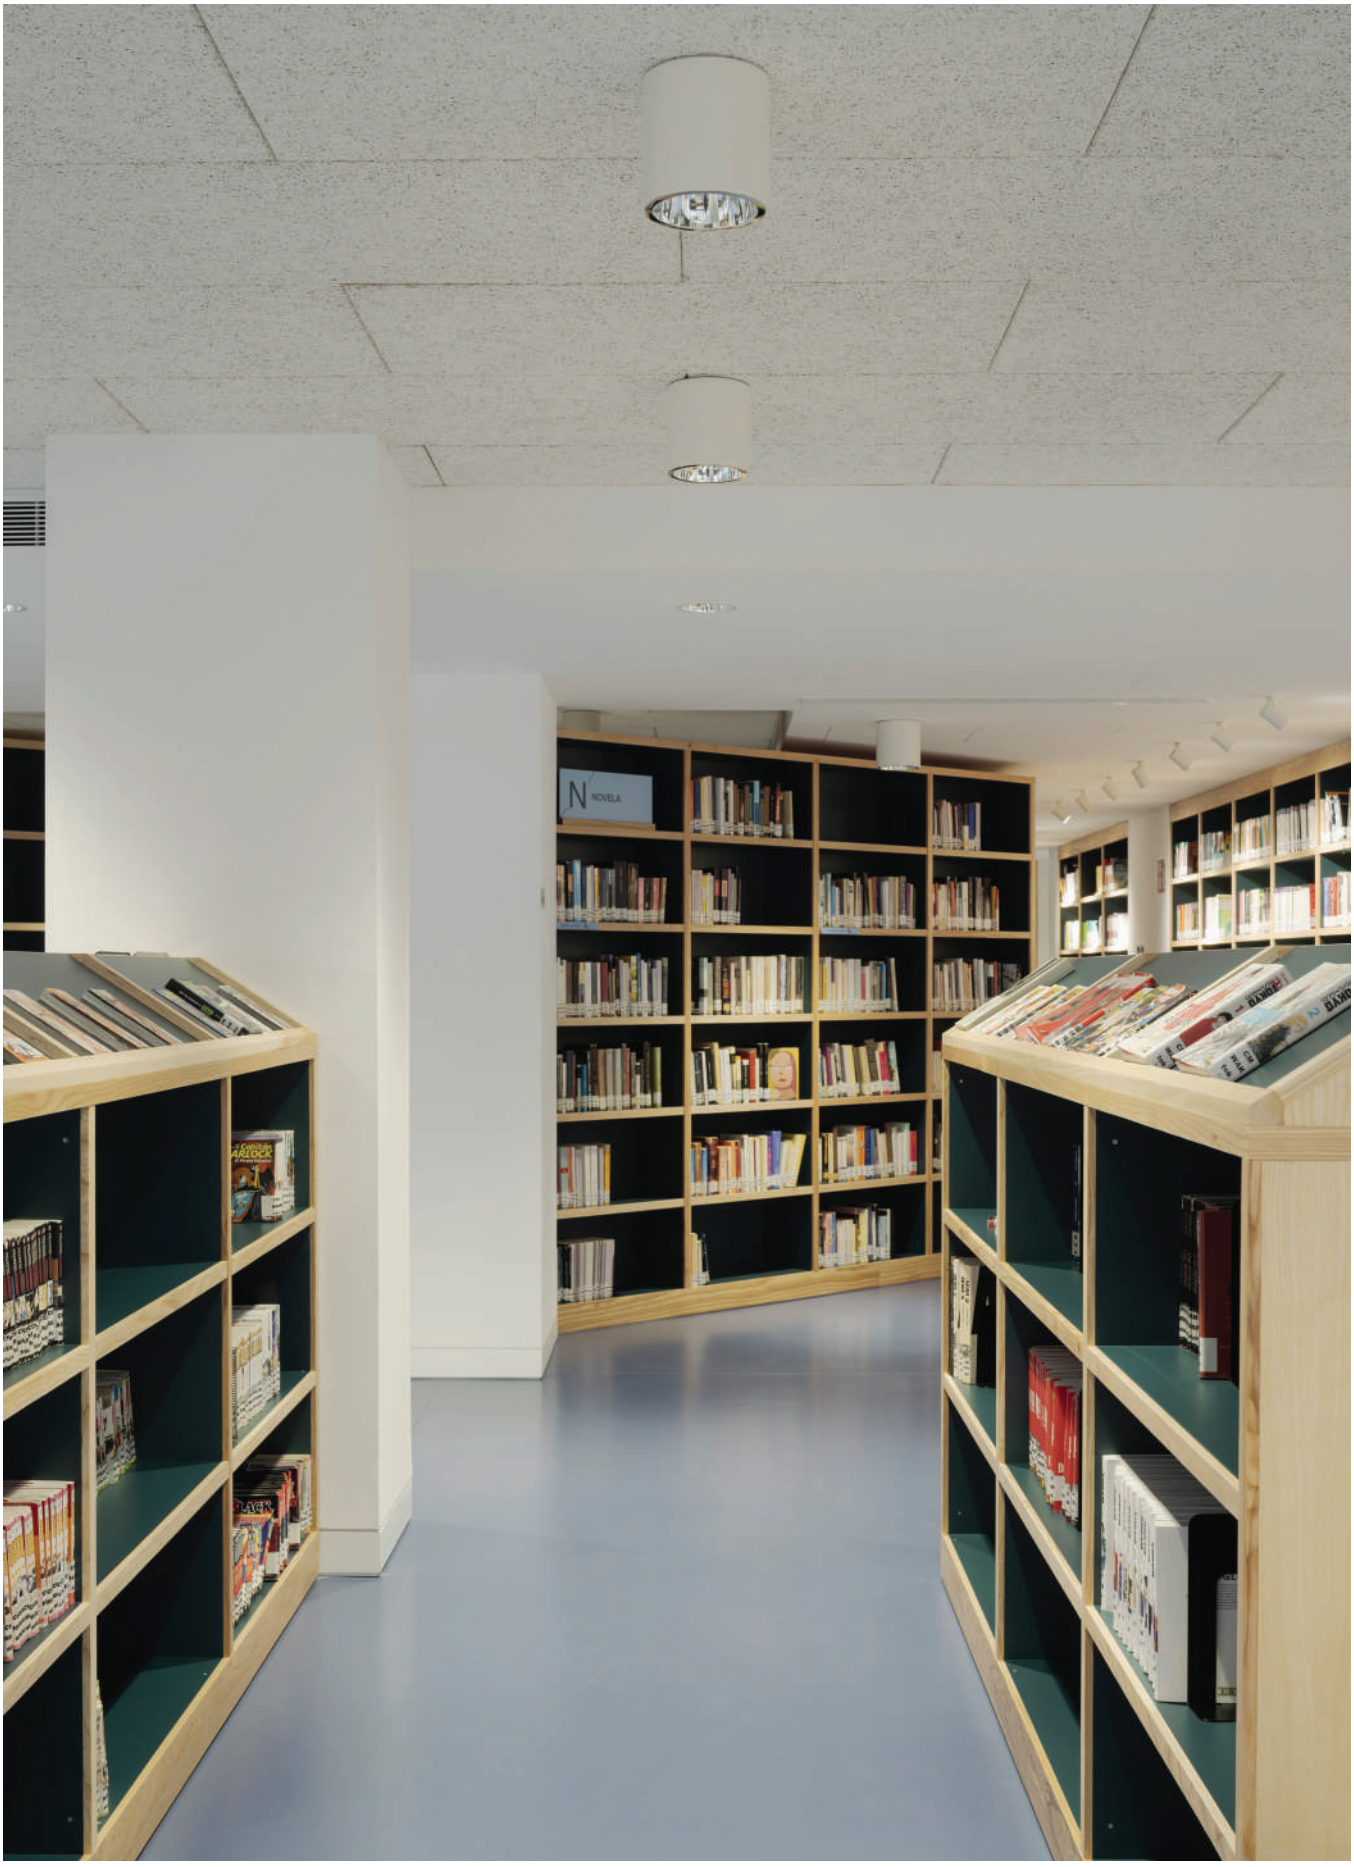

"Rosalía de Castro" library in Vilagarcía de Arousa Vilagarcía De Arousa, Spain — Product: Easy ceiling UGR<19 | White
Ph: Luis Diaz Diaz





CEILING GENERAL LIGHTING
Ø172 | Ø234 mm
3000K | 3500K | 4000K
up to 4725lm
up to 130lm/W

CEILING UGR<19
Ø114 | Ø172 | Ø234 mm
3000K | 3500K | 4000K
up to 4410lm
up to 135lm/W

Other versions available

Downlights and recessed luminaries p. 20

Pendants p. 148



Easy



Easy UGR<19



Easy GL



Easy



Easy UGR<19



Easy GL

3000K | 4000K
CRI80 | CRI90
IP20 | IP40 | IP54
2 sizes
Fixed
Frame
Class I
DALI-2
ON/OFF Emergency

Body Finishes

01
White

04
Black

Optical Finishes

01
White

12
Aluminium

39
White/Aluminium

Intelligent Light Solutions

Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Space management | Push notification

Visit our website
for more information

ISOLA

design iGuzzini



"Rosalía de Castro" library in Vilagarcía de Arousa Vilagarcía De Arousa, Spain - Product: Isola — Aura/down light | UGR<19 | White
Ph: Luis Diaz Diaz

CEILING LIGHT

Ø600 | Ø900 mm
3000K | 4000K
up to 13162lm
up to 156lm/W
GL | UGR <19
Up & Down | Down emission

Other versions available

Downlights and recessed luminaries p. 42

Isola recessed

Pendants p. 160



Isola pendant

Wall luminaires p. 212

Isola wall

3000K | 4000K | Tunable White
CRI80 | CRI90
IP20 | IP40
3 sizes
Class II
GL | UGR<19
Up & Down | Down emission
DALI-2

Finishes

01
White

04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

SIPARIO MONOPOINT

design iGuzzini





SURFACE Ø22 mm

up to 160lm

up to 76lm/W

S | M

Opti Beam Lens



SURFACE Ø40 mm

up to 648lm

up to 67lm/W

M | F | WF

Opti Beam Lens



SURFACE Ø56 mm

up to 1186lm

up to 91lm/W

M | F | WF | VWF | WW

Opti Beam Lens



RECESSED Ø22 mm

up to 160lm

up to 76lm/W

S | M

Opti Beam Lens



RECESSED Ø40 mm

up to 648lm

up to 67lm/W

M | F | WF

Opti Beam Lens



RECESSED Ø56 mm

up to 1186lm

up to 91lm/W

M | F | WF | VWF | WW

Opti Beam Lens

Other versions available

Fixtures for mains voltage track p. 48

Fixtures for low voltage track p. 82

Wall luminaires p. 202



Sipario



Sipario



Sipario Zoom Framer



Sipario Beamer



Sipario Low Voltage



Sipario Low Voltage with rod



Sipario surface



Sipario recessed

2700K | 3000K | 3500K | 4000K

CRI90 | CRI97

IP20

3 sizes

Opti Beam Lens

Class III (DALI-2 | Casambi | 0-10 V | ON/OFF: with external power supply to be ordered separately)

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01
White

V0
Matte black


Visit our website for more information

PALCO

design Artec Studio



Smriti Van Earthquake Museum & Memorial - Bhuj, Kutch, India — Product: Palco framer Ø99 mm
Ph: Bharat Aggarwal



SURFACE Ø19 mm

up to 154lm

up to 77lm/W

M

Opti Beam Lens



SURFACE Ø37 mm

up to 504lm

up to 62lm/W

S | WF

Opti Beam Lens




SURFACE Ø51 mm

up to 1200lm

up to 80lm/W

S | WF

Opti Beam Lens



SURFACE Ø19 mm FRAMER

up to 21lm

Framer

Gobo 5°

CL III



SURFACE Ø37 mm FRAMER

up to 173lm

Framer

Gobo 5° - 10°

CL III



RECESSED Ø19 mm

up to 154lm

up to 77lm/W

M

Opti Beam Lens



RECESSED Ø37 mm

up to 504lm

up to 62lm/W

S | WF

Opti Beam Lens



RECESSED Ø51 mm

up to 1200lm

up to 80lm/W

S | WF

Opti Beam Lens



RECESSED Ø19 mm FRAMER

up to 21lm

Framer

Gobo 5°

CL III



RECESSED Ø37 mm FRAMER

up to 173lm

Framer

Gobo 5° - 10°

CL III

PALCO

design Artec Studio



Pink Villa Design Studio - Stockholm, Sweden — Product: Palco Recessed / Surface, Palco surface Ø37mm
Ph: Max Rommel, courtesy of Nichetto Studio

Other versions available

Fixtures for mains voltage track p. 52

Wall luminaries p. 204



Palco Pro



Palco



Palco Wall Washer



Palco Framer



Palco Surface



Palco Framer Surface



Palco recessed



Palco Framer recessed

Fixtures for low voltage track p. 86



Palco Low Voltage for Filorail



Palco Low Voltage Framer for Filorail



Palco Low Voltage Wall Wa-sher for Filorail



Palco Low Voltage



Palco Low Voltage Wall Washer



Palco Low Voltage Framer



Palco Low Voltage with rod

2700K | 3000K | 4000K

CRI90

IP20

Class III (DALI-2 | Casambi | 0-10 V | ON/OFF: with external power supply to be ordered separately)

Opti Beam Lens | Framer

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

04 Black

Other awards
Premio dei premi per l'innovazione 2018
CODEGA 2018
German Design Award 2018
Delta award 2018
Progress Report Selection 2020

Visit our website for more information

LE PERROQUET

design Piano Design



Cultural Centre of the Stavros Niarchos Foundation Athens, Greece — Product: Le Perroquet - Ø156 mm | Grey
Ph: Michel Denancé



RECESSED Ø55 mm

up to 496lm

up to 74lm/W

S | M | WF



RECESSED Ø80 mm

up to 1436lm

up to 97lm/W

M | F | WF



SURFACE Ø55 mm

up to 496lm

up to 74lm/W

S | M | WF



SURFACE Ø80 mm

up to 1436lm

up to 97lm/W

M | F | WF



RECESSED Ø55 mm PENDANT

up to 496lm

up to 74lm/W

S | M | WF



RECESSED Ø80 mm PENDANT

up to 1436lm

up to 97lm/W

M | F | WF



SURFACE Ø55 mm PENDANT

up to 496lm

up to 74lm/W

S | M | WF



SURFACE Ø80 mm PENDANT

up to 1436lm

up to 97lm/W

M | F | WF



WALL/CEILING Ø89 mm

up to 1768lm

up to 79lm/W

M | F | WF



WALL/CEILING Ø156 mm

up to 3665lm

up to 98lm/W

S | F | WF



WALL/CEILING Ø162 mm

up to 4305lm

up to 99lm/W

M | F | WF

LE PERROQUET

design Piano Design



Private office - Chicago, USA — Product: Le Perroquet - Pendant | Ø156 mm | Grey/Black
Ph: Nic Lehoux

Other versions available

Fixtures for mains voltage track p. 62



Le Perroquet



Le Perroquet pendant

Fixtures for low voltage track p. 98



Le Perroquet for Filorail track



Le Perroquet for Filorail

Wall luminaries p. 208



Le Perroquet wall

Pendants p. 150



Le Perroquet pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP40

5 sizes

OptiBeam Reflector | Optibeam Lens

Class I (DALI-2)

Class III (DALI-2 | Casambi | 0-10 V | ON/OFF : with external power supply to be ordered separately)

DALI-2

360° Rotation | 90° Tilting

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

06 Yellow

02 Orange

04 Black

05 Red

09 Sky blue

15 Grey

Visit our website for more information

TACK

design iGuzzini



Ø60 mm CEILING

3000K | 3500K | 4000K

up to 1766lm

up to 153lm/W

S | M | F | WF



Ø80 mm CEILING

3000K | 3500K | 4000K

up to 3088lm

up to 171lm/W

SS | S | M | F | WF



Ø90 mm CEILING

3000K | 3500K | 4000K

up to 4352lm

up to 177lm/W

SS | S | M | F | WF

Other versions available

Downlights and recessed luminaries p. 30



Tack recessed

Pendants p. 155



Tack pendant

Fixtures for mains voltage track p. 66



Tack

3000K | 3500K | 4000K

CRI90

IP20 | IP40

3 sizes

Lens | Reflector

Class I

DALI-2

Finishes

01
White

V0
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website for more information

Tack: ceiling available from May 2026

LIGHT SHED 14

design iGuzzini



CEILING MOUNTED

1200| 1600| 2400| 3000 mm

up to 6500lm

up to 147lm/W

UGR<19

Opti Diamond

Other versions available

Fixture for main voltage track p. 74

Linear system p. 184

Pendants p. 130



Light Shed 14 track



Light Shed 14 track

Light Shed 14 ceiling mounted




Light Shed 14 pendant

Smart accessories for Light Shed 14



Organic Response



Quick BLE (Casambi)



DALI-2

3000K | 4000K

CRI80 | CRI90

IP20

4 lenghts

Opti Diamond - UGR<19

Emergency

Up & Down | Down emission

Class I

Organic Response (control + sensor)

Casambi

DALI-2 | DALI-2 sensor

Body Finishes

01 White

04 Black

Optical Finishes

R4 White transparent

83 Black Transparent

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

IN45

design iGuzzini

SYSTEM OPAL SCREEN
600 | 1200 | 2400 mm
3000K | 4000K
Up to 2300 lm/m (UGR <24)
Up to 1400 lm/m (UGR <22)
Up to 140 lm/W
GL
Frame
CRI90

SYSTEM OFFICE SCREEN
600 | 1200 | 2400 mm
3000K | 4000K
Up to 1050 lm/m
Up to 120 lm/W
UGR <19
Frame
CRI90

SYSTEM SYSTEM RASTER
600 | 1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
Up to 3300 lm/m
Up to 150 lm/W
UGR <19
Frame
CRI90

SYSTEM WALL WASHER
600 | 1200 | 2400 mm
3000K | 4000K
Up to 2000 lm/m
Up to 110 lm/W
WW
Frame
CRI90



SYSTEM MAINS VOLTAGE TRACK
1200 | 2400 mm
MV track inside the product

Other versions available

Pendant p. 135 / Linear systems p. 175

System
Opal Screen



System
Raster

System
Office Screen



System
Wall Washer



System
Mains Voltage
Track

Stand-Alone
Opal Screen

3000K | 4000K

CRI90

IP20

GL | UGR <19 | WW

Down | Up & Down emission

Class I

Organic Response (Control + sensor | DALI-2 | DALI-2 sensor | DALI-2 Emergency DALI monitoring 3 h (Self-contained) | Casambi | Casambi sensor

Intelligent Light Solutions

Smart controls:

Organic Response

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes

01
White

V0
Matte black

Visit our website
for more information

iN45 available from
October 2026

IN30 EVO

design iGuzzini



METAL 57 - Boulogne-Billancourt, France — Product: iN30 Evo - Ceiling high contrast | Black
Ph: Didier Boy de la Tour

SYSTEM OPAL

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1700lm/m
up to 102lm/W
GL
Frame | Minimal
CRI80 | CRI90

SYSTEM HIGH CONTRAST

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 2500lm/m
up to 95lm/W
S | F | WF | VWF
Frame | Minimal
CRI90

SYSTEM WALL WASHER

1200 | 2400 mm
2700K | 3000K | 3500K | 4000K
up to 1250lm/m
up to 85lm/W
WW
Frame | Minimal
CRI80 | CRI90

Other versions available

Downlights and recessed luminaries p. 40

Pendant p. 134 / Linear systems p. 174

iN30 EVO
recessed
Opal

iN30 EVO
recessed
High contrast

iN30 EVO
recessed
Wall Washer

iN30 EVO
pendant
Opal



iN30 EVO
pendant
Higt Contrast

iN30 EVO
pendant
Wall washer

3000K | 4000K
CRI80 | CRI90 | CRI95
IP20
2 versions
Class I
DALI-2

Finishes



01
White



04
Black

12
Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Visit our website
for more information

iN30 EVO available from
September 2026

IN30

design iGuzzini



Innoliving Office_Ancona, Italy — Product: iN30 ceiling-mounted low contrast | White
Ph: Studio Buschi

CEILING LOW CONTRAST

1200 | 2400 | 600×600 mm

3000K | 4000K

up to 4081lm

up to 107lm/W

GL

CEILING HIGH CONTRAST

1200 mm (2×5 cells) | 1400 mm (2×10 cells)

3000K | 4000K

up to 3888lm

up to 83lm/W

WF

Other versions available

Downlights and recessed luminaries p. 38

Pendants p. 140

iN30 recessed low contrsat

iN30 recessed high contrast

iN30 pendant low contrast

iN30 pendant high contrast

3000K | 4000K

CRI80 | CRI90 | CRI95

IP20

2 versions

Fixed

Frame

Class I

DALI-2

Finishes

01
White

04
Black

12
Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification


Visit our website for more information

ISIGN

design Jean-Marie Duthilleul



Marsan media library - Marsan, France — Product: iSign - Ø80 mm | Clear transparent
Ph: Didier Boy de la Tour



WALL/CEILING

Ø80 mm

3000K | 4000K

up to 4415lm

up to 124lm/W

Other versions available

Pendants p. 142



3000K | 4000K

CRI80

IP67 | IK08

1630 | 1910 mm

LED

Class II

DALI-2 | ON/OFF Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finish

24
Clear transparent

DESIGN AWARD 2018

Visit our website
for more information

IPLAN ACCESS

design iGuzzini

SQUARE CEILING MOUNTED

600×600 | 625×625 mm

3000K | 3500K | 4000K

up to 3700lm

up to 117lm/W

GL | UGR<19

RECTANGULAR CEILING MOUNTED

1200×300 mm

3000K | 3500K | 4000K

up to 3600lm

up to 111lm/W

GL | UGR<19

Other versions available

Downlights and recessed luminaries p. 45

iPlan Next square ceiling mounted

iPlan Next rectangular ceiling mounted

Pendants p. 164



iPlan Next square pendant



iPlan Next rectangular pendant

3000K | 4000K

CRI80 | CRI90

IP20 | IP40

3 sizes

Class II

DALI-2 | Motion and lux sensor

Down emission

Finishes

12 Aluminium

01 White

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

IPLAN NEXT

design iGuzzini

SQUARE RECESSED
600×600 | 625×625 mm
up to 4700lm
up to 160lm/W
UGR<19

RECTANGULAR RECESSED
1200×300 mm
up to 4700lm
up to 160lm/W
UGR<19

Other versions available

Ceiling luminaires p. 257

iPlan Next square ceiling mounted

iPlan Next rectangular ceiling mounted

Pendants p. 165



iPlan Next square pendant



iPlan Next rectangular pendant

3000K | 4000K
CRI90
IP20 | IP40
3 sizes
Class II
UGR<19
Organic Response (control + sensor)
Casambi | Casambi sensor
DALI-2 | DALI-2 sensor
ON/OFF

Finish

01
White

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor) | Quick BLE (Casambi) | Quick DALI | Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

iPlan Next: ON/OFF, Casambi available from May 2026

LINEALUCE 27

design Jean-Michel Wilmotte



Product: Linealuce 27 - Surface Full Remote | Grey



SURFACE FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

39×69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML |WGS - HC | WGM - HC | WGWF - HC | S | F | WF | E | GL No Dot | WG No Dot

CRI80

Other versions available

Linear Systems p. 186

Recessed in-ground luminaries p. 406

Pendants p. 144

Linealuce 27 surface Full remote



Linealuce 27 pendant Full Remote

Linealuce 27 recessed Full Remote

Linealuce 27 recessed Full Remote



Linealuce 27 surface Full remote

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 | IK06, IK08, IK09

Walkable (1000kg)

Class III

PWM (DALI-2 | Casambi | DMX-RDM | ON/OFF : with external components to be ordered separately)

Mounting accessories to be ordered separately

PEP ECOPASSPORT

Finishes

01 White

15 Grey

04 Black

F5 Rust brown

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

reddot winner 2023 best of the best

Other awards
Grand Prix du Design (Gold) 2024
BrightStar Award 2024

Visit our website for more information

LINEALUCE 47

design Jean-Michel Wilmotte



Mercato Centrale - Milan, Italy — Product: Linealuce 47 - Surface Integral | Grey
Ph: Alessandra Chemollo



SURFACE REMOTE
2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
47×83 mm
340 | 611 | 908 |1205| 1502 mm
up to 5530lm
up to 96lm/W
WGS | WGM | WGWF | S | F | WF
CRI80



SURFACE INTEGRAL
2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
47×83 mm
340 | 611 | 908 | 1205| 1502 mm
up to 5530lm
up to 88lm/W
WGS | WGM | WGWF | S | F | WF
CRI80



SURFACE INTEGRAL SIDE BOX
2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
102×52 mm
340 | 611 | 908 | 1205| 1502 mm
up to 5146lm
up to 86lm/W
WGS | WGM | WGWF
CRI80

Other versions available

Recessed in-ground luminaries p. 404

Recessed ceiling luminareis p. 423

Recessed wall luminaires p. 416



Linealuce 47 Recessed Remote



Linealuce 47 Recessed Integral



Linealuce47 recessed Remote



Linealuce 47 recessed Integral



Linealuce47 recessed Remote



Linealuce 47 recessed Integral

Linear systems p. 186



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White

CRI80

IP66, IP67 | IK05, IK06, IK10

Class II, III

Walkable (2000kg)

DALI-2 | DMX-RDM

Mounting accessories to be purchased separately

Finishes



01 White



15 Grey



04 Black



F5 Rust brown

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification


Visit our website for more information

IPRO

design Mario Cucinella



Arese Shopping Center - Arese, Italy — Product: iPro - 155×155×190 mm | Grey
Ph: Paolo Carlini



51 mm CEILING MOUNTED

3000K | 4000K

up to 348lm

up to 82lm/W

F

CRI80



81 mm CEILING MOUNTED

3000K | 4000K

up to 526lm

up to 68lm/W

F

CRI80



132 mm CEILING MOUNTED

3000K | 4000K

up to 1522lm

up to 109lm/W

WF | VWF

CRI80



155 mm CEILING MOUNTED

3000K | 4000K

up to 2040lm

up to 104lm/W

WF | VWF

CRI80



192 mm CEILING MOUNTED

3000K | 4000K

up to 3304lm

up to 124lm/W

F | WF

CRI80

Other versions available

Floodlights p. 394



iPro

Wall mounted p. 220



iPro ceiling mounted

Pole minimal and connected



MultiPro with minimal and connected pole

Pole mounted multiple flood p. 354



MultiPro on pole



MultiPro with minimal and connected pole



MultiPro wall mounted

3000K | 4000K

CRI80

IP66 | IK07

Class I, II, III

Class III (DALI-2 | Phase-cut | Middle of the Night | ON/OFF: with external power supply to be ordered separately)

ON/OFF | DALI-2 | DMX-RDM

Mounting accessories to be ordered separately

Finishes



01
White



15
Grey



04
Black



F5
Rust brown





Visit our website for more information



TABLE AND FLOOR LAMPS



266 | LIBERA



268 | IPLAN



270 | CLAN



272 | SORELLA



273 | NITIA



274 | POLSINO



275 | CESPUGLIO



276 | PIZZAKOBRA



278 | CLAN MINI



279 | WHISPER

LIBERA

design Artec Studio





SYSTEM - CEILING TO FLOOR

600 | 900 | 1200 | 1800 | 2300 | 2700 mm

up to 5287lm

up to 129lm/W

GL | UGR<19



STAND-ALONE FLOOR

600 | 900 | 1200 | 1800 | 2300 | 2700 mm

up to 3616lm

up to 116lm/W

GL



STAND-ALONE CEILING TO FLOOR

600 | 900 | 1200 | 1800 | 2300 | 2700 mm

2700K | 3000K | 3500K

up to 3586lm

up to 91lm/W

GL

Other versions available

Wall luminaires p. 198





Smart accessories for Libera



Organic Response



Quick BLE (Casambi)



DALI-2

2700K | 3000K | 3500K | 4000K

CRI90

5 lenghts

General Lighting | UGR<19

Space | Microtextured | Smoked

Up & Down | Down emission

Organic Response (control + sensor)

Casambi | Casambi Sensor

DALI-2 | DALI-2 Sensor

IP20

Class I

Body Finishes

01 White

04 Black

N8 Titanium

N9 Sapphire

Optical finishes

R4 White transparent

83 Black transparent

B9 Smoked

P2 Microtextured

Other awards

BrightStar Award 2024

Grand Prix du Design (Gold and Platinum) 2024

Production Innovation Award 2024

Good Design 2024

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Visit our website for more information

IPLAN

design iGuzzini



Heinemann Offices in HafenCity - Hamburg, Germany — Product: iPlan - Floor lamp | GL | Grey
Ph: Paolo Carlini



FLOOR LAMP

682×350×50 mm

3000K | 4000K

up to 13564lm

up to 123lm/W

GL

Other versions available

Wall luminaires p. 213



iPlan wall

Pendants p. 162



iPlan pendant

4000K

CRI80

IP20

Class I

Push Dim

Up & Down emission | Sensor

Finish

12
Aluminium

Intelligent Light Solutions

SMART CONTROLS:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

SMART SERVICES:

Space management |
Push notification

Visit our website
for more information

CLAN

design Harveiluce



Private residence - Arcevia, Italy — Product: Clan - Yellow
Ph: Fabio Di Carlo





TABLE/FLOOR
Ø400 | Ø520 mm
2700K
up to 2452 lm
up to 163 lm/W

FLOOR
Ø400 | Ø520 mm
2700K
up to 2452 lm
up to 163 lm/W

Other versions available

Pendants p. 168



Clan pendant

iGuzziniEchoes

2700K lamp not included
CRI80
IP20
2 sizes
GL
Class II
ON/OFF

Finishes

01 White

02 Orange

06 Yellow

07 Green

Visit our website for more information

SORELLA

design Harveiluce



Ph: Paolo Carlini



TABLE LAMP

224×239×322 mm

2700K

up to 410lm

up to 95lm/W

iGuzziniEchoes

2700K lamp not included

CRI80

IP20

1 size

GL

Class I

ON/OFF

Finishes

01
White

04
Black

Visit our website
for more information

NITIA

design Rodolfo Bonetto



Ph: Paolo Carlini



TABLE LAMP

Ø180×300 mm

2700K

up to 170lm

up to 40lm/W

iGuzziniEchoes

2700K lamp not included

CRI80

IP20

1 size

GL

Class I

ON/OFF

Finishes

01 White

04 Black

05 Red

Visit our website for more information

POLSINO

design Gio Ponti



Ph: DSL Studio





SMALL
130×210×170 mm
2700K
up to 350lm
up to 80lm/W

LARGE
180×250×380 mm
2700K
up to 600lm
up to 102lm/W

iGuzziniEchoes

2700K lamp not included
CRI80
IP20
1 size
GL
Class I
ON/OFF

Finishes

01
White

47
White/Black

H9
White/Orange

Visit our website
for more information

CESPUGLIO

design Ennio Lucini



Ph: Fabio Di Carlo



TABLE LAMP

400×330 mm

2700K

up to 470 lm

up to 109 lm/W

iGuzziniEchoes

2700K lamp not included

CRI80

IP20

1 size

GL

Class I

ON/OFF

Finishes

01 White

04 Black

05 Red

Visit our website for more information

Cespuglio available from April 2026

PIZZAKOBRA

design Ron Arad



Ph: iGuzzini archive



TABLE LAMP

295×285×18 mm

6700K

up to 190lm

up to 21lm/W

6700K

CRI74

IP20

GL

Class I

ON/OFF

Finishes

10
Chrome

reddot winner 2008
best of the best

Visit our website
for more information

CLAN MINI

design iGuzzini



Ph: Luca Rotondo

CLAN MINI

design iGuzzini



Ph: Luca Rotondo



TABLE LAMP

Ø110×312 mm

2200K | 2700K | 3000K

up to 225lm

Dimmable

Down emission

2200K | 2700K | 3000K

CRI80

IP65

1 size

Up & Down | Down emission

Class III

ON/OFF

Finishes

35 Champagne

I6 Matte green

I7 Matte light blue

I8 Matte blue

V1 Matte sand

V2 Black cherry red

Visit our website for more information

WHISPER

design iGuzzini



Ph: Fabio Di Carlo





TABLE LAMP
Ø96×340 mm
2200K | 2700K | 3000K
up to 230lm
Dimmable
Down emission

TABLE LAMP UP & DOWN
Ø96×340 mm
2200K | 2700K | 3000K
up to 185lm
Dimmable
Up & Down emission

2200K | 2700K | 3000K
CRI80
IP65
1 size
Up & Down | Down emission
Class III
ON/OFF

Finishes

- 01 White
- U8 White/Brass
- R1 Champagne/ White
- R2 Vanity red/ White
- 57 Black/Brass
- 04 Black
- 35 Champagne
- Q6 White/ Champagne
- M7 Vanity red
- Q5 White/ Steel
- Q9 Black/ Ceramic black
- Q7 Black/Steel
- Q8 Black/ Champagne

Visit our website for more information


Openness

EMERGENCY LIGHTING



282 | MOTUS



383 | LIGHT SHED 14

284 | LIGHT SHED 60



286 | BLADE R



287 | EASY SPACE



288 | EASY



289 | ISIGN

MOTUS

design iGuzzini









PICTOGRAM
Ceiling/Wall/Flag-mounted
Visibility 26 m
Operating modes SA e SE
Emergency autonomy 3h
Self-test


ESCAPE
Spacing 21 m
Recessed circular version
Surface-mounted square version
Autonomy 3h
Recharge time 12h
Self-test
Operating modes SA e SE
DALI monitoring (recessed versions)

ANTIPANIC
Recessed circular version
Surface-mounted square version
Autonomy 3h
Recharge time 12h
Self-test
Operating modes SA e SE
DALI monitoring (recessed versions)

SUP/INCAS
Opal diffuser
Surface-mounted / Semi-recessed
Autonomy 1-1,5-2-3h
Recharge time 12h
Self-test
DALI monitoring
Operating modes SA e SE

Other versions available

Wall luminaires

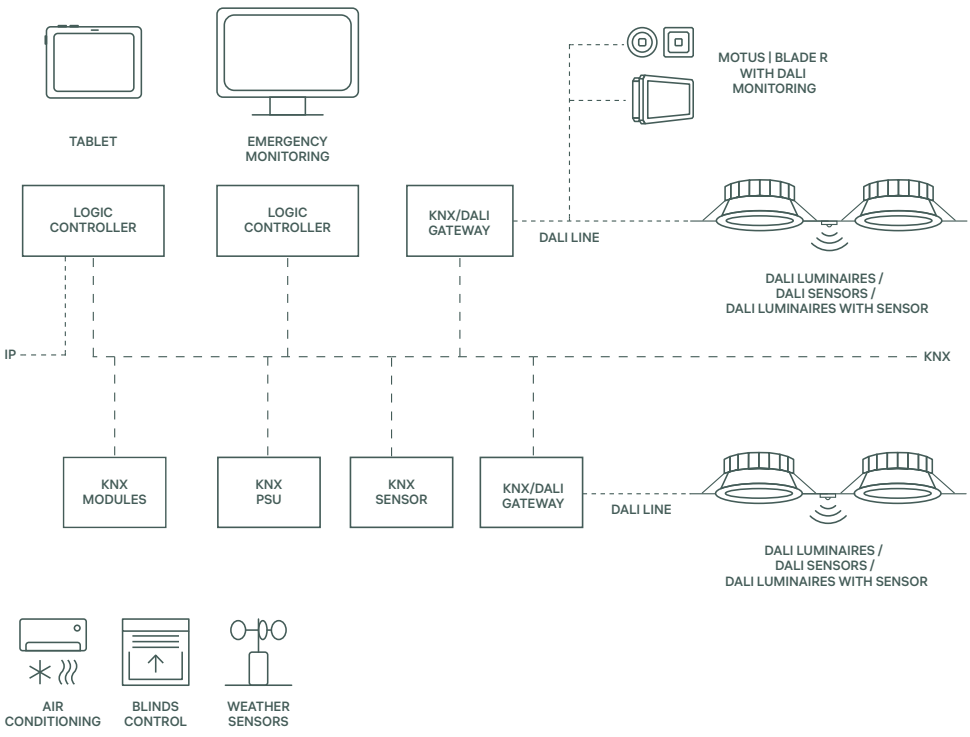

- Emergency luminaires
- Batteries LiFePO4
- Automatic self-test
- Versions with adjustable durations and light outputs
- Recessed, wall, and ceiling installation
- Versions with DALI monitoring

Intelligent Light Solutions

Smart controls:

- Organic Response (control + sensor)
- Quick BLE (Casambi)
- Quick DALI
- Master Pro Evo

Smart services:

- Space management | Push notification

DESIGN AWARD 2004

Other awards:
Innovation Technology Design 2004

Visit our website for more information

LIGHT SHED 14

design iGuzzini



Other versions available

Pendants p.130

Ceiling luminaries p. 247



Light Shed 14
pendant

Light Shed 14
ceiling

PENDANT

5282lm | 139lm/W

1584 | 2772 mm

up to 5282lm

up to 139lm/W

UGR<19

Opti Diamond

Class I

DALI-2

Emergency ON/OFF 3 h autonomy

3000K | 4000K

CRI80 | CRI90

IP20

2 lenghts

Opti Diamond - UGR<19

Class I

DALI-2 | DALI-2 sensor

Body finishes

01
White

04
Black

Optical finishes

D8
White transparent

83
Black transparent

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

LIGHT SHED 60

design iGuzzini





Other versions available

Downlights and recessed luminaries p. 34

Pendants p.132

Light Shed 60 recessed



Light Shed 60 pendant

RECESSED
600×600 mm
3000K | 4000K
up to 3976lm
up to 117lm/W
UGR<19
Emergency 3h autonomy
Emergency ON/OFF 3 h autonomy

PENDANT
600×600 mm
3000K | 4000K
up to 3976lm
up to 117lm/W
UGR<19
Emergency 3h autonomy
Emergency ON/OFF 3 h autonomy

3000K | 4000K
CRI80
IP20 | IP43
1 size
Fixed
MPO (Micro Prismatic Optic)
Class II

Intelligent Light Solutions

Smart controls:

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01 White

15 Grey

07 Green

E8 Gold-satin

S0 Écru

reddot winner 2022 best of the best

DESIGN AWARD 2022

Other awards:
Gold Certificate a "Les Grands Prix du Design" 2022
IES Progress Report 2023

Visit our website for more information



Park Associati Studio - Milan, Italy — Product: Light Shed 60 / Green
Ph: Paolo Carlini

BLADE R

design iGuzzini



EMERGENCY LIGHTING

for Blade R Ø170 mm
5000K
up to 220 lm
Anti-Panic | Escape-Route
Autonomia 3h
Ricarica 12h
Autotest
Funzionamento SA e SE
DALI monitoring

Other versions available

Downlights and recessed luminaries p. 16



Blade R



Blade R + Adjustable light



Blade R + Profiled light



Blade R + Loudspeaker



Blade R + Framer



Blade R + Variable light



Blade R + DALI-2

2700K | 3000K | 3500K | 4000K
CRI80 | CRI90
IP20 | IP42
1 size
Fixed
Frame | Minimal
Class II
DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Space management | Push notification

Finishes

01
White

47
White/Black

Other awards:
Progress Report Selection 2020
Red Dot Design Award (Innovative Products) 2020
Lux Awards 2020
Lighting Design Awards 2020
German Design Award 2022

Visit our website for more information

EASY SPACE

design iGuzzini



GENERAL LIGHTING

Ø153 | Ø212 mm

3000K | 3500K | 4000K

up to 4929lm

up to 120lm/W

Emergency ON/OFF 3 h autonomy



UGR<19

Ø153 | Ø212 mm

3000K | 3500K | 4000K

up to 4515lm

up to 110lm/W

Emergency ON/OFF 3 h autonomy



UGR<19 - MICROFILM

Ø153 | Ø212 mm

3000K | 3500K | 4000K

up to 2581lm

up to 107lm/W

Emergency ON/OFF 3 h autonomy

3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP54

2 sizes

Fixed

Frame

Class II

Body finishes

01
White

04
Black

Optical finishes

D8
White trasparent

83
Black transparent

F8
Black transparent

F6
White transparent

Intelligent Light Solutions

Smart controls:

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Visit our website
for more information

EASY

design iGuzzini



GENERAL LIGHTING
Ø153 | Ø212 mm
3000K | 3500K | 4000K
up to 4664lm
up to 114lm/W
Emergency ON/OFF 3 h autonomy



UGR<19
Ø153 | Ø212 mm
3000K | 3500K | 4000K
up to 4410lm
up to 108lm/W
Emergency ON/OFF 3 h autonomy



UGR<19 - MICROFILM
Ø153 | Ø212 mm
3000K | 3500K | 4000K
up to 2581 lm
up to 107lm/W
Emergency ON/OFF 3 h autonomy



CEILING GENERAL LIGHTING
Ø234 mm
3000K | 4000K
up to 3330lm
up to 106lm/W
Emergency ON/OFF 3 h autonomy



CEILING UGR<19
Ø234 mm
3000K 4000K
up to 3108lm
up to 100lm/W
Emergency ON/OFF 3 h autonomy



PENDANT GENERAL LIGHTING
Ø234 mm
3000K | 4000K
up to 3330lm
up to 106lm/W
Emergency ON/OFF 3 h autonomy



PENDANT UGR<19
Ø234 mm
3000K | 4000K
up to 3108lm
up to 99lm/W
Emergency ON/OFF 3 h autonomy

Other versions available

Downlights and recessed luminaries p. 20

Ceiling luminaires p. 232

Pendants p. 148



General Lighting



UGR<19



UGR<19 Microfilm



Wall Washer



Easy ceiling



Easy ceiling

3000K | 3500K | 4000K
CRI80 | CRI90
IP20 | IP40 | IP54
2 sizes
Fixed
Frame
Class I, II

Intelligent Light Solutions

Smart controls:
Quick DALI
Master Pro Evo

Smart services:
Space management |
Push notification

Optical finishes

01 White
12 Aluminium
39 White/Aluminium

Body finishes


01 White
04 Black

Visit our website for more information

ISIGN

design Jean-Marie Duthilleul





Other versions available

Wall luminaires p. 214

Pendants p. 142





PENDANTS
Ø80 mm
3000K | 4000K
up to 4415lm
up to 121lm/W
Emergency ON/OFF 3h autonomy

WALL/CEILING
Ø80 mm
3000K | 4000K
up to 4415lm
up to 121lm/W
Emergency ON/OFF 3h autonomy

3000K | 4000K
CRI80
IP67 | IK08
1630 mm | 1910 mm
GL
LED
Class II

Finish

24
Clear transparent

Intelligent Light Solutions

Smart controls:


Quick DALI

Master Pro Evo


Smart services:

Space management |
Push notification

Visit our website
for more information

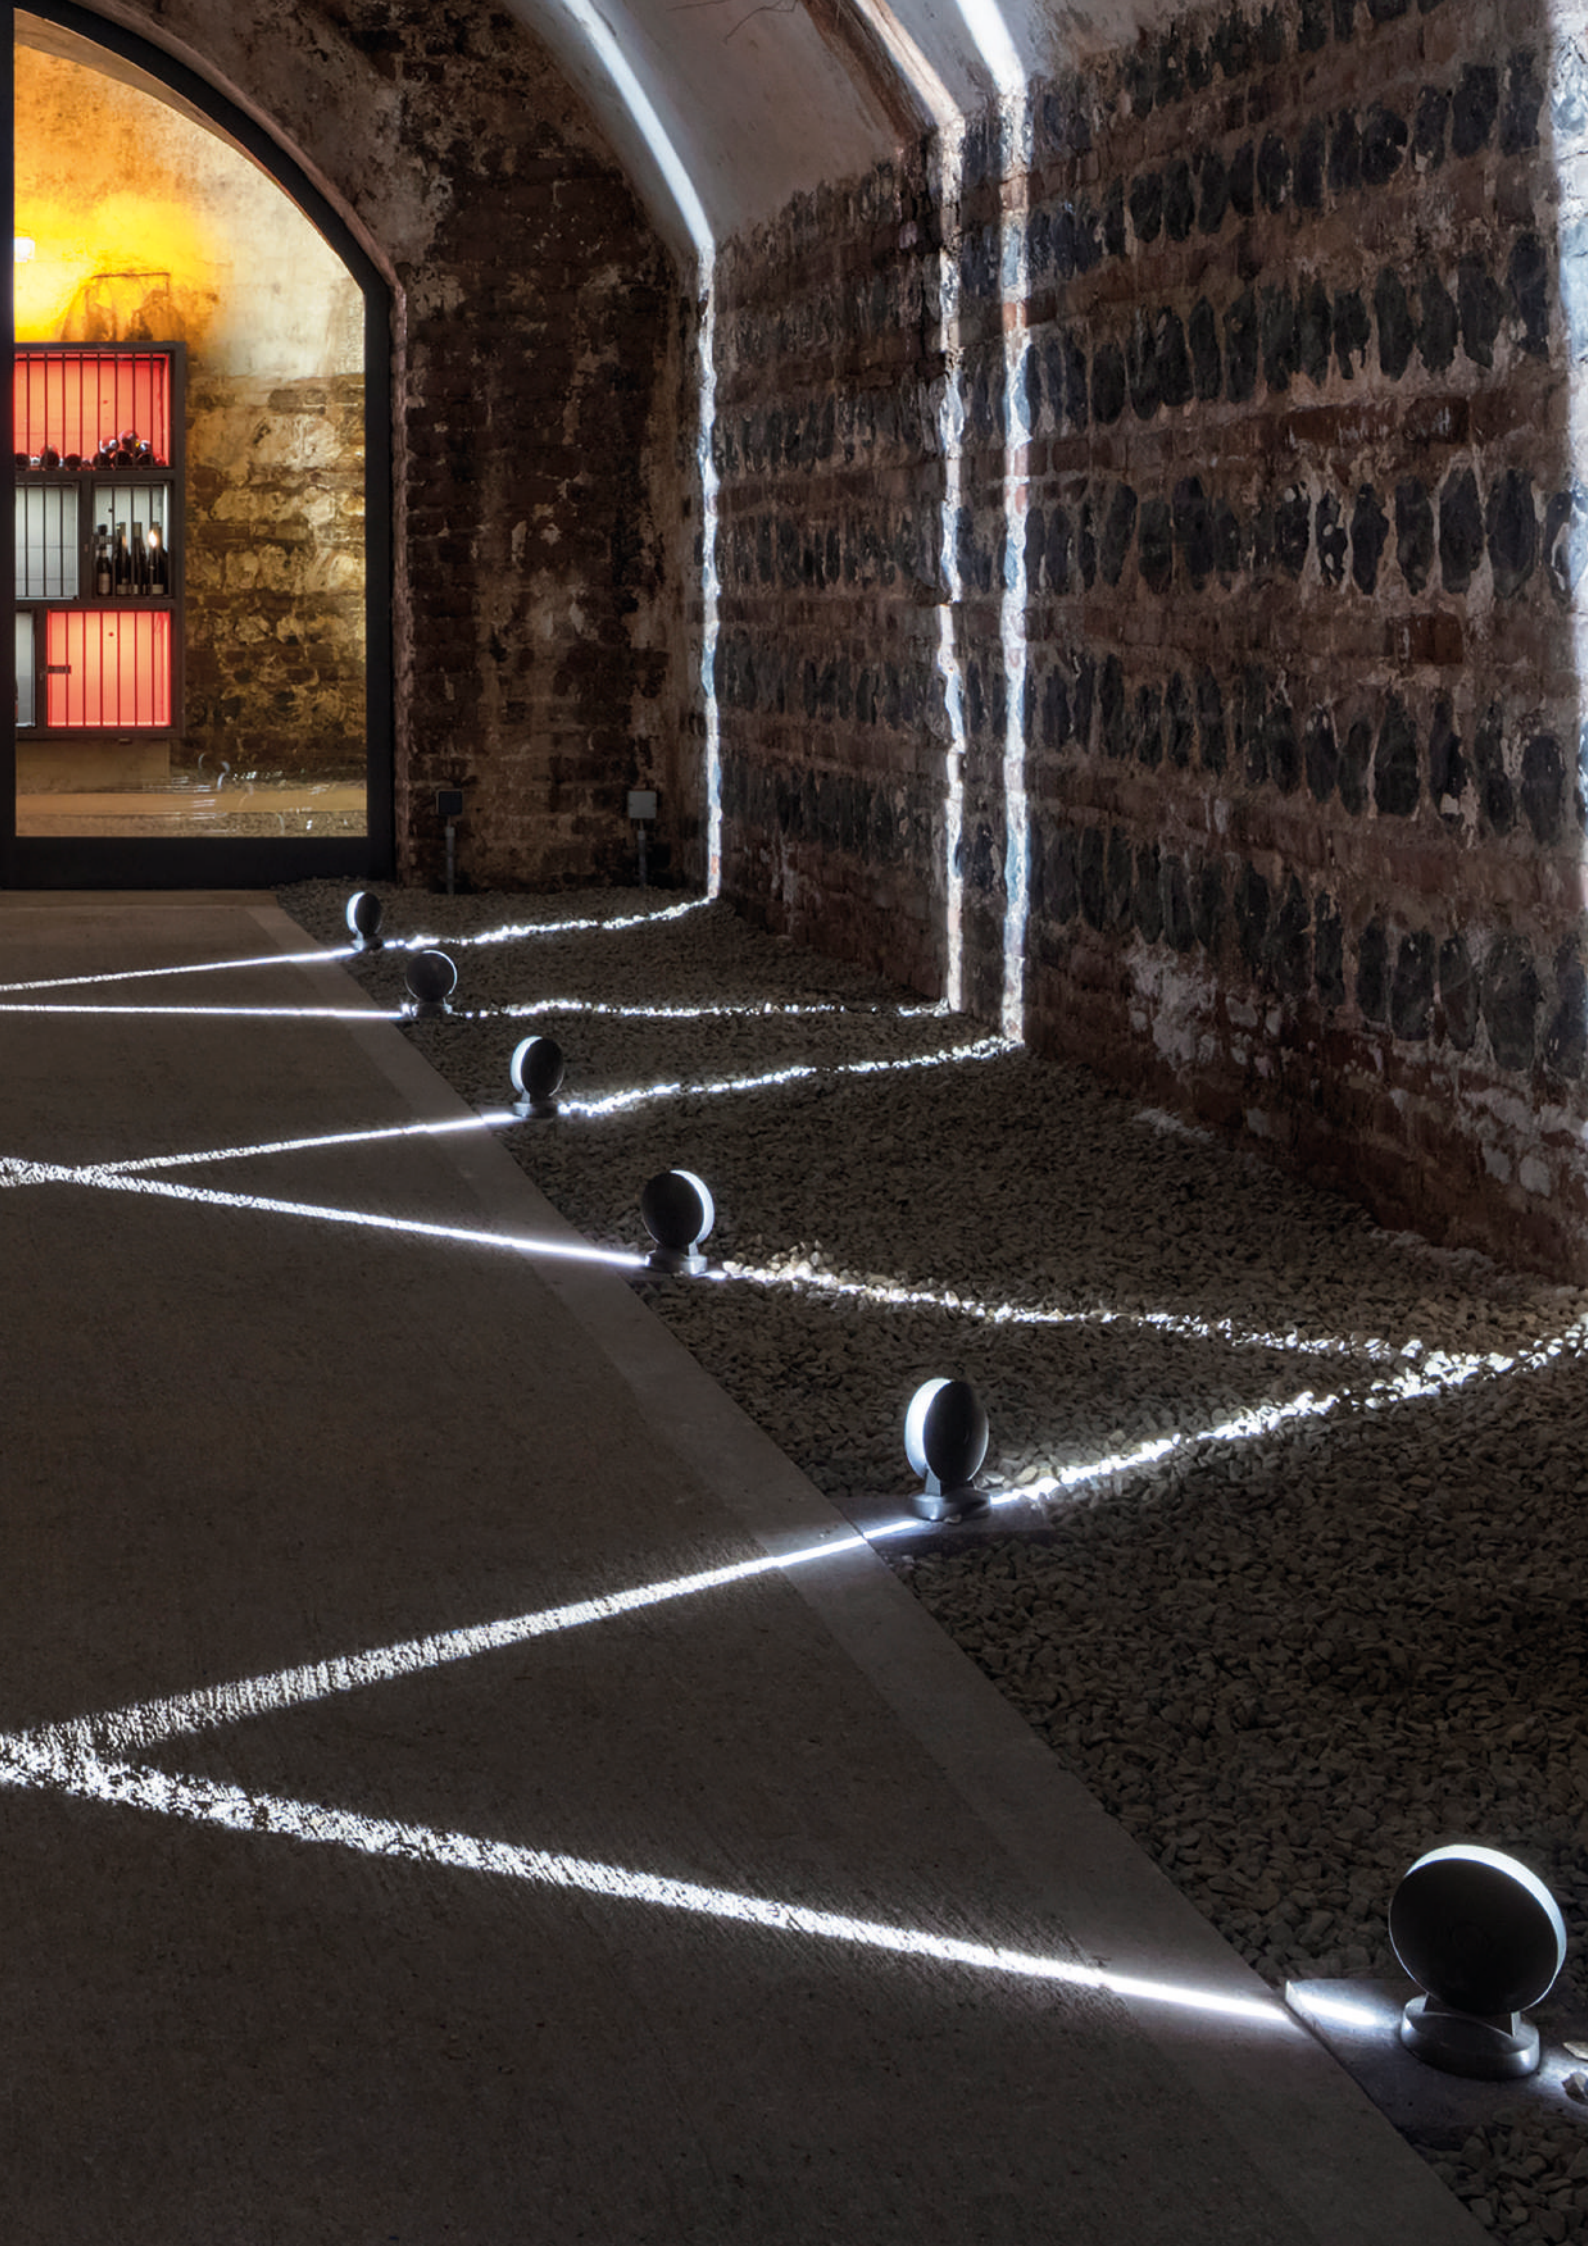

LIGHTING EFFECT LUMINAIRES



292 | UNDERSCORE LEDSTRIP



294 | UNDERSCORE



296 | UNDERSCORE INOUT



298 | TRICK



300 | IPRO



302 | LIGHT UP ORBIT



304 | ALLURE

UNDERSCORE LEDSTRIP

design iGuzzini



Holy Deer San Lorenzo Lodge - Rome, Italy — Product: Underscore Ledstrip
Ph: Giovanni De Sandre




LEDSTRIP HIGH PERFORMANCE
5 mt
2700K | 3000K | 3500K | 4000K
up to 14075lm
up to 152lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 50 mm



LEDSTRIP TUBE HIGH PERFORMANCE
5 mt
2700K | 3000K | 3500K | 4000K
up to 12975lm
up to 141lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 50 mm




COB
5 mt
2700K | 3000K | 4000K | RGBW | Tunable White
up to XXlm
up to 105lm/W
24V
| XXW/m | XXW/m | XXW/m
Free-cut 50 mm




LEDSTRIP 12/24V
5 mt
3000K | 4000K | RGBW
up to 10500lm
up to 140lm/W
24V
15W/m | 20W/m
Free-cut 100 mm



LEDSTRIP TUBE NO-DOT 24V
5 mt
2700K | 3000K | 3500K | 4000K
up to 10475lm
up to 100lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 26 mm



LEDSTRIP TUBE 12/24V
5 mt
2700K | 3000K | 4000K | RGB
up to 10000lm
up to 104lm/W
12V | 24V
14W/m | 19W/m
Free-cut 125 mm



LEDSTRIP TUBE SIDE 12V
5 mt
2700K | 3000K | 4000K | RGB
up to 2650lm
up to 110lm/W
12V
5W/m
Free-cut 50 mm

2200 | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White
CRI90
IP20
1 lenght
General Lighting
Class III (DALI-2 | DMX-RDM | Casambi | ON/OFF : with external components to be ordered separately)
Power supply to be ordered separately
12V | 24V
ON/OFF
Casambi
DALI-2

Intelligent Light Solutions
Smart controls:
Organic Response (control + sensor)
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX
Smart services:
Space management | Push notification

Finish

01
White

Visit our website for more information

Underscore CoB available from May 2026

UNDERSCORE

design iGuzzini



Fernand Cina winery - Salgesch, Switzerland — Product: Underscore
Ph: Roland Halbe



15 RECESSED

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Ledstrip 24V
- Frame recessed low linear profile
- Frame recessed high linear profile
- Minimal recessed high linear profile
- Opal diffuser screen
- Traslucid diffuser screen



15 SURFACE-MOUNTED

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Ledstrip 24V
- Surface low linear profile
- Surface high linear profile
- Opal diffuser screen




15 CORNER

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Ledstrip 24V
- Angular profile
- Opal diffuser screen
- Translucid diffuser screen



15 PERIMETRAL

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Ledstrip 24V
- Perimetral Profile
- Opal diffuser screen
- Translucid diffuser screen



18 PERIMETRAL

Ledstrip 12V - RGB

Ledstrip 24V - RGBW | Tunable White

Miminal recessed high linear profile

Opal diffuser screen

Traslucid diffuser screen



18 SURFACE

Ledstrip 12V - RGB

Ledstrip 24V - RGBW | Tunable White

Surface high linear profile

Opal diffuser screen

Traslucid diffuser screen



18 PERIMETRAL

Ledstrip 12V - RGB

Ledstrip 24V - RGBW | Tunable White

Perimetral profile

Opal diffuser screen

Traslucid diffuser screen

Aluminium profiles compatible with Underscore Ledstrip

Visit our website for more information

UNDERSCORE INOUT

design iGuzzini



Doha Metro - Doha, Qatar — Product: Underscore InOut
Ph: Nigel Downes



SIDE BEND 10 mm

2600K | 2900K | 3700K | 4600K | RGB

L from 254 mm to 7004 mm

up to 3448lm

up to 73lm/W

GL

CRI80



SIDE BEND 16 mm

2600K | 2900K | 3700K | 4600K | RGB | Tunable white

L from 254 mm to 7004 mm

up to 3690lm

up to 78lm/W

GL

CRI80



TOP BEND 16 mm

2600K | 2900K | 3800K | 4600K | RGB | Tunable white


L from 254 mm to 7004 mm

up to 5601lm

up to 74lm/W

GL

CRI80



PIXEL TOP BEND 16 mm

RGBW

L from 337 mm to 7004 mm

up to 1281lm

up to 25lm/W

GL (addressable every 83 mm)

Other versions available

Linear systems p. 192




Underscore InOut Side Bend 10 mm



Underscore InOut Side Bend 16 mm



Underscore InOut Top Bend 16 mm



Underscore InOut Top Bend 16 mm

2600K | 2900K | 3700K | 3800K | 4600K | RGB | Tunable White | RGBW

CRI80

IP68 | IK10

Class III (DALI-2 | DMX-RDM | Casambi | SPI | ON/OFF : with external components to be ordered separately)

PWM | SPI

Power supply to be ordered separately

Finish

01
White

ArchiExpo i-NOVO Awards 2016

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Space management | Push notification

Visit our website for more information

TRICK

design Dean Skira



Songyuan House - Ancient City of Zhujiajiao, China — Product: Trick — Radial | Grey
Ph: Wang Zilu







EM	
3000K	Base with longitudinal and transverse adjustment for the installation Ø108×54 mm
Ø110×166 mm	Base plate with longitudinal adjustment Ø108×45 mm installation
up to 66lm	Plate with longitudinal adjustment for the installation in an indoor environment Ø116×25 mm
up to 5lm/W	
360° Blade optic (divided in ten sectors that can be controlled separately)	
Through wiring	
CRI80	

360° AND LIGHT BLADE EFFECT
3000K | RGB
Ø89×140 | Ø124×164 mm
up to 180lm
up to 19lm/W
360° Blade optic | L/L
Outgoing cable
CRI80

RADIAL
3000K
Ø110×42 | Ø110×75 | Ø160×85 mm
up to 528lm
up to 38lm/W
R360°
Outgoing cable
CRI80





180°
3000K
Ø89×57 | Ø110×89 mm
up to 150lm
up to 33lm/W
L180°
Outgoing cable
CRI80

WASHER
3000K
Ø89×57 | Ø110×89 mm
up to 191lm
up to 49lm/W
W
Outgoing cable
CRI80

Other versions available

Ceiling mounted luminaires p. 466

Wall mounted p. 448



Trick em



Trick 360° and light blade effect



Trick radial



Trick em



Trick 360° and light blade effect



Trick radial



Trick 180°



Trick washer



Trick 180°



Trick washer

3000K | RGB
CRI80
IP20, IP66 | IK07
Class II, Class III (DALI-2 | DMX-RDM | ON/OFF : with external components to be ordered separately)
Mounting accessories to be purchased separately
Power supply to be purchased separately

Intelligent Light Solutions

Smart controls:

- Organic Response (control + sensor)
- Quick BLE (Casambi)
- Quick DALI
- Master Pro Evo
- Quick DMX
- Master Pro DMX

Smart services:

- Space management | Push notification

Body Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- E4 White/Chrome
- E5 White/Grey

Other colours on request

reddot winner 2015 best of the best

reddot winner 2025 best of the best

Other awards:
Compasso d'Oro Menzione d'Onore 2016
Win World Interiors Awards 2014
Premis Delta ORO 2014
Lux Awards 2014
Lighting Design Award 2015
Light Middle East Award: Outdoor Lighting Product of the Year 2025
Grand Prix du Design 2025

Visit our website for more information

IPRO

design Mario Cucinella



Private residence in Neuilly-sur-Seine - France — Product: iPro - 51 mm | Wall-mounted | Up & Down light | Grey
Ph: Didier Boy de la Tour



WALL MOUNTED

51×51×56 | 51×51×161 | 81×81×86 mm

3000K | 4000K

up to 221lm

up to 49lm/W

L | L/L | L/VWF | VWF/VWF

CRI80

Other versions available

Floodlights p. 394



iPro

Wall mounted luminaires p. 220



iPro wall mounted

Pole mounted multiple flood p. 352



MultiPro on pole



MultiPro with minimal and connected pole



MultiPro wall mounted

Ceiling mounted p. 262



iPro Ceiling mounted

Pole minimal and connected



MultiPro wall mounted

3000K | 4000K

CRI80

IP66 | IK07

Class || ON/OFF

Class III (DALI-2 | Phase-cut | ON/OFF : with external power supply to be ordered separately)

Mounting accessories to be ordered separately

Finishes



01 White



04 Black



15 Grey



F5 Rust brown

reddot winner 2010
best of the best

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Space management | Push notification

Visit our website for more information

LIGHT UP ORBIT

design iGuzzini



Canva - Sydney, Australia — Product: Light Up Orbit
Ph: Rohan Venn



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L

CRI80



BODY IN STAINLESS STEEL FLUSH MOUNTED

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L | E

CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH MOUNTED

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | L | E

CRI80

Other versions available

In-ground luminaries p. 404 / Recessed downlights p. 426 / Recessed wall luminaires p. 416

Light Up Orbit Body in stainless steel

Light Up Orbit Body in stainless steel flush mounted

Light Up Orbit Body in stainless steel / all glass flush mounted



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush mounted



Light Up Orbit Body in stainless steel / all glass flush mounted



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush mounted



Light Up Orbit Body in stainless steel / all glass flush mounted

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III (DALI-2 | ON/OFF : with external power supply to be ordered separately)

Resistance to static load (2000kg)

Remote power supply to be ordered separately

Mounting accessories to be o rdered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body Finishes

12
Steel

Body Finishes all glass flush mounted

04
Black

12
Steel

Body Finishes flush mounted

12
Steel

14
Gold

69
Bronze

E6
Burnished chrome

Visit our website for more information

ALLURE

design iGuzzini



Private residence - Arcevia, Italy — Product: Allure Graphic - Rust brown
Ph: Fabio Di Carlo



GRAPHIC 120×150 mm

2700K | 3000K | 3500K | 4000K

up to 425lm

up to 42lm/W

L up | L down | ADJ Beam Up | ADJ Beam Down | L/ADJ Beam | ADJ Beam / L | L/L | ADJ Beam / ADJ Beam

CRI80

Other versions available

Lighting effect luminaires p. 480



Allure Wall
120×150 mm



Allure Wall
120×250 mm



Allure Wall
Graphic
120×150 mm



Allure Wall
Smart
120×150 mm



Allure Wall
Smart
120×250 mm

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06

Class I

ON/OFF

Lower raster to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick DALI

Master Pro Evo

Raster finishes

- 01 White
- 04 Black
- 07 Green
- 15 Grey
- F5 Rust brown
- F7 Shiny copper
- H3 Shiny black
- M3 Shiny sand
- M4 Shiny lead
- M5 Polished urban bronze
- I9 Satin transparent

Body Finishes

- 01 White
- 04 Black
- 07 Green
- 15 Grey
- F5 Rust brown

Other awards
Grand Prix du Design 2024
Good Design 2024

Visit our website
for more information

POLE AND WALL MOUNTED SYSTEMS

308 | ALBERO


310 | LANDER


312 | UFO


314 | PLATEA PRO


316 | LAVINIA


318 | WOW


320 | TWILIGHT COPENHAGEN


322 | TWILIGHT KYOTO


323 | TWILIGHT CORTINA


324 | TWILIGHT CALGARY


326 | TWILIGHT JOBURG


328 | TWILIGHT BILBAO


330 | TWILIGHT CANBERRA


331 | TWILIGHT PARIS


332 | TWILIGHT ODENSE


334 | FIAMMA


336 | LA VENARIA


338 | STREET


340 | BILLBOARD

ALBERO

design Enzo Eusebi



Historical Centre - Spello, Italy — Product: Albero - H=5500 mm | Symmetric optic | White
Ph: Luca Petrucci



ALBERO

3000K | 4000K

Ø3280×5347 mm

up to 2725lm

up to 22lm/W

SM

CRI80

3000K | 4000K

CRI80

IP65 | IK08

Class I

ON/OFF

Finishes

01
White

04
Black

15
Grey

F5
Rust brown

Visit our website
for more information

LANDER

design Piano Design





POLE MOUNTED

h=2,5 m

2200K | 2700K | 3000K | 4000K

272×126 mm

up to 2000lm

up to 120lm/W

A60 | SC | ST1.5 | STCy0.5



POLE MOUNTED

h=4 m

2200K | 2700K | 3000K | 4000K

351×126 mm

up to 4000lm

up to 120lm/W

A60 | STCy0.5 | ST1.5 | ST1U | SY1.5U | STWt1 | STWt1.5 | SC

Other versions available

Wall mounted luminaires p. 456

Bollards p. 432









2200K | 2700K | 3000K | 4000K

CRI80

IP66 | IK09

Class II, III

Zhaga (up or down)

Casambi

Midnight preset/DALI

DALI -2

Mounting accessories to be ordered separately

Power supply to be ordered separately

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

07 Green

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Quick BLE (Casambi)

Smart services:

Jiminy - Push Notification

reddot winner 2017
best of the best

Other awards:
German Design Award 2019

Visit our website for more information

UFO

design Piano Design



Paseo and Pereda Gardens - Santander, Spain — Product: UFO Comfort pole mounted 423×423 mm | Grey/White
Ph: Gala Martinez Lopez



POLE TOP 423×423 mm

2200K | 3000K | 4000K | 5700K

up to 7000lm

up to 151lm/W

A60 | PS | ST1.0 | ST1.2 | ST1.5U | ST1U | STCy0.5 | STZI | STZr

CRI70



COMFORT POLE TOP 423×423 mm

3000K | 4000K

up to 2980lm

up to 93lm/W

SC

CRI80



COMFORT POLE TOP 634×634 mm

3000K | 4000K

up to 5380lm

up to 108lm/W

SC

CRI80



WALL MOUNTED 423×423 mm

2200K | 3000K | 4000K | 5700K

up to 7000lm

up to 151lm/W

A60 | PS | ST1.0 | ST1.2 | ST1.5U | ST1U | STCy0.5 | STZI | STZr

CRI70



COMFORT WALL MOUNTED 423×423 mm


3000K | 4000K

up to 2980lm

up to 93lm/W

SC

CRI80

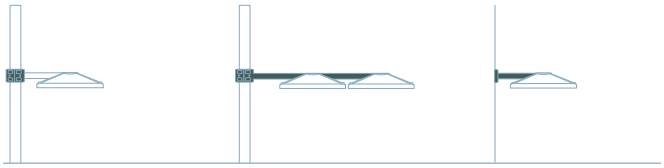

Horizontal arm forinstallation of 1 assembly

Horizontal arm for installation of 2 assemblies

Wall attachment

2200K | 3000K | 4000K | 5700K

CRI70 | CRI80

IP66 | IK07, IK08

Class II

DALI-2 | Midnight preset/DALI NFC

Mounting accessories to be ordered separately

Finishes

11 White/white

B5 Grey/White

F2 Black/White

G3 Rust brown/White

Visit our website for more information

PLATEA PRO

design Jean-Michel Wilmotte



Palazzo Te park - Mantua, Italy — Product: Platea Pro - pole mounted 296×214 mm | Simple arm L=500 mm | Grey
Ph: Paolo Carlini



POLE TOP 296×214 mm

2200K | 2700K | 3000K | 4000K | Tunable Warm

up to 4410lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80



POLE TOP 406×276 mm

2200K | 2700K | 3000K | 4000K | Tunable Warm

up to 12180lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80



WALL MOUNTED 296×214 mm

2200K | 2700K | 3000K | 4000K | Tunable Warm

up to 4410lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80



WALL MOUNTED 406×276 mm

2200K | 2700K | 3000K | 4000K | Tunable Warm

up to 12180lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80

Other versions available


Floodlights p. 390


Pole and wall mounted multiple floodlights p. 352











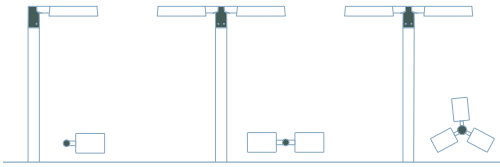


Pole top installation on cylindrical poles




Installation with arms on cylindrical poles




Angled with tie-rod



Intermediate fitting



Lateral coupling



Wall attachment

2200K | 2700K | 3000K | 4000K | Tunable White

CRI70 | CRI80

IP66 | IK08

Class II

DALI-2

Zhaga

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Finishes



01
White



04
Black



15
Grey



F5
Rust brown

Visit our website for more information

Platea Pro: pole versions new optics available from November 2026

LAVINIA

design Massimiliano and Doriana Fuksas



Salasplils street - Salaspils, Latvia — Product: Lavinia - Pole mounted 617×333 mm | Arm 900 mm single | Black
Ph: Andrius Laucius





POLE TOP 617×333 mm

2200K | 2700K | 3000K | 4000K

up to 12000lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80

WALL MOUNTED 617×333 mm


2200K | 2700K | 3000K | 4000K | Tunable Warm

up to 12610lm


up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80

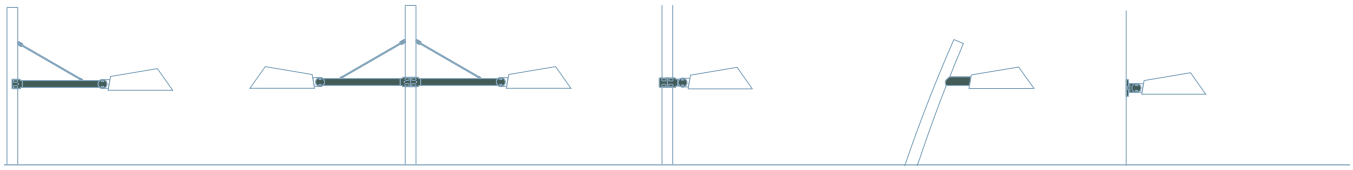

Single | Double | Intermediate fitting | Lateral coupling | Wall attachment

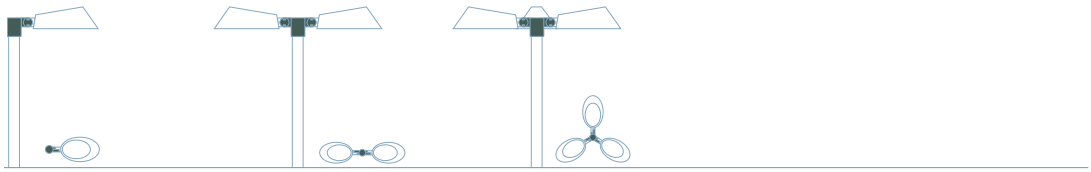

Single | Double | Triple

2200K | 2700K | 3000K | 4000K

CRI70 | CRI80

IP66 | IK09

Class II

DALI-2

Zhaga

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

H1 Deep grey

Other awards
Innovation Techonology Design 2005

Visit our website for more information

Lavinia: pole versions new optics available from November 2026

WOW

design Piano Design



Pontresina, Swiss — Product: Wow - Pole Top 758×415mm | Grey
Ph: Paolo Carlini



POLE TOP 620×307 mm
3000K | 4000K
up to 10830lm
up to 130lm/W
A45 | A60 | ST0.8C | ST1.0 | ST1.2 | ST1C
CRI70



POLE TOP 758×415 mm
3000K | 4000K
up to 20980lm
up to 129lm/W
A45 | A60 | ST1.0 | ST1.2 | ST1C
CRI70



POLE TOP 807×505 mm
3000K | 4000K
up to 26940lm
up to 126lm/W
A45 | A60 | ST1.0 | ST1.2
CRI70




WALL MOUNTED 620×307 mm
3000K | 4000K
up to 10830lm
up to 130lm/W
A45 | A60 | ST0.8C | ST1.0 | ST1.2 | ST1C
CRI70






WALL MOUNTED 758×415 mm
3000K | 4000K
up to 20980lm
up to 129lm/W
A45 | A60 | ST1.0 | ST1.2 | ST1C
CRI70

WALL MOUNTED 807×505 mm
3000K | 4000K
up to 26940lm
up to 126lm/W
A45 | A60 | ST1.0 | ST1.2
CRI70

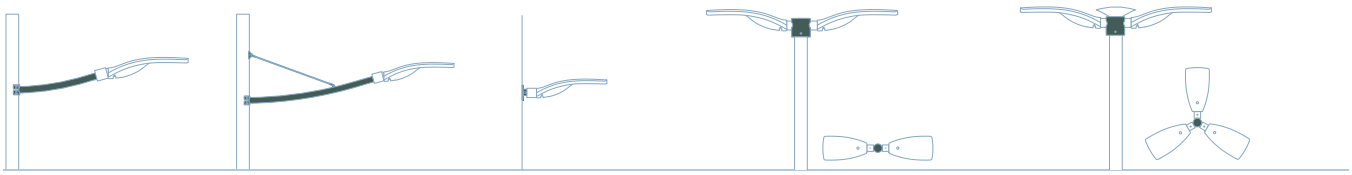

Single | With tie-rod | Wall attachment | Double | Triple

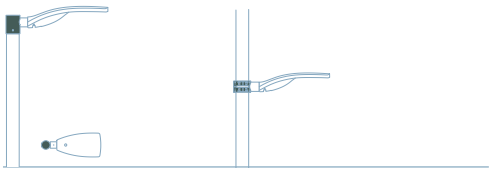

Single | Wall attachment

3000K | 4000K
CRI70
IP67 | IK08
Class II
DALI-2
Mounting accessories to be ordered separately

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

Visit our website for more information

TWILIGHT COPENHAGEN

design iGuzzini



Park Sybiraków and Square of Pioneers - Kolobrzeg, Poland — Product: Twilight Copenhagen - Pole Top | Grey
Ph: Anna Rejmer



POLE TOP

2200K | 3000K | 4000K | 5700K

Ø460×76 mm

up to 14760lm

up to 146lm/W

STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5 | ST1.5U | STWt1 | STWt1.5 | STZr | STZl | A60 | PS | SMC | E

CRI70



WALL MOUNTED

2200K | 3000K | 4000K

Ø460×76 mm × L=500 mm

up to 5730lm

up to 141lm/W

STCy0.5 | ST1.5 | A60

CRI70



SPAN WIRE

2200K | 3000K | 4000K

Ø460×76 mm

up to 11010lm

up to 159lm/W

STWrs | STWrw

CRI70

2200K | 3000K | 4000K | 5700K

CRI70

IP66 | IK08

Class II

Midnight preset/DALI NFC | Midnight preset/Zhaga

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

H1 Deep grey

Visit our website for more information

TWILIGHT KYOTO

design iGuzzini







POLE TOP	WALL MOUNTED	SPAN WIRE
2200K | 3000K | 4000K | 5700K	2200K | 3000K | 4000K	2200K | 3000K | 4000K
Ø470×76 mm	Ø470×76 mm × L=500 mm	Ø470×76 mm
up to 14760lm	up to 5730lm	up to 11010lm
up to 146lm/W	up to 141lm/W	up to 159lm/W
STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5 | ST1.5U | STWt1 | STWt1.5 | STZr | STZl | A60 | PS | SMC | E	STCy0.5 | ST1.5 | A60	STWrs | STWrw
CRI70	CRI70	CRI70

2200K | 3000K | 4000K | 5700K

CRI70

IP66 | IK08

Class II

Midnight preset/DALI NFC | Midnight preset/Zhaga

Mounting accessories to be ordered separately

Diffuser to be ordered separately (Ø583 mm)

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Body finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- H1 Deep grey

Diffuser finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- H1 Deep grey

Visit our website for more information

TWILIGHT CORTINA

design iGuzzini



POLE TOP

2200K | 3000K | 4000K | 5700K

Ø470×16 mm

up to 14760lm

up to 146lm/W

STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5 | ST1.5U | STWt1 | STWt1.5 | STZr | STZI | A60 | PS | SMC | E

CRI70



WALL MOUNTED

2200K | 3000K | 4000K

Ø470×76 mm × L=500 mm

up to 5730lm

up to 141lm/W

STCy0.5 | ST1.5 | A60

CRI70



SPAN WIRE

2200K | 3000K | 4000K

Ø470×76 mm

up to 11010lm

up to 159lm/W

STWrs | STWrw

CRI70



PMMA POLE TOP

2200K | 3000K | 4000K | 5700K

Ø470×76 mm

up to 14760lm

up to 146lm/W

STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5 | ST1.5U | STWt1 | STWt1.5 | STZr | STZI | A60 | PS | SMC | E

CRI70



PMMA WALL MOUNTED

2200K | 3000K | 4000K

Ø470×76 mm × L=500 mm

up to 5730lm

up to 141lm/W

STCy0.5 | ST1.5 | A60

CRI70



PMMA SPAN WIRE

2200K | 3000K | 4000K

Ø470×76 mm

up to 11010lm

up to 159lm/W

STWrs | STWrw

CRI70

2200K | 3000K | 4000K | 5700K

CRI70

IP66 | IK08

Class II

Midnight preset/DALI NFC | Midnight preset/Zhaga

Mounting accessories to be ordered separately

Diffuser to be ordered separately (Ø515 mm)

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Body finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- H1 Deep grey

Diffuser finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- H1 Deep grey

Diffuser PMMA Finishes

- P1 Opal
- 83 Trasparent black
- I9 Satin trasparent
- L1 Brown trasparent

Visit our website for more information

TWILIGHT CALGARY

design iGuzzini



Public lighting relamping in Rende, Italy — Product: Twilight Calgary - Pole Top | Rust brown
Ph: Stefano Ferrando, Studio Vetroblu







POLE TOP
2200K | 3000K | 4000K | 5700K
Ø470×76 mm
up to 14760lm
up to 146lm/W
STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5 | ST1.5U | STWt1 | STWt1.5 | STZr | STZl | A60 | PS | SMC | E
CRI70

WALL MOUNTED
2200K | 3000K | 4000K
Ø470×76 mm × L=500 mm
up to 5730lm
up to 141lm/W
STCy0.5 | ST1.5 | A60
CRI70

SPAN WIRE
2200K | 3000K | 4000K
Ø470×76 mm
up to 11010lm
up to 159lm/W
STWrs | STWrw
CRI70

2200K | 3000K | 4000K | 5700K
CRI70
IP66 | IK08
Class II
Midnight preset/DALI NFC | Midnight preset/Zhaga
Mounting accessories to be ordered separately
Diffuser to be ordered separately (Ø583 mm)

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Body finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- H1 Deep grey

Diffuser finishes

- L2 White/Opal white
- L3 White/Satin transparent
- L4 Grey/Transparent black
- L5 Grey/Satin transparent
- L6 Deep grey/Transparent black
- L7 Deep grey/Satin transparent
- L8 Black/Transparent black
- L9 Black/Satin transparent
- M1 Rust brown/Transparent brown
- M2 Rust brown/Satin transparent

Visit our website for more information

TWILIGHT JOBURG

design iGuzzini



D3 Creek Park - Dubai, UAE — Product: Twilight Joburg - Pole Top | Black
Ph: Oliver Jackson





POLE TOP
2200K | 3000K | 4000K
Ø323×190 mm
up to 4590lm
up to 102lm/W
E | SM | ST0.5 | ST1.2
CRI65 | CRI80

WALL MOUNTED
3000K | 4000K
Ø323×190 mm × L=561 mm
up to 3920lm
up to 78lm/W
ST1.2
CRI70

2200K | 3000K | 4000K
CRI65 | CRI70 | CRI80
IP66 | IK10
Class II
Middle of the night
DALI | DALI-2
NEMA
Mounting accessories to be ordered separately

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

ADI DESIGN INDEX
Selezione Compasso d'Oro

Intelligent Light Solutions
Smart controls:
Zhaga Socket

Visit our website for more information

TWILIGHT BILBAO

design iGuzzini



LUISS school building - Rome, Italy — Product: Twilight Bilbao - Pole Top | Grey
Ph: Michele Nastasi



POLE TOP

2200K | 3000K | 4000K
Ø323×190 mm
up to 4590lm
up to 102lm/W
E | SM | ST0.5 | ST1.2
CRI65 | CRI80



PMMA POLE TOP

2200K | 3000K | 4000K
Ø323×190 mm
up to 3920lm
up to 78lm/W
ST1.2
CRI65 | CRI80



WALL MOUNTED

3000K | 4000K
Ø323×190 mm × L=561 mm
up to 4590lm
up to 102lm/W
E | SM | ST0.5 | ST1.2
CRI70



PMMA WALL MOUNTED

3000K | 4000K
Ø323×190 mm × L=561 mm
up to 3920lm
up to 78lm/W
ST1.2
CRI70

2200K | 3000K | 4000K
CRI65 | CRI70 | CRI80
IP66 | IK10
Class II
Middle of the night
DALI | DALI-2
NEMA
Mounting accessories to be ordered separately
Diffuser to be ordered separately (Ø500 mm)

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

Diffuser finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- P1 Opal

ADI DESIGN INDEX
Selezione Compasso d'Oro

Visit our website for more information

TWILIGHT CANBERRA

design iGuzzini





POLE TOP
2200K | 3000K | 4000K
Ø323×190 mm
up to 4590lm
up to 102lm/W
E | SM | ST0.5 | ST1.2
CRI65 | CRI80

WALL MOUNTED
3000K | 4000K
Ø323×190 mm × L=561 mm
up to 3920lm
up to 78lm/W
ST1.2
CRI70

2200K | 3000K | 4000K
CRI65 | CRI70 | CRI80
IP66 | IK10
Class II
Middle of the night | DALI | DALI-2 | NEMA
Mounting accessories to be ordered separately
Diffuser to be ordered separately (Ø650 mm)

Body finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

Diffuser finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

ADI DESIGN INDEX
Selezione Compasso d'Oro

Intelligent Light Solutions
Smart controls:
Zhaga Socket

Visit our website for more information

TWILIGHT PARIS

design iGuzzini





POLE TOP
2200K | 3000K | 4000K
Ø323×190 mm
up to 4590lm
up to 102lm/W
E | SM | ST0.5 | ST1.2
CRI65 | CRI80

WALL MOUNTED
3000K | 4000K
Ø323×190 mm × L=561 mm
up to 3920lm
up to 78lm/W
ST1.2
CRI70

2200K | 3000K | 4000K
CRI65 | CRI70 | CRI80
IP66 | IK10
Class II
Middle of the night
DALI | DALI-2
NEMA
Mounting accessories to be ordered separately
Diffuser to be ordered separately (Ø498 mm)

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Body finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

Diffuser Finish

- 14 Gold

Visit our website for more information

TWILIGHT ODENSE

design iGuzzini



Park Sybiraków and Square of Pioneers - Kolobrzeg, Poland — Product: Twilight Odense - Pole Top | Grey
Ph: Anna Rejmer



POLE TOP

2200K | 3000K | 4000K

Ø323×190 mm

up to 4590lm

up to 102lm/W

E | SM | ST0.5 | ST1.2

Outgoing cable

2200K | 3000K | 4000K

CRI65 | CRI80

IP66 | IK10

Class II

Middle of the night

DALI | DALI-2

NEMA

Mounting accessories to be ordered separately

Diffuser to be ordered separately (Ø650 mm)

Body finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

Diffuser finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

ADI DESIGN INDEX
Selezione Compasso d'Oro

Visit our website for more information

FIAMMA

design Michele De Lucchi



Residence Litta - Milan, Italy — Product: Fiamma - Pole Top | Grey
Ph: Marco Beck Peccoz



POLE TOP

3000K

Ø506×3600 mm

up to 4300lm

up to 85lm/W

SM

Complete with pole

CRI80



PENDANT

3000K

Ø506×1337 mm

up to 4300lm

up to 85lm/W

SM

Complete with electronic power supply

CRI80



WALL MOUNTED

3000K

Ø506×1030 mm

up to 4300lm

up to 85lm/W

SM

Complete with electronic power supply

CRI80

3000K

CRI80

IP66 | IK08

Class I

DALI-2

Finishes

01
White

04
Black

15
Grey

F5
Rust brown

reddot winner 2016
best of the best

Visit our website
for more information

LA VENARIA

design Michele De Lucchi



Sharjah Mosque - Sharjah, United Arab Emirates — Product: La Venaria
Ph: Ales Photography



LA VENARIA

4000K

Ø1411×9300 mm

up to 27000lm

up to 79lm/W

A | SM

Complete with pole

CRI80

4000K

CRI80

IP67 | IK07

Class II

ON/OFF

Finish

15
Grey

Visit our website
for more information

STREET

design iGuzzini











POLE TOP 416×211 mm	POLE TOP 529×268 mm	POLE TOP 650×328 mm
2200 K | 2700 K | 3000 K | 4000 K | 5700 K	2200 K | 2700 K | 3000 K | 4000 K | 5700 K	2200 K | 2700 K | 3000 K | 4000 K | 5700 K
up to 5790lm	up to 13620lm	up to 27100lm
up to 141lm/W	up to 155lm/W	up to 157lm/W
A60 | ST1.0 | ST1.5 | ST1.5U | ST1U | STCy0.5 | STWt1 | STWt1.5 | STZI | STZr	A60 | ST1.0 | ST1.2 | ST1.5 | STCy0.5 | STF1| STZI | STZr	A60 | ST1.0 | ST1.2 | ST1.5 | STZI | STZr
CRI70 | CRI80	CRI70 | CRI80	CRI70 | CRI80

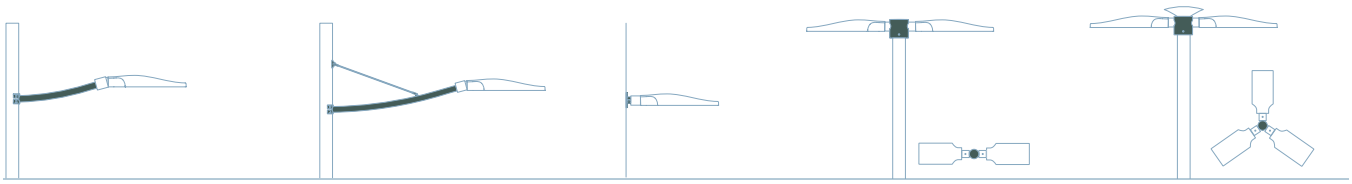

Single | With tie-rod | Wall attachment | Double | Triple

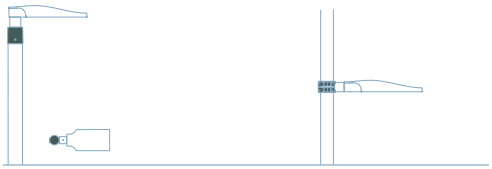

Single | With intermediate fitting tie-rod

2200 K | 2700 K | 3000 K | 4000 K | 5700 K
CRI70 | CRI80
IP66, IP67 | IK07, IK09
Class II
ON/OFF
DALI-2
Midnight | Midnight preset/DALI NFC | Midnight preset/NEMA | Midnight preset
Zhaga
Mounting accessories to be ordered separately

Finishes



01 White
04 Black
15 Grey
F5 Rust brown

Intelligent Light Solutions
Smart controls:
Zhaga Socket
Nema Socket

Visit our website for more information

BILLBOARD

design iGuzzini





460×209 POLE TOP

3000K | 4000K

450×209 mm

up to 9760lm

up to 163lm/W

ASF | STM | STW

CRI70



516×259 POLE TOP

3000K | 4000K

516×259 mm

up to 21.720lm

up to 135lm/W

ASF | STM | STW

CRI70

3000K | 4000K

CRI70

IP66 | IK10

Class II

Middle of the night

Midnight Preset / Zhaga

Mounting accessories
to be ordered separately

Finish

U9
Grey (RAL 7010)


Visit our website
for more information


RESTAURANT
← Reception

POLE AND WALL MOUNTED MULTIPLE FLOODLIGHTS



344 | NEWFO INOUT



345 | AGORÁ



348 | PALCO INOUT



350 | WOODY



352 | PLATEA PRO



354 | IPRO



356 | LINGOTTO

NEWFO INOUT

design iGuzzini



MULTI NEWFO INOUT ON POLE

2200K | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White | Tunable Warm

Ø125 | Ø162 | Ø176 mm

up to 6000lm

up to 125lm/W

SS | S | M | F | WF | VWF | SS+HC | S+HC | M+HC | F+HC | WF+HC | VWF+HC | Blade

CRI80 | CRI90



MULTI NEWFO INOUT WALL MOUNTED

2200K | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White | Tunable Warm

Ø125 | Ø162 | Ø176 mm

up to 6000lm

up to 125lm/W

SS | S | M | F | WF | VWF | SS+HC | S+HC | M+HC | F+HC | WF+HC | VWF+HC | Blade

CRI80 | CRI90



MULTI NEWFO INOUT WITH MINIMAL AND CONNECTED POLE

2200K | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White | Tunable Warm

Ø125 | Ø162 | Ø176 mm

up to 6000lm

up to 125lm/W

SS | S | M | F | WF | VWF | SS+HC | S+HC | M+HC | F+HC | WF+HC | VWF+HC | Blade

CRI80 | CRI90

Other versions available

Floodlights p. 378



Newfo InOut Ø76 mm



Newfo InOut Ø98 mm



Newfo InOut Ø125 mm



Newfo InOut Ø125 mm



Newfo InOut Ø176 mm



Newfo InOut Ø205 mm

2200K | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White | Tunable Warm

CRI80 | CRI90

IP66 | IK07 | IK08

Class II

DALI-2 | 1-10V | DMX-RDM

Mounting accessories to be purchased separately

DALI-2 | Casambi | DMX

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Quick DMX

Master Pro Evo

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

07 Green

Raster Finishes

01 White

04 Black

15 Grey

F5 Rust brown

07 Green

F7 Glossy copper

H3 Glossy black

M3 Glossy sand

M4 Glossy lead

M5 Glossy urban bronze

I9 Satin transparent

Decorative frame to be ordered separately

Visit our website for more information

Newfo InOut: 3 sizes (Ø76/98/125 mm) available from April 2026
Newfo InOut: 3 sizes (Ø125/152/176 mm) available from March 2027

AGORÀ

design Jean-Michel Wilmotte



Massa Marittima town centre, Italy — Product: Agorà Ø368 mm compact, Black
Ph: Paolo Carlini

AGORÀ

design Jean-Michel Wilmotte



MULTI AGORÀ ON POLE

2200K | 2700K | 3000K | 4000K

Ø313×363 | Ø368×421 | Ø516×571 mm

up to 39904lm

up to 130lm/W

ESS | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5

CRI65 | CRI80



MULTI AGORÀ WITH MINIMAL AND CONNECTED POLE

2200K | 2700K | 3000K | 4000K

Ø204×242 | Ø254×303 | Ø313×363 | Ø368×421 | Ø516×571 mm

up to 39904lm

up to 130lm/W

ESS | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5

CRI65 | CRI80



MULTI AGORÀ WALL MOUNTED

2200K | 2700K | 3000K | 4000K

Ø313×363 | Ø368×421 | Ø516×571 mm

up to 39904lm


up to 130lm/W

ESS | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5

CRI65 | CRI80

Other versions available

Floodlights p. 380



Agorà Ø204 mm slim



Agorà Ø254 mm slim



Agorà Ø254 mm compact




Agorà Ø313 mm slim



Agorà Ø313 mm compact



Agorà Ø368 mm slim



Agorà Ø368 mm compact



Agorà Ø516 mm slim



Agorà Ø516 mm compact



Agorà Ø516 mm compact CoB

2200K | 2700K | 3000K | 4000K

CRI65 | CRI80

IP66 | IK08

Class I, II

DALI-2

Mounting accessories to be purchased separately

Finishes



01 White



04 Black



15 Grey



F5 Rust brown

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Other awards

Good Design Awards 2023

BrightStar Awards 2023

Compasso d'Oro Internazionale 2025

Visit our website for more information



“Il Tulipano” complex –Terni, Italy — Product: Agorà - Super Spot optic | Ø368×421 mm | Grey
Ph: Luca Petrucci

PALCO INOUT

design Artec Studio



Passetto staircase – Ancona, Italy — Product: Palco InOut - Minimal and connected pole | Wide Flood | Black
Ph: Fabio Di Carlo



MULTI PALCO INOUT ON POLE

2700K | 3000K | 4000K

Ø83 | Ø119 | framer Ø116 | Ø137 | Ø153 mm

Ø137 mm, Ø153 mm"

up to 6715lm

up to 117lm/W

SS | S | M | F | WF | VWF | Framer

2 PG

CRI80



MULTI PALCO INOUT WALL MOUNTED

2700K | 3000K | 4000K

Ø83 | Ø119 | Ø137 | Ø153 mm

up to 6715lm

up to 117lm/W

SS | S | M | F | WF | VWF

2 PG

CRI80



MULTI PALCO INOUT WITH MINIMAL AND CONNECTED POLE

2700K | 3000K | 4000K

Ø83 | Ø119 | framer Ø116 | Ø137 | Ø153 mm

up to 8585lm

up to 106lm/W


SS | S | M | F | WF | VWF Framer

Outgoing cable


CRI80

Other versions available

Floodlights p. 384



Palco InOut Ø30 mm




Palco InOut framer Ø30 mm



Palco InOut Ø49 mm



Palco InOut Ø83 mm



Palco InOut Ø119 mm



Palco InOut Ø119 mm



Palco InOut framer Ø116 mm



Palco InOut Ø137 mm



Palco InOut Ø153 mm



Palco InOut framer Ø153 mm

Bollards p. 440



Palco InOut Ø30 mm



Palco InOut Framer Ø30 mm



Palco InOut Ø49 mm

2700K | 3000K | 4000K

CRI80

IP66 | IK07

Class II, III

ON/OFF

DALI-2

Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

Lux Awards 2019
Premims Delta Bronzo 2020

Visit our website for more information

WOODY

design Mario Cucinella



Stasjonsallmenningen, Nordenga Bridge and Sørenga -Bjørvika Oslo — Product: Woody - Minimal and connected pole | Ø 260 | Grey
Ph: Tomasz Majewski



MULTI WOODY ON POLE

3000K | 4000K | RGB
Ø260| Ø315 | Ø380 mm
up to 7000lm
up to 123lm/W
S | F | WF | ST1 | ST1.2
CRI70 | CRI80



MULTI WOODY WALL MOUNTED

3000K | 4000K | RGB
Ø260 | Ø315 | Ø380 mm
up to 7000lm
up to 123lm/W
S | F | WF | ST1 | ST1.2
CRI70 | CRI80



MULTI WOODY WITH MINIMAL AND CONNECTED POLE

3000K | 4000K | RGB
Ø260 mm | Ø315 mm
up to 11158lm
up to 121lm/W
S | F | WF | ST 1 | ST 1.2
CRI70 | CRI80

Other versions available

Floodlights p. 388



Maxi Woody
Compact
Ø260 mm



Maxi Woody
Ø315 mm



Maxi Woody
Ø380 mm

3000K - 4000K - RGB
CRI70 / CRI80
IP67 | IK08
Class II
DALI-2 | 1-10V | DMX-RDM
Mounting accessories
to be purchased separately

Finishes

01
White

04
Black

15
Grey

F5
Rust brown

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)
Quick DALI
Quick DMX
Master Pro Evo
Master Pro DMX

Smart services:

Jiminy - Push Notification

Other awards
Intel Design Award 2003

Visit our website
for more information

PLATEA PRO

design Jean-Michel Wilmotte




Copenhill-Copenhagen, Denmark — Product: Platea Pro - Wall mounted | 296×214 mm | Grey
Ph: Tomasz Majewski



MULTI PLATEA PRO ON POLE

3000K | 4000K | RGBW 4000K
296×214 mm
up to 4410lm
up to 133lm/W
SS | S | F | WF | E | WW | A45
CRI70 | CRI80



MULTI PLATEA PRO WALL MOUNTED

3000K | 4000K | RGBW 4000K
296×214 mm
up to 4410lm
up to 133lm/W
SS | S | F | WF | E | WW | A45
CRI70 | CRI80

Other versions available

Floodlights p. 390

Pole and wall mounted systems p. 314



Floodlight
296×214 mm



Floodlight
406×276 mm



Platea Pro
on pole
296×214 mm



Platea Pro
on pole
406×276 mm



Platea Pro
wall mounted
296×214 mm



Platea Pro
wall mounted
406×276 mm

3000K | 4000K | RGBW 4000K
CRI70 | CRI80
IP66 | IK08
Class II
DMX-RDM
DALI-2
Mounting accessories
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)
Quick DALI
Quick DMX
Master Pro Evo
Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01
White

04
Black

15
Grey

F5
Rust brown

Visit our website
for more information

Platea Pro: pole versions
new optics available
from November

IPRO

design Mario Cucinella



"Las Llanas" - Burgos, Spain — Product: iPro - Wall mounted and Minimaland connected pole | 192×192×200 mm| Grey
Ph: David Cardelús



MULTI IPRO ON POLE

3000K | 4000K

192×192×200 mm

up to 3280lm

up to 105lm/W

S | M

CRI80



MULTI IPRO WALL MOUNTED

3000K | 4000K

192×192×200 mm

up to 3280lm

up to 105lm/W

S | M

CRI80



MULTI IPRO WITH MINIMAL AND CONNECTED POLE

3000K | 4000K | RGB | RGBW
4000K | Tunable white

192×192×200 mm

up to 6609lm

up to 111lm/W

A60 | F | M | S | SS | ST1.0 | VWF | WF

CRI70 | CRI80

Other versions available

Floodlights p. 392

Lighting effect luminaires p. 482



iPro 51 mm



iPro 81 mm



iPro 132 mm



iPro 155 mm



iPro 192 mm



iPro Wall
lighting effects

Wall mounted luminaries p. 454

Ceiling mounted luminaires p. 474



iPro 51 mm
wall mounted



iPro 81 mm
wall mounted



iPro 132 mm
wall mounted



iPro 51 mm
ceiling mounted



iPro 51 mm
ceiling mounted



iPro 51 mm
ceiling mounted



iPro 155 mm
wall mounted



iPro 192 mm
wall mounted



iPro 51 mm
ceiling mounted



iPro 51 mm
ceiling mounted

3000K | 4000K | RGB | RGBW
4000K | Tunable white

CRI70 | CRI80

IP66 | IK07

Class I, II

DMX-RDM

DALI-2

Mounting accessories
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Quick DMX

Master Pro Evo

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01
White

04
Black

15
Grey

F5
Rust brown

reddot winner 2010
best of the best

Visit our website
for more information

LINGOTTO

design Renzo Piano







Other versions available

Floodlights p. 394



Lingotto without base



Lingotto with base



Lingotto with external box

MULTI LINGOTTO ON POLE

2200K | 3000K | 4000K
270×240 mm
up to 5380lm
up to 128lm/W
A60 | ST1.0 | ST1.5 | STCy0.5
Outgoing cable / through wiring
CRI70 | CRI80

MULTI LINGOTTO WITH MINIMAL AND CONNECTED POLE

2200K | 3000K | 4000K
270×240 mm
up to 5380lm
up to 128lm/W
A60 | ST1.0 | ST1.5 | STCy0.5
Outgoing cable
CRI70 | CRI80

2200K | 3000K | 3500K | 4000K
CRI65 | CRI70 | CRI80
IP20, IP66 | IK06, IK07
Class I, II
DALI-2
Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

01 White
04 Black
15 Grey
F5 Rust brown
73 Grey/Yellow

Visit our website for more information



POLES



360 | WOODEN POLE



361 | CONICAL WITH CURVED POLE



362 | POLE WITH CURVED ARM



363 | CYLINDRICAL POLE



364 | TAPERED POLE



365 | CONICAL POLE



366 | MINIMAL AND CONNECTED POLE

WOODEN POLE

design iGuzzini



CYLINDRICAL

Ø140×3000 | Ø140×4000 |
Ø140×5000 | Ø140×6000 mm

Base / head diameter	Coupling diameter	Height	Lid dimensions	Flange drilling
Ø140	Ø76	3000	400×85	FL | FM | FN
Ø140	Ø76	4000	400×85	FL | FM | FN
Ø140	Ø76	5000	400×85	FL | FM | FN
Ø140	Ø76	6000	400×85	FL | FM | FN



CONICAL

Ø90×3000 | Ø90×4000 |
Ø90×5000 | Ø90×6000 |
Ø100×6000 | Ø100×6000 |
Ø100×8000 | Ø120×10000 mm

Base / head diameter	Coupling diameter	Height	Lid dimensions	Flange drilling
Ø140/Ø90	Ø76	3000	400×85	FL | FM | FN
Ø140/Ø90	Ø76	4000	400×85	FL | FM | FN
Ø140/Ø90	Ø76	5000	400×85	FL | FM | FN
Ø148/Ø90	Ø76	6000	400×85	FL | FM | FN
Ø168/Ø100	Ø76	6000	400×85	FL | FM | FN
Ø168/Ø100	Ø76	7000	400×85	FL | FM | FN
Ø193/Ø100	Ø76	8000	485×85	FL | FM | FN
Ø219/Ø120	Ø76	10000	500×100	FL | FM | FN



CONICAL WITH SQUARE BASE

Ø114×4000 | Ø114×5000 |
Ø140×6000 | Ø140×6000|
Ø140×7000 | Ø168×8000 |
Ø168×10000 mm

Base / head diameter	Coupling diameter	Height	Lid dimensions	Flange drilling
140×140/Ø114	Ø76	4000	400×85	FL | FM | FN
140×140/Ø114	Ø76	5000	400×85	FL | FM | FN
140×140/Ø114	Ø76	6000	400×85	FL | FM | FN
160×160/Ø140	Ø76	6000	400×85	FL | FM | FN
160×160/Ø140	Ø76	7000	400×85	FL | FM | FN
180×180/Ø168	Ø76	8000	400×85	FL | FM | FN
200×200/Ø168	Ø76	10000	500×100	FL | FM | FN

Finishes

M8
Cinnamon/Silver grey

M9
Cinnamon/Sand grey

N1
Cinnamon/Graphite grey

N2
Saffron/Silver grey


N3
Saffron/Sand grey

04
Saffron/Graphite grey

N5
Ony×/Silver grey

N6
Ony×/Sand grey

N7
Ony×/Graphite grey



Visit our website
for more information

CONICAL CURVED POLE

design iGuzzini



Finishes

15
Grey


74
Grey/Black

WITH PLATE AND INTERMEDIATE SUPPORT

Ø60×6000 mm | Ø60×8000 mm


Plate: Ø147-70 mm | Ø172-70 mm

Plate and intermediate support: Ø147-70 mm | Ø172-70 mm

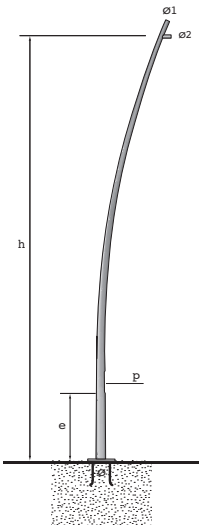

POLE WITH PLATE

Base / head diameter (Ø / Ø1)	Coupling diameter (Ø2)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
147/70	60	6000	3	72	400×90	800
172/70	60	8000	3	94	400×90	800

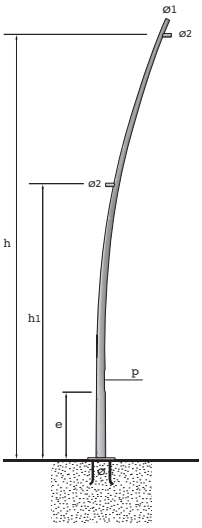

POLE WITH PLATE AND INTERMEDIATE SUPPORT

Base / head diameter (Ø / Ø1)	Coupling diameter (Ø2)	Height (h)	Height (h1)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
147/70	60	6000	4000	3	73	400×90	800
172/70	60	8000	4000	3	95	400×90	800

Visit our website
for more information

POLE WITH CURVED ARM

design iGuzzini



Finishes

15
Grey

04
Black


POLE WITH CURVED ARM

Ø76×6700 mm | Ø102×8700 mm

With double arm:
Ø76×6700 mm | Ø76×8700 mm

With plate:
Ø76×6700 mm | Ø76×8700 mm

With plate and double arm:
Ø76×6700 mm | Ø76×8700 mm

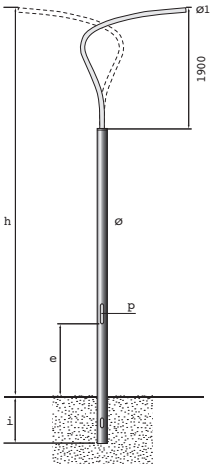


BURIED POLE WITH ARM

Diameter pole (Ø)	Coupling diameter (Ø1)	Height above ground (h)	Height to be buried holes (i)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
160	76	6700	800	3	94	310×95	1000
		8700	1000	4	148	310×95	1000

BURIED POLE WITH 2 ARMS

Diameter pole (Ø)	Coupling diameter (Ø1)	Height above ground (h)	Height to be buried holes (i)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
160	76	6700	800	3	118	310×95	1000
		8700	1000	4	172	310×95	1000

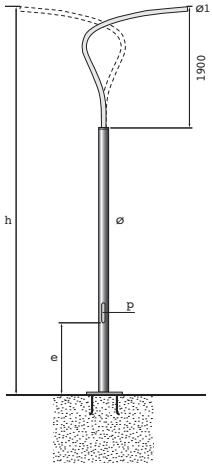

POLE WITH PLATE WITH ARM

Diameter pole (Ø)	Coupling diameter (Ø1)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
160	76	6700	3	97	310×95	1000
		8700	4	157	310×95	1000

POLE WITH PLATE WITH 2 ARMS

Diameter pole (Ø)	Coupling diameter (Ø1)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
160	76	6700	3	121	310×95	1000
		8700	4	181	310×95	1000

Visit our website
for more information

CYLINDRICAL POLE

design iGuzzini





Finishes

15
Grey

BURIED / WITH PLATE


Ø60×3000 | Ø60×4000 |
Ø76×4000 | Ø102×4000 |
Ø102×5600 | Ø102×6800 |
Ø102×8000 | Ø120×5600 |
Ø120×8000 | Ø120×10000 mm

With plate:
Ø76×4000 | Ø102×5000 |
Ø120×5000 | Ø120×7000 mm

WITH SHANK
BURIED / WITH PLATE


Ø76×4000 | Ø102×6000 |
Ø120×7000 | Ø120×8000 mm

With plate: Ø120×6000 |
Ø120×7000 | Ø120×8000 mm

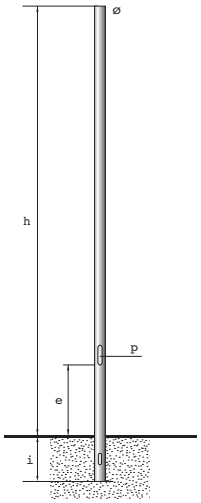

BURIED POLE

Diameter pole (Ø)	Height above ground (h)	Height to be buried holes (i)	Thickness	Weight (kg)	Hatch dimensions (p)	h from ground of lid (e)
60	2500	500	3	14	-	1064
	3500	500	5	29	-	1064
76	4000	600	4	35	132×38	1000
102	3500	500	3	30	186×45	1064
	5000	600	3	43	186×45	1064
	6000	800	4	66	186×45	1000
	7000	1000	4	78	186×45	1000
120	5000	600	3	52	310×95	1000
	7000	1000	4	97	310×95	1000
	9000	1000	4	120	186×45	1000

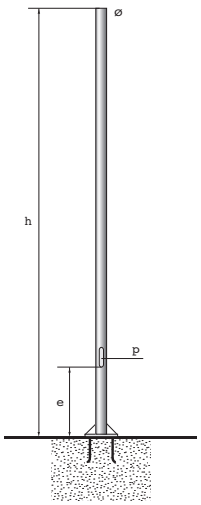

POLE WITH PLATE

Diameter pole (Ø)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
76	4000	4	40	132×38	1000
102	5000	3	49	186×45	1000
120	5000	3	55	310×95	1000
	7000	4	93	310×95	1000

Visit our website
for more information

TAPERED POLE

design iGuzzini



Finishes

15
Grey


BURIED / WITH PLATE

Ø102×8000 | Ø120×10000 |
Ø120×11000 | Ø120×12800 mm

With plate:
Ø159×6000 | Ø159×7000 |
Ø159×8000 | Ø120×9000 |
Ø120×10000 | Ø120×12000 mm


IP44 | IK08

Class II

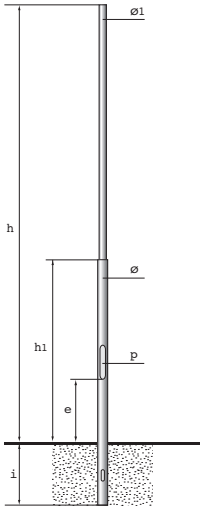

BURIED TAPERED POLE

Diameter pole (Ø /Ø1)	Height above ground (h)	Height (h1)	Height to be buried holes (i)	Thickness (Ø /Ø1)	Weight (kg)	Hatch dimensions (p)	h from ground of lid (e)
127/102	8000	3000	1000	4/4	102	186×45	1000
194/120	9000	3200	1000	4/3	152	310×95	1000
	9000	3200	1000	4/3	152	310×95	1000
	10000	3200	1000	4/3	164	310×95	1000
	12000	5200	800	4/4	212	400×90	600

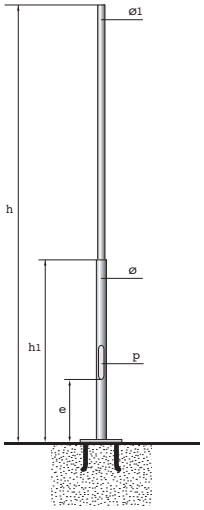

TAPERED POLE WITH PLATE

Diameter pole (Ø / Ø1)	Height (h)	Height (h1)	Thickness (Ø / Ø1)	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
159/102	6000	2000	3/3	91	310×95	1000
	7000	2000	4/3	111	310×95	1000
	8000	3000	4/4	133	310×95	1000
194/120	9000	3200	4/3	163	310×95	1000
	9000	3200	4/3	163	310×95	1000
	10000	3200	4/3	174	310×95	1000
	12000	5200	4/4	222	400×90	600

Visit our website
for more information

CONICAL POLE

design iGuzzini



Finishes

15
Grey


BURIED / WITH PLATE

Ø60×4600 | Ø60×7800 |
Ø60×9800 mm

With plate:
Ø60×7000 | Ø60×9000 mm


Base:
Ø106-60 | Ø138-60 | Ø158-60 mm

Base with plate:
Ø130-60 | Ø150-60 mm

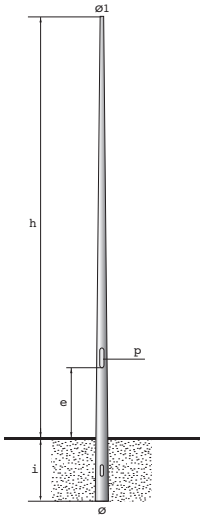

BURIED POLE

Base diameter (Ø)	Diameter of head (Ø1)	Height above ground (h)	Height to be buried holes (i)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
106	60	4000	600	3	29	186×45	800
138	60	7000	800	3	56	186×45	1000
158	60	9000	800	3	77	186×45	1000

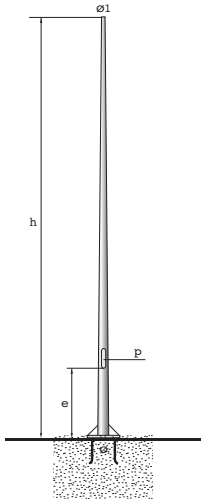

POLE WITH PLATE

Base diameter (Ø)	Diameter of head (Ø1)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
100	60	4000	3	39	186×45	800
130	60	7000	3	62	186×45	1000
150	60	9000	3	104	186×45	1000

Visit our website
for more information

MINIMAL AND CONNECTED POLE

design iGuzzini



MINIMAL AND CONNECTED POLE

Ø102×5600 | Ø102×7800 |
Ø120×9800 | Ø120×13000 mm

Ø102×5000 | Ø102×7000 |
Ø120×9000 | Ø120×12000 mm

With Bluetooth antenna:
Ø102×5600 | Ø102×7800 |
Ø120×9800 | Ø120×13000 mm

With Bluetooth antenna:
Ø102×5000 | Ø102×7000 |
Ø120×9000 | Ø120×12000 mm

MINIMAL AND CONNECTED POLE WITH PLATE

Base / head diameter	Coupling diameter	Height	Thickness	Weight	Lid dimensions	Flange drilling
Ø120 / Ø76	Ø76	3500	3	34	310×95	FB | FJ
Ø159 / Ø102	Ø102	5000	3	59	310×95	FA | FB | FC | FD
Ø159 / Ø102	Ø102	7000	4	96	310×95	FA | FC | FD | FE | FF | FG
Ø194 / Ø120	Ø120	9000	4	145	310×95	FC | FD | FE | FF | FG | FH
Ø219 / Ø120	Ø120	12000	4	199	310×95	FB | FC | FD | FE | FG | FI

MINIMAL AND CONNECTED BURIED PLE

Base / head diameter	Coupling diameter	Height	Height above ground	Thickness	Weight	Lid dimensions	Flange drilling
Ø120 / Ø76	Ø76	4100	3500	3	34	310×95	FB | FJ
Ø159 / Ø102	Ø102	5600	5000	3	59	310×95	FA | FB | FC | FD
Ø159 / Ø102	Ø102	7800	7000	4	96	310×95	FA | FC | FD | FE | FF | FG
Ø194 / Ø120	Ø120	9800	9000	4	145	310×95	FC | FD | FE | FF | FG | FH
Ø219 / Ø120	Ø120	12600	12000	4	199	310×95	FB | FC | FD | FE | FG | FI

FLANGE DRILLING

Vertical



FA (4 products)
FE (5 products)
FI (9 products)
FH (7 products)

Horizontal



FB (4 products)
FC (8 products)
FF (12 products)

Elica 90°



FD (4 products)

Elica 60°



FG (6 products)
FK (5 products)

Simmetrical 120°



FJ (3 products)

Steel Flange 71×115 mm

Double door 310×95 mm

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

Visit our website for more information



Product: Minimal and connected pole



LINEAR SYSTEMS



370 | LINEALUCE 27



372 | LINEALUCE 47



374 | UNDERSCORE INOUT

LINEALUCE 27

design Jean-Michel Wilmotte



Passetto staircase – Ancona, Italy — Product: Linealuce 27 - surface Full Remote | Grey
Ph: Fabio Di Carlo



SURFACE FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

39×69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML |WGS - HC | WGM - HC | WGWF - HC | S | F | WF | E | GL No Dot | WG No Dot

CRI80



SPAN WIRE FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80

ACCESSORIES

1 Honeycomb Louvre
2 Transversal
3 Diffuser
4 Longitudinal Louvre
5 Visor + Transversal Louvre
6 Visor
7 Elliptical Filter
8 Ikio Frame

1


2


3


4


5


6


7


8


Other versions available

Pendants p. 144 / Ceiling mounted luminaires p. 472 / Recessed in-ground luminaires p. 406

Linealuce 27 surface Full Remote



Linealuce 27 pendant Full Remote

Linealuce 27 recessed Full Remote



Linealuce 27 span-wire

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 | IK06, IK09

Walkable (1000kg)

Class III

PWM

External

Mounting accessories to be purchased separately

Power supplies to be purchased separately

PEP ECOPASSPORT

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

reddot winner 2023 best of the best

Other awards
Grand Prix du Design (Gold) 2024
BrightStar Awards 2024

Visit our website for more information

LINEALUCE 47

design Jean-Michel Wilmotte



Caixa Forum –Barcelona, Spain — Product: Linealuce 47 - Recessed remote | Grey
Ph: Artel Ramirez



SURFACE REMOTE

2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
47×83 mm
340 | 611 | 908 | 1205 | 1502 mm
up to 5530lm
up to 96lm/W
WGS | WGM | WGWF | S | F | WF
CRI80



SURFACE INTEGRAL

2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
47×83 mm
340 | 611 | 908 | 1205| 1502 mm
up to 5530lm
up to 88lm/W
WGS | WGM | WGWF | S | F | WF
CRI80



SURFACE INTEGRAL SIDE BOX

2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
102×52 mm
340 | 611 | 908 | 1205| 1502 mm
up to 5146lm
up to 86lm/W
WGS | WGM | WGWF
CRI80



RECESSED REMOTE

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87×106 mm
340 | 610 | 907 | 1204| 1501 mm
up to 4260lm
up to 89lm/W
WGS | WGM | WGWF | WF
CRI80



RECESSED INTEGRAL

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm


up to 84lm/W

WGS | WGM | WGWF | WF

CRI80

ACCESSORIES

1 Longitudinal louvre
2 Transversal louvre
3 Honeycomb louvre
4 Elliptical filter 25° × 45°
5 Elliptical filter 40° × 85°
6 Asymmetric external screen
7 Symmetric external screen

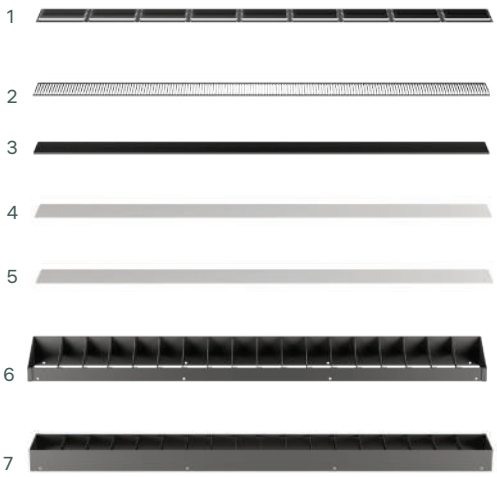

Other versions available

Ceiling mounted luminaires p. 471

Recessed ceiling luminaires p. 423

Recessed wall luminaires p. 417



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce47 recessed Remote



Linealuce 47 recessed Integral



Linealuce47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGB-W 3000K | RGB-W 4000K | Tunable White

CRI80

IP66, IP67 | IK06, IK10

Class II, III

Walkable (2000kg)

DALI-2 | DMX-RDM

Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo


Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01 White

04 Black

15 Grey

F5 Rust brown

Visit our website for more information

UNDERSCORE INOUT

design iGuzzini



Attocube Systems AG office building - Haar, Germany — Product: Underscore InOut - Top Bend 16 mm | White



SIDE BEND 10 mm

2600K | 2900K | 3700K | 4600K | RGB

L from 254 mm to 7004 mm

up to 3448lm

up to 73lm/W

GL

CRI80



SIDE BEND 16 mm

2600K | 2900K | 3700K | 4600K | RGB | Tunable white

L from 254 mm to 7004 mm

up to 3690lm

up to 78lm/W

GL

CRI80



TOP BEND 16 mm

2600K | 2900K | 3800K | 4600K | RGB | Tunable white


L from 254 mm to 7004 mm

up to 5601lm

up to 74lm/W

GL

CRI80



PIXEL TOP BEND 16 mm

RGBW

L from 337 mm to 7004 mm

up to 1281lm

up to 25lm/W

GL (addressable every 83 mm)

Other versions available

Lighting effect luminaires p. 484



Underscore InOut Side Bend 10 mm



Underscore InOut Side Bend 16 mm



Underscore InOut Top Bend 16 mm



Underscore InOut Top Bend 16 mm

2600K | 2900K | 3700K | 3800K | 4600K | RGB | Tunable White | RGB-W

CRI80

IP68 | IK10

Class III

PWM 24Vdc | SPI

Power supply
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01
White

ArchiExpo i-NOVO Awards 2016


Visit our website
for more information




FLOODLIGHTS



378 | NEWFO INOUT



380 | AGORÁ



384 | PALCO INOUT



388 | WOODY



390 | PLATEA PRO



392 | IPRO



394 | LINGOTTO

396 | LINEALUCE 27



397 | LINEALUCE 47

NEWFO INOUT

design iGuzzini





Ø76 mm
2200K | 2700K | 3000K | 3500K | 4000K
up to 850 lm
up to 90lm/W
M | F | WF | M+HC | F+HC | WF+HC | Blade
CRI80 | CRI90



Ø98 mm
2200K | 2700K | 3000K | 3500K | 4000K |
up to 1500lm
up to 100lm/W
S | M | F | WF | VWF | S+HC | M+HC | F+HC | WF + HC | VWF + HC | Blade
CRI80 | CRI90



Ø125 mm
2200K | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White | Tunable Warm
up to 3000lm
up to 120lm/W
SS | S | M | F | WF | VWF | SS+HC | S+HC | M+HC | F+HC | WF+HC | VWF+HC | Blade
CRI80 | CRI90





Ø176 mm	Ø205 mm
2200K | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White | Tunable Warm	2200K | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White | Tunable Warm
up to 4000lm	up to 6000lm
up to 125lm/W	up to 125lm/W
SS | S | M | F | WF | VWF | SS+HC | S+HC | HC | F+HC | WF+HC | VWF+HC	SS | S | M | F | WF | VWF | SS+HC | S+HC | M+HC | F+HC | WF+HC | VWF+HC
CRI80 | CRI90	CRI80 | CRI90

Other versions available

Pole and wall mounted multiple floodlights p. 344



Multi Newfo InOut on pole



Multi Newfo InOut wall mounted



Multi Newfo InOut with minimal and connected pole

2200K | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White | Tunable Warm

CRI80 | CRI90

IP66 | IK07

Class II | Class III

DALI-2 | Casambi | DMX

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- 07 Green

Raster Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- 07 Green
- F7 Glossy copper
- H3 Glossy black
- M3 Glossy sand
- M4 Glossy lead
- M5 Glossy urban bronze
- I9 Satin transparent

Visit our website for more information


Newfo InOut: 3 sizes (Ø76/98/125mm) available from April 2026
Newfo InOut: 3 sizes (Ø125/152/176mm) available from March 2027

AGORÀ

design Jean-Michel Wilmotte



Public lighting - Ascoli Piceno, Italy — Product: Agorà - Ø313mm compact | Grey
Ph: Fabio Di Carlo



Ø204 mm SLIM
2200K | 2700K | 3000K | 4000K
up to 3889lm
up to 100lm/W
US | SS | S | F | WF | WW
CRI80



Ø254 mm SLIM
2200K | 2700K | 3000K | 4000K
up to 6045lm
up to 99lm/W
US | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5
CRI70 | CRI80



Ø254 mm COMPACT
2200K | 2700K | 3000K | 4000K
up to 4350lm
up to 113lm/W
US | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5
CRI70 | CRI80



Ø313 mm SLIM
2200K | 2700K | 3000K | 4000K
up to 10665lm
up to 106lm/W
US | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5
CRI70 | CRI80



Ø313 mm COMPACT

2200K | 2700K | 3000K | 4000K | RGB-W 3000K | RGBW Fluid Color | Tunable white

up to 9625lm

up to 110lm/W

US | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5

CRI70 | CRI80



Ø368 mm SLIM

2200K | 2700K | 3000K | 4000K

up to 19481lm

up to 110lm/W

US |SS | S | F | WF

CRI80



Ø368 mm COMPACT

2200K | 2700K | 3000K | 4000K | RGB-W 3000K | RGBW Fluid Color | Tunable white

up to 18172lm

up to 112lm/W

US | SS | S | F | WF

CRI80



Ø516 mm SLIM

2200K | 2700K | 3000K | 4000K

up to 30184lm

up to 112lm/W

US | SS | S | F | WF

CRI80



Ø516 mm COMPACT

2200K | 2700K | 3000K | 4000K | RGB-W 3000K | RGBW Fluid Color | Tunable white

up to 30415lm

up to 113lm/W

US |SS | S | F | WF

CRI80



Ø516 mm COMPACT COB

2200K | 2700K | 3000K | 4000K

up to 39904lm

up to 130lm/W

F | WF | VWF

CRI65 | CRI80

Other versions available

Pole and wall mounted multiple floodlights p. 345



Multi Agorà on pole



Multi Agorà with minimal and connected pole



Multi Agorà wall mounted

AGORÀ

design Jean-Michel Wilmotte

ACCESSORIES

AGORÀ SLIM


1 Floodlight mounting bracket
2 Lighting body
3 Diffuser glass
4 Crossways blade louvre
5 Refractor for elliptical distribution
6 Protection grille
7 Cylindrical screen
8 Cylindrical Screen at 45°



1 2 3 4 5 6 7 8

AGORÀ COMPACT

1 Diffuser glass
2 Crossways blade louvre
3 Refractor for elliptical distribution
4 Protection grille
5 Cylindrical screen
6 Cylindrical Screen at 45°



1 2 3 4 5 6

2200K | 2700K | 3000K | 4000K | RGBW 3000K | Tunable white | RGBW Fluidcolor

CRI65 | CRI70 | CRI80

IP66 | IK08

Class I | Class II | Class III

DALI-2 | DMX-RDM

Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01 White
04 Black
15 Grey
F5 Rust brown

reddot winner 2024 best of the best

Other awards
Good Design Awards 2023
BrightStar Award 2023
Compasso d'Oro Internazionale 2025

Visit our website for more information




Massa Marittima town centre, Italy — Product: Agorà | Rust brown
Ph: Paolo Carlini

PALCO INOUT


design Artec Studio




Sferisterio –Macerata, Italy — Product: Palco InOut - ø 153mm | Cylindrical screen | Grey/Black
Ph: iGuzzini archive




Ø30 mm
2700K | 3000K | 4000K
up to 189lm
up to 75lm/W
S | M
CRI80



FRAMER Ø30 mm
2700K | 3000K | 4000K
up to 6lm
up to 2lm/W
Framer
CRI80



Ø49 mm
2700K | 3000K | 4000K
up to 518lm
up to 85lm/W
S | M | WF
CRI80



Ø83 mm
2700K | 3000K | 4000K
up to 1982lm
up to 124lm/W
SS | S | M | WF | VWF
CRI80



Ø119 mm
2700K | 3000K | 4000K
up to 2679lm
up to 101lm/W
SS | S | M | WF | VWF
CRI80



FRAMER Ø116 mm
2700K | 3000K | 4000K
up to 1032lm
up to 30lm/W
Framer
CRI80



Ø137 mm
3000K | 4000K
up to 3978lm
up to 105lm/W
SS | S | M | F | WF | VWF
CRI80



Ø153 mm
3000K | 4000K
up to 8585lm
up to 106lm/W
M | F | WF | VWF
CRI80



FRAMER Ø153 mm
3000K | 4000K
up to 1275lm
up to 20lm/W
Framer
CRI80

PALCO INOUT

design Artec Studio

ACCESSORIES

PALCO INOUT Ø30 / Ø49 / Ø83

1 Refractor for elliptical distribution IP66
2 Diffuser glass IP66
3 Honeycomb louvre IP66
4 Accessory support frame
5 Blade louvre
6 Cylindrical screen
7 Cylindrical Screen at 45°



PALCO INOUT Ø 83 / Ø 119 / Ø 137 / Ø 153

1 Refractor for elliptical distribution IP66
2 Diffuser glass IP66
3 Honeycomb louvre IP66
4 Accessory support frame
5 Protection grille
6 Blade louvre
7 Cylindrical screen
8 Cylindrical Screen at 45°
9 The directional flap can be fitted individually or with others
(max. 4) depending on lighting design requirements



PALCO INOUT FRAMER

1 Metal Gobo ø30 (a 20°) ø40 (a 25°)
2 Iride
3 Shaper
4 Support for gobos
5 Coloured filters
6 Metal Gobo ø 53.3 mm customized
7 Glass Gobo ø 53.3 mm customised



Other versions available

Pole and wall mounted multiple floodlights p. 348 / Bollards p. 440



Multi Palco InOut on pole



Multi Palco InOut wall mounted



Multi Palco InOut with minimal and connected pole



Palco InOut bollard

2700K | 3000K | 4000K

CRI80

IP66 | IK07

Class II, III

ON/OFF

DALI-2

Power supplies
to be purchased separately

Finishes

01
White

04
Black

15
Grey

F5
Rust brown

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Lux Awards 2019
Premims Delta Bronzo 2020

Visit our website
for more information

WOODY

design Mario Cucinella



San Rocco Complex–San Giovanni Teatino (Chieti), Italy — Product: Woody - Maxi Woody Ø315 mm | Grey
Ph: Fabio Di Carlo



MAXI WOODY COMPACT Ø260 mm
3000K | 4000K
up to 4404lm
up to 116lm/W
S | F | WF
2PG
CRI80



MAXI WOODY Ø315 mm
3000K | 4000K | RGB
up to 11158lm
up to 121lm/W
S | F | WF
2PG
CRI80




MAXI WOODY Ø380 mm
3000K | 4000K
up to 6500lm
up to 116lm/W
ST1 | ST1.2
2PG
CRI70

ACCESSORIES

MAXI WOODY

1 Interchangeable reflectors
2 Refractor for elliptical distribution
3 Diffuser glass
4 Protection grille
5 Visor
6 The cylindrical screen increases the definition of the S - Superspot cone for LED C.o.B versions
7 The directional flap can be fitted individually or with others (max. 4) depending on lighting design requirements

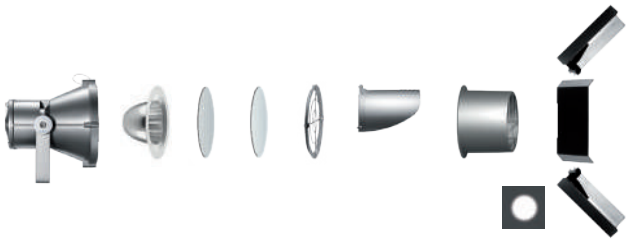

1 2 3 4 5 6 7

Other versions available

Pole and wall mounted multiple floodlights p. 350



Multi Woody on pole



Multi Woody wall mounted



Multi Woody with minimal and connected pole

3000K | 4000K | RGB
CRI70 | CRI70
IP66, IP67 | IK08, IK08
Class II
ON/OFF
DALI-2
1-10V
DMX-RDM

Intelligent Light Solutions
Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX
Smart services:
Jiminy - Push Notification

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

Other awards
Intel Design Award 2003

Visit our website for more information

PLATEA PRO

design Jean-Michel Wilmotte



Tisza Castle - Geszt, Hungary — Product: Platea Pro - Floodlight 296×214 mm | Grey
Ph: Gregimages, courtesy of All Light Kft





FLOODLIGHT 296×214 mm
3000K | 4000K | RGBW 4000K
up to 3116lm
up to 89lm/W
SS | S | F | WF | E | WW
2 PG through wiring
CRI80

FLOODLIGHT 406×276 mm
3000K | 4000K | RGBW 4000K
up to 8132lm
up to 98lm/W
SS | S | F | WF | E | WW
2 PG through wiring
CRI80

Other versions available

Pole and wall mounted multiple floodlights p. 352

Pole and wall mounted systems p. 314



Multi Platea Pro on pole



Multi Platea Pro wall mounted



Platea Pro top pole 296×214 mm



Platea Pro top pole 406×276 mm



Platea Pro wall mounted 296×214 mm



Platea Pro wall mounted 406×276 mm

ACCESSORIES

PLATEA PRO

1 Screen for elliptical distribution
2 Diffuser glass (to be installed internally)
3 Protection grille
4 Visor
5 Directional fins



1 2 3 4 5

3000K | 4000K | Tunable White | RGBW 4000K

CRI80

IP66 | IK08

Class II

DALI-2 | DMX-RDM

Finishes



01 White
04 Black
15 Grey
F5 Rust brown

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Visit our website for more information

IPRO

design Mario Cucinella



OWO -London, United Kingdom — Product: iPro - 155mm | Grey
Ph: James Newton



51×51 mm
3000K | 4000K
up to 389lm
up to 92lm/W
S | M | F | VWF | L
CRI80



81×81 mm
3000K | 4000K | RGB
up to 599lm
up to 77lm/W
S | F | VWF | EL | ET
CRI80



132×132 mm
3000K | 4000K
up to 1638lm
up to 92lm/W
S | M | F | WF | VWF
CRI80



155×155 mm
3000K | 4000K | Tunable white
up to 2457lm
up to 98lm/W
SS | S | M | F | WF | VWF
CRI80



192×192 mm

3000K | 4000K | RGB | RGBW
4000K | Tunable white

up to 6609lm

up to 111lm/W

SS | S | M | F | WF | VWF | ST1 | A60

CRI70 | CRI80

Other versions available

Pole and wall mounted multiple floodlights p. 353

Wall mounted luminaires p. 454



Multi Pro on pole



Multi Pro wall mounted



Multi Pro with minimal and connected pole



iPro wall

Ceiling mounted luminaires p. 474

Lighting effect luminaires p. 482



iPro ceiling



iPro Wall
Lighting effects

ACCESSORIES

IPRO Ø 132 / Ø 155 / Ø 192

1 Interchangeable reflectors
2 Refractor for elliptical distribution
3 Diffuser glass for C.o.B.
4 Prismatic diffuser glass
5 Accessory support frame
6 Cylindrical screen
7 Protection grille
8 Visor
9 The directional flap can be fitted individually or with others (max. 4) depending on lighting design requirements



1 2 3 4 5 6 7 8 9

3000K | 4000K | RGB | RGB-W
4000K | Tunable white

CRI70 | CRI80

IP66 | IK05, IK07

Class I, II, III

ON/OFF

DALI-2

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01 White

04 Black

15 Grey

F5 Rust brown

reddot winner 2010
best of the best

Visit our website
for more information

LINGOTTO

design Renzo Piano



LINGOTTO

design Renzo Piano



WITHOUT BASE

2200K | 3000K | 4000K
270×240 mm
up to 5380lm
up to 128lm/W
A60 | ST1.0 | ST1.5 | STCy0.5
CRI70 | CRI80



WITH BASE

2200K | 3000K | 3500K | 4000K
270×240 mm
up to 5380lm
up to 128lm/W
A60 | GL | ST1.0 | ST1.5 | STCy0.5
CRI65 | CRI70 | CRI80



WITH EXTERNAL BOX

2200K | 3000K | 3500K | 4000K | Tunable warm
270×240 mm
up to 6087lm
up to 116lm/W
S | F | WF | WW | A
CRI65 | CRI80
A | F | S | WF | WW

Other versions available

Pole and wall mounted multiple floodlights p. 356



Lingotto indoor wall mounted



Multi Lingotto on pole



Multi Lingotto with minimal and connected pole

2200K | 3000K | 3500K | 4000K | Tunable warm
CRI65 | CRI70 | CRI80
IP66 | IK07
Class I, II
DALI-2
Midnight preset/ZHAGA

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Zhaga Socket

Smart services:

Jiminy - Push Notification

Finishes

01 White
04 Black
15 Grey
F5 Rust brown
73 Grey/Yellow

Visit our website for more information

LINEALUCE 27

design Jean-Michel Wilmotte



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

39x69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 104lm/W

S | F | WF | E

CRI80

Other versions available

Linear systems p. 370 / Ceiling mounted luminaires p. 472 / Recessed in-ground luminaires p. 406

Linealuce 27 surface Full Remote



Linealuce 27 pendant Full Remote

Linealuce 27 recessed Full Remote



Linealuce 27 span-wire

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 (1m) | IK08, IK09

Resistance to static load (1000kg)

Class III

PWM

External

Mounting accessories to be ordered separately

Power supplies to be ordered separately

PEP ECOPASSPORT

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

reddot winner 2023 best of the best

Other awards

Grand Prix du Design (Gold) 2024

BrightStar Awards 2024

Visit our website for more information

LINEALUCE 47

design Jean-Michel Wilmotte





RECESSED REMOTE
2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87x106 mm
340 | 610 | 907 | 1204| 1501 mm
up to 23340lm
up to 55lm/W
WGS | WGM | WGWF | WF
Through wiring
CRI80

RECESSED INTEGRAL
2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87x106 mm
340 | 610 | 907 | 1204| 1501 mm
up to 23340lm
up to 55lm/W
WGS | WGM | WGWF | WF
Through wiring
CRI80

Other versions available

Ceiling mounted luminaires p. 471

Recessed ceiling luminaires p. 423

Recessed wall luminaires p. 417



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral

Linear systems p. 372



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
CRI80
IP66, IP67 | IK06, IK10
Class II, III
Resistance to static load (2000kg)
DALI-2 | DMX-RDM
Mounting accessories to be ordered separately

Intelligent Light Solutions
Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX
Smart services:
Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey



F5 Rust brown

Visit our website for more information



IN-GROUND LUMINAIRES



400 | LIGHT UP EARTH



402 | LIGHT UP ORBIT



404 | LINEALUCE 47

406 | LINEALUCE 27



408 | LUN-UP EVO

LIGHT UP EARTH

design Jean-Michel Wilmotte



The Fold - Dubai — Product: Light up Earth - Ø200, Wall washer | Steel
Ph: Gavriil Papadiotis





FLUSH
3000K | 4000K | RGBW 4000K
Ø144 | Ø200 | Ø250 mm
up to 5370lm
up to 115lm/W
SS | S | M | F | WF | WW | D | L
CRI80

FRAME
3000K | 4000K
Ø144 | Ø200 | Ø250 mm
up to 5370lm
up to 115lm/W
SS | S | M | F | WF | WW | D
CRI80

Other versions available

Lighting effect luminaires



Light Up Earth flush



Light Up Earth frame

3000K | 4000K | RGBW 4000K
CRI80
IP66, IP68 (10m) | IK10
Class II
Resistance to static load (5000kg)
DMX-RDM
DALI-2
Mounting accessories to be ordered separately

Intelligent Light Solutions
Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX
Smart services:
Jiminy - Push Notification

Finish

13
Steel

Visit our website
for more information

LIGHT UP ORBIT

design iGuzzini



Canva –Sydney, Australia — Product: Light Up Orbit - Body in stainless steel flush mountend | Ø50mm | Steel
Ph: Rohan Venn



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106.7lm/W

S | M | F | WF | WW | D | L

CRI80



BODY IN STAINLESS STEEL FLUSH

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106.7lm/W

S | M | F | WF | WW | D | L | E

CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106.7lm/W

S | M | F | WF | WW | L | E

CRI80

Other versions available

Lighting effect luminaires p. 486 / Recessed ceiling luminaires p. 424 / Recessed wall luminaires p. 414



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III

Resistance to static load (2000kg)

Power supply
to be ordered separately

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Body finishes

12
Steel

Body finishes flush

12
Steel

14
Gold

69
Bronze

E6
Burnished chrome

Body finishes all glass flush

04
Black

12
Steel

Visit our website
for more information

LINEALUCE 47

design Jean-Michel Wilmotte



Oman Museum Across Ages -Nizwa, Oman — Product: Linealuce 47 - Recessed Integral | Rust brown
Ph: Phillip Handforth





RECESSED REMOTE
2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87×106 mm
340 | 610 | 907 | 1204| 1501 mm
up to 4260lm
up to 89lm/W
WGS | WGM | WGWF | WF
CRI80

RECESSED INTEGRAL
2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87×106 mm
340 | 610 | 907 | 1204| 1501 mm
up to 4260lm
up to 84lm/W
WGS | WGM | WGWF | WF
CRI80

Other versions available

Linear systems p. 372 / Ceiling mounted luminaires p. 471 / Recessed ceiling luminaires p. 422 / Recessed wall luminaires p. 417



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
CRI80
IP66, IP67 | IK06, IK10
Class II, III
Resistance to static load (2000kg)
DMX-RDM
DALI-2
Mounting accessories to be ordered separately

Intelligent Light Solutions
Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX
Smart services:
Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

Visit our website for more information

LINEALUCE 27

design Jean-Michel Wilmotte



ZAC Marenda Lacan – Antibes, France — Product: Linealuce 27 - Recessed Full Remote| Grey
Ph: iGuzzini archive



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K
39×69 mm
356 | 652 | 947 | 1243 | 1538 mm
up to 1960lm
up to 103lm/W
WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML |WGS - HC | WGM - HC | WGWF - HC | S | F | WF | E | GL No Dot | WG No Dot
CRI80

Other versions available

Linear systems p. 370 / Ceiling mounted luminaires p. 473 /
Recessed in-ground luminaries luminaires p. 406

Linealuce 27 surface Full Remote



Linealuce 27 pendant Full Remote

Linealuce 27 recessed Full Remote



Linealuce 27 span-wire

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K
CRI80
IP66, IP68 (1m) | IK09
Resistance to static load (1000kg)
Class III
PWM
External
Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX
Smart services:
Jiminy - Push Notification

Finishes



01 White



15 Grey



04 Black



F5 Rust brown

reddot winner 2023
best of the best

Other awards
Grand Prix du Design (Gold) 2024
BrightStar Award 2024


Visit our website for more information

LUN-UP EVO

design Dean Skira



Villa Brattlie - Nesøya, Norway — Product: Lun-Up Evo
Ph: Tomasz Majewski



IN-GROUND

3000K | 4000K

307×57×63 mm

up to 1007lm

up to 109lm/W

F | WF

CRI80

3000K | 4000K

CRI80

IP67 | IK08

Class III

24Vdc

Resistance to static load (1500kg)

Mounting accessories
to be ordered separately


Finish

04
Black

Visit our website
for more information



RECESSED WALL LUMINARIES



412 | WALKY



414 | LIGHT UP ORBIT

416 | LINEALUCE 27




417 | LINEALUCE 47

WALKY

design iGuzzini



Casa del Pino House – Tenerife, Spain — Product: Walky - square recessed | White
Ph: Roland Halbe



ROUND RECESSED

2700K | 3000K | 4000K
Ø200 | Ø100 | Ø50 mm
up to 524lm
up to 83lm/W
AL
CRI80



SQUARE RECESSED

2700K | 3000K | 4000K
180×180 | 90×90 | 45×45 mm
up to 524lm
up to 83lm/W
AL
CRI80



RECTANGULAR RECESSED

2700K | 3000K | 4000K
270×90 | 180×45 mm
up to 641lm
up to 77lm/W
AL
CRI80

Other versions available

Wall mounted luminaires p. 458

Bollards p. 434



Walky round wall mounted



Walky square wall mounted



Walky rectangular wall mounted



Walky round bollard



Walky square bollard



Walky rectangular bollard

2700K | 3000K | 4000K
CRI80
IP66 | IK08, IK09
Class I, II, III
ON/OFF
DALI-2
PWM
Mounting accessories to be ordered separately
Emergency version

Finishes



01
White



04
Black



15
Grey



F5
Rust brown

reddot winner 2018
best of the best

Other awards
Design Plus L+B 2018
Lighting Design Awards 2019
German Design Awards 2019

Visit our website for more information

LIGHT UP ORBIT

design iGuzzini



Kalbalce Factory - Khor Kalba-Sharjah, UA EBody in — Product: Light Up Orbit - Body in stainless steel | Ø80 mm
Ph: Phillip Handforth



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L

CRI80



BODY IN STAINLESS STEEL FLUSH

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L | E

CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm


up to 106lm/W

S | M | F | WF | WW | L | E

CRI80

Other versions available

Lighting effect luminaires p. 486 / Recessed ceiling luminaries p. 424 / Recessed wall luminaries p. 414



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III

Resistance to static load (2000kg)

Power supply
to be ordered separately

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Body Finish

13
Steel

Body Finishes flush

13
Steel

14
Gold

69
Bronze

E6
Burnished chrome

Body Finishes all glass flush

13
Steel

04
Black

Visit our website
for more information

LINEALUCE 27

design Jean-Michel Wilmotte



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K
39×69 mm
356 | 652 | 947 | 1243 | 1538 mm
up to 1960lm
up to 103lm/W
WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML |WGS - HC | WGM - HC | WGWF - HC | S | F | WF | E | GL No Dot | WG No Dot

Other versions available

Linear systems p. 370 / Ceiling mounted luminaires p. 472 / Recessed in-ground luminaries p. 406

Linealuce 27 surface Full Remote



Linealuce 27 pendant Full Remote

Linealuce 27 recessed Full Remote



Linealuce 27 span-wire

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K
CRI80
IP66, IP68 (1m) | IK09
Resistance to static load (1000kg)
Class III
PWM
External
Mounting accessories to be ordered separately
Power supplies to be ordered separately

Intelligent Light Solutions

Smart controls:

- Quick BLE (Casambi)
- Quick DALI
- Master Pro Evo

Smart services:

- Space management \| Push notification

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

reddot winner 2023 best of the best

Other awards
Grand Prix du Design (Gold) 2024
BrightStar Award 2024

Visit our website for more information

LINEALUCE 47

design Jean-Michel Wilmotte





RECESSED REMOTE
2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87×106 mm
340 | 610 | 907 | 1204| 1501 mm
up to 4260lm
up to 89lm/W
WGS | WGM | WGWF | WF
Through wiring
CRI80

RECESSED INTEGRAL
2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87×106 mm
340 | 610 | 907 | 1204| 1501 mm
up to 4260lm
up to 84lm/W
WGS | WGM | WGWF | WF
Through wiring
CRI80

Other versions available

Linear systems p. 372 / Ceiling mounted luminaires p. 471 / Recessed ceiling luminaries p. 423 / Recessed in-ground luminaries p. 404



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
CRI80
IP66, IP67 | IK06, IK10
Class II, III
Resistance to static load (2000kg)
DALI-2 | DMX-RDM
Mounting accessories to be ordered separately

Intelligent Light Solutions
Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Smart services:
Space management | Push notification

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

Visit our website for more information



RECESSED CEILING LUMINAIRES



420 | LASER BLADE INOUT

422 | LINEALUCE 27



423 | LINEALUCE 47



424 | LIGHT UP ORBIT



426 | IROUND

LASER BLADE INOUT

design iGuzzini



Villa Brattlie - Nesøya, Norway — Product: Laser blade InOut - Recessed | Grey / Black
Ph: Tomasz Majewski



RECESSED

2700K | 3000K | 4000K

83×49 | 158×49 | 291×49 | 423×49 mm

up to 2502lm

up to 88lm/W

S | F | WF

CRI90 | CRI95

Other versions available

Wall mounted luminaires p. 452



Laser blade
InOut wall

Ceiling mounted luminaires p. 468



Laser blade
InOut ceiling

2700K | 3000K | 4000K

CRI90 | CRI95

IP65 | IK06

Class II, III

DALI-2 | Remote power supply

Power supply
to be ordered separately

Frame for recessed flush mounted installation to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

43 Black/Black

47 White/Black

74 Grey/Black

I5 Rust brown/Black

S7 Black/Polished urban bronze

S8 Black/Shiny copper

S9 Black/Shiny sand

T0 Black/Shiny lead

T1 White/Polished urban bronze

T2 White/Shiny copper

T3 White/Shiny sand

T4 White/Shiny lead

T5 Grey/Polished urban bronze

T6 Grey/Shiny copper

T7 Grey/Shiny sand

T8 Grey/Shiny lead

T9 Rust brown/Polished urban bronze

U0 Rust brown/Shiny copper

U1 Rust brown/Shiny sand

U2 Rust brown/Shiny lead

Visit our website
for more information

LINEALUCE 27

design Jean-Michel Wilmotte



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

39×69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML |WGS - HC | WGM - HC | WGWF - HC | S | F | WF | E | GL No Dot | WG No Dot

CRI80

Other versions available

Linear systems p. 370 / Ceiling mounted luminaires p. 472 / Recessed in-ground luminaries p. 404

Linealuce 27 surface Full Remote



Linealuce 27 pendant Full Remote

Linealuce 27 recessed Full Remote



Linealuce 27 span-wire

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 (1m) | IK08, IK09

Resistance to static load (1000kg)

Class III

PWM

External

Mounting accessories to be ordered separately

Power supplies to be ordered separately

PEP ECOPASSPORT

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

reddot winner 2023 best of the best

Other awards

Grand Prix du Design (Gold) 2024

BrightStar Awards 2024

Visit our website for more information

LINEALUCE 47

design Jean-Michel Wilmotte





RECESSED REMOTE
2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87×106 mm
340 | 610 | 907 | 1204 | 1501 mm
up to 4260lm
up to 89lm/W
WGS | WGM | WGWF | WF
Through wiring
CRI80

RECESSED INTEGRAL
2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
87×106 mm
340 | 610 | 907 | 1204 | 1501 mm
up to 4260lm
up to 84lm/W
WGS | WGM | WGWF | WF
Through wiring
CRI80

Other versions available

Ceiling mounted luminaires p. 471

Recessed ceiling luminaires p. 423

Recessed wall luminaires p. 417



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral

Linear systems p. 372



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White
CRI80
IP66, IP67 | IK06, IK10
Class II, III
Resistance to static load (2000kg)
DALI-2 | DMX-RDM
Mounting accessories to be ordered separately

Intelligent Light Solutions
Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX
Smart services:
Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey



F5 Rust brown

Visit our website for more information

LIGHT UP ORBIT

design iGuzzini



Perelada Winery -Peralada, (Girona), Spain — Product: Light Up Orbit - Body in stainless steel | Diffusing Ø50 | Steel
Ph: Toti Ferrer - coutesy of Caves Perelada




BODY IN STAINLESS STEEL

2700K | 3000K | 4000K
Ø28 | Ø50 | Ø80 mm
up to 587lm
up to 106lm/W
S | M | F | WF | WW | D | L
CRI80



BODY IN STAINLESS STEEL FLUSH

2700K | 3000K | 4000K
Ø28 | Ø50 | Ø80 mm
up to 587lm
up to 106lm/W
S | M | F | WF | WW | D | L | E
CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH

2700K | 3000K | 4000K
Ø28 | Ø50 | Ø80 mm
up to 587lm
up to 106lm/W
S | M | F | WF | WW | L | E
CRI80

Other versions available

Lighting effect luminaires p. 486 / Recessed ceiling luminaires p. 424 / Recessed wall luminaires p. 414



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush

2700K | 3000K | 4000K
CRI80
IP66, IP68, IP68 (10m) | IK07, IK09
Class III
Resistance to static load (2000kg)
Remote power supply
Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Jiminy - Push Notification

Body Finish

13 Steel

Body Finishes flush

13 Steel
14 Gold
69 Bronze
E6 Burnished chrome

Body Finishes all glass flush

13 Steel
04 Black

Visit our website for more information

IROUND

design Maurizio Varratta



Istanbul Modern Museum - Istanbul, Turkey — Product: iRound - Fixed optic | Ø140 mm | Grey
Ph: Cemal Emden



RECESSED OUTDOOR DOWNLIGHTS

3000K | 4000K

Ø140 | Ø228 mm

up to 3136lm

up to 120lm/W

S | M | F | WF | WW



RECESSED OUTDOOR DOWNLIGHTS

3000K | 4000K

Ø140 | Ø128 mm

up to 3768lm

up to 110lm/W

M | F | WF

3000K | 4000K

CRI80

IP66 | IK07

Class II

DALI-2

Finishes

15
Grey

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Visit our website
for more information



BOLLARDS



430 | IWAY



432 | LANDER



434 | WALKY



436 | RIBEIRA



438 | GENEA




439 | FLYN



439 | DOMY



440 | PALCO INOUT BOLLARD



442 | TYPHA

IWAY

design Jean-Michel Wilmotte



HimmerLand Resort - Farsø, Denmark — Product: iWay - h=1000mm | Super Comfort Round | Black
Ph: Tomasz Majewski



BOLLARD ROUND

3000K | 4000K
Ø170 mm | Ø90 mm
h= 250 | 610 | 1000 mm
up to 1269lm
up to 102lm/W
360°
CRI80



BOLLARD SUPER COMFORT ROUND

3000K | 4000K
Ø180
h= 169 | 529 | 919 mm
up to 714lm
up to 54lm/W
360° | 180°
CRI80



BOLLARD SQUARE

3000K | 4000K
170×170 mm | 90×90 mm
h= 250 | 610 | 1000 mm
up to 1161lm
up to 93lm/W
360°
CRI80



BOLLARD SUPER COMFORT SQUARE

3000K | 4000K
180×180
h= 169 | 529 | 919 mm
up to 609lm
up to 44lm/W
360° | 180°
CRI80



VELVET

2200K | 2700K | 3000K | 4000K
Ø180 mm
h= 300 | 600 | 1000 mm
up to 715lm
up to 85lm/W
360° | 180°
CRI80
Dark sky



VELVET

2200K | 2700K | 3000K | 4000K
Ø180 mm
h= 300 | 600 | 1000 mm
up to 715lm
up to 85lm/W
360° | 180°
CRI80



RETROFIT KIT - ROUND BOLLARD

3000K | 4000K
Retrofit Optics: Ø167 mm
Retrofit Cover: Ø170 mm
Retrofit Pole: Ø170×599 mm | Ø170×899 mm
Retrofit Base: Ø162×40 mm
up to 1269lm
up to 102lm/W
360°
CRI80



RETROFIT KIT - SQUARE BOLLARD

3000K | 4000K
Retrofit Optics: 167×167 mm
Retrofit Cover: 170×170 mm
Retrofit Pole: 170×170×599 mm | 170×170×899 mm
Retrofit Base: 162×162×40 mm
up to 1161lm
up to 93lm/W
360°
CRI80



RETROFIT KIT - ROUND SUPER COMFORT BOLLARD

3000K | 4000K
Retrofit Optics: Ø180 mm
Retrofit Pole: Ø171×529 mm | Ø171×919 mm
Retrofit Base: Ø162×40 mm
up to 714lm
up to 54lm/W
360° | 180°
CRI80



RETROFIT KIT - SQUARE SUPER COMFORT BOLLARD

3000K | 4000K
Retrofit Optics: 180×180 mm
Retrofit Pole: 171×171×529 mm | 171×171×919 mm
Retrofit Base: 162×162×40 mm
up to 609lm
up to 44lm/W
360° | 180°
CRI80

2200K | 2700K | 3000K | 3500K | 4000K
CRI80
IP66 | IK10
Class II
ON/OFF | DALI-2
Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Jiminy - Push Notification

Finshes

01 White
04 Black
15 Grey
F5 Rust brown
07 Green

Visit our website for more information

iWay Velvet available form June 2026

LANDER

design Piano Design



Pista 500 –Turin, Italy — Product: Lander - h=950mm | OpticA60 | Grey
Ph: Michele Nastasi





BOLLARD
2200K | 2700K | 3000K | 4000K
270×126 mm
h= 650 | 950 mm
up to 2000lm
up to 115lm/W
A60 | ST1
CRI80

BOLLARD VERTICAL LIGHT
3000K
270×126 mm
h=950 mm
up to 1903lm
up to 108lm/W
AL | AT
CRI80

Other versions available

Wall mounted luminaires p. 456

Pole p. 310



Lander wall mounted



Lander Pole h=2.5 m



Lander Pole h=4 m

2200K | 2700K | 3000K | 4000K
CRI80
IP66 | IK09
Class II
DALI-2

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:

Jiminy - Push Notification

Finshes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- 07 Green

reddot winner 2017
best of the best

Other awards
German Design Award 2019

Visit our website for more information

WALKY

design iGuzzini



Tower of Barì lighting – Nuoro, Italy — Product: Walky - Rectangular bollard| h=600 | Rust brown
Ph: Stefano Ferrando, Studio Vetroblu



ROUND BOLLARD

2700K | 3000K | 4000K

Ø200 | Ø100 | Ø50 mm
h= 600 | 900 mm


up to 448lm

up to 39lm/W

AL

Outgoing cable

CRI80



SQUARE BOLLARD

2700K | 3000K | 4000K

180×180 | 90×90 | 45×45 mm
h= 600 | 900 mm


up to 448lm

up to 39lm/W

AL

Outgoing cable

CRI80



RECTANGULAR BOLLARD

2700K | 3000K

270×90 | 180×45 mm
h= 400 | 600 mm

up to 336lm

up to 28lm/W

AL

Outgoing cable

CRI80

Other versions available

Wall mounted luminaires p. 458

Recessed wall luminaries p. 412



Walky round wall mounted



Walky square wall mounted



Walky rectangular wall mounted



Walky round bollard



Walky square bollard



Walky rectangular bollard

2700K | 3000K | 4000K

CRI80

IP66 | IK08, IK09

Class I, II, III

ON/OFF | DALI-2 | PWM

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finshes

01
White

04
Black

15
Grey

F5
Rust brown

reddot winner 2018
best of the best

Other awards
Design Plus L+B 2018
Lighting Design Awards 2019
German Design Awards 2019

Visit our website
for more information

RIBEIRA

design David Chipperfield





RIBEIRA BOLLARD

2700K | 3000K | 3500K | 4000K

Ø150
h=600 | 900 mm

up to 820lm

up to 105lm/W

AF | AS | No Dot

CRI80

Other versions available

Wall mounted luminaires p. 448



Ribeira wall mounted

Ceiling mounted luminaires p. 466



Ribeira ceiling mounted

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06

Class II

Casambi

DALI-2

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finshes

01
White

04
Black

15
Grey

F5
Rust brown

07
Green

Red clay

Visit our website
for more information

GENEA

design Piano Design



GENEA

2200K | 2700K | 3000K

Ø200
h=325 | 575 | 895 mm

up to 700lm

up to 55lm/W

360°| 180°

CRI80

2200K | 2700K | 3000K

CRI80

IP66 | IK06

Class I, II

Casambi

DALI-2

Power supply
to be purchased separately

Mounting accessories
to be ordered separately

Finshes

01
White

04
Black

15
Grey

F5
Rust brown

07
Green

Visit our website
for more information

Genea available from
November 2026

DOMY

design iGuzzini



2700K | 3000K | 4000K

Ø210 mm
h=250 | 600 |1000 mm

up to 900lm

up to 90lm/W

360°

CRI80

IP65 | IK08

Class II

ON/OFF

Finshes

04
Black

07
Green

Visit our website
for more information

Domy available from
July 2026

FLYN

design iGuzzini



2700K | 3000K | 4000K

Ø180 mm
h=250 | 600 |1000 mm

up to 900lm

up to 90lm/W

360°

CRI80

IP65 | IK08

Class II

ON/OFF

Finshes

04
Black

07
Green

Visit our website
for more information

Flyn available from
July 2026

PALCO INOUT BOLLARD

design Artec Studio



BOLLARD Ø30 MM
2700K | 3000K | 4000K
h= 300 | 600 | 900 mm
up to 189lm
up to 75lm/W
S | M
CRI80



FRAMER BOLLARD Ø30 MM
2700K | 3000K | 4000K
h= 300 | 600 | 900 mm
up to 6lm
up to 2lm/W
Framer
CRI80



BOLLARD Ø49 MM
2700K | 3000K | 4000K
h= 300 | 600 | 900 mm
up to 518lm
up to 85lm/W
S | M | WF
CRI80

Other versions available

Floodlights p. 386



Palco InOut
Ø30 mm



Palco InOut
Ø30 mm



Palco InOut
Ø49 mm



Palco InOut
Ø83 mm



Palco InOut
Ø119 mm



Palco InOut
Ø116 mm



Palco InOut
Ø137 mm



Palco InOut
Ø153 mm



Palco InOut



Palco InOut
Framer Ø153 mm

Pole and wall mounted multiple floodlights p. 348



Multi Palco
InOut on pole



Multi Palco
InOut wall
mounted



Multi Palco
InOut with
minimal and
connected pole

2700K | 3000K | 4000K

CRI80

IP66 | IK07

Class III

Casambi

DALI-2

Power supplies
to be ordered separately

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finshes



01
White



04
Black



15
Grey



F5
Rust brown



07
Green

Lux Awards 2019
Premims Delta Bronzo 2020

Visit our website
for more information


Palco InOut: bollard
available from
April 2026

TYPHA

design Susana Jelen-Eduardo Leira



Office building – Nanterre, France — Product: Typha
Ph: Luc Boegly



BOLLARD FOR RESIDENTIAL AREAS

4000K

Ø15 mm | h= 1000 | 1300 | 1500 mm

up to 50lm

up to 14lm/W

D

CRI80

4000K

CRI80

IP66, IP67 | IK07

Class II, III

Power supplies
to be ordered separately

Mounting accessories to be ordered separately

Finsh

13
Steel

Visit our website
for more information



WALL MOUNTED LUMINAIRES



446 | TRICK



448 | RIBEIRA



450 | ALLURE




452 | LASER BLADE INOUT



454 | IPRO



456 | LANDER



458 | WALKY



460 | MOONLET



461 | CRYSO

TRICK

design Dean Skira



Castello al Monte - San Severino Marche, Italy — Product: Trick - Trick180°| Blade effect| Grey
Ph: Studio Buschi



EM
3000K
Ø110×166 mm
up to 66.6lm
up to 5lm/W
360° Blade optic (divided in ten sectors that can be controlled separately)
CRI80



360° AND LIGHT BLADE EFFECT
3000K | RGB
Ø89×140| Ø124×164 mm
up to 180lm
up to 19lm/W
360° Blade optic | L/L
CRI80



RADIAL
3000K
Ø110×42| Ø110×75 | Ø160×85 mm
up to 528lm
up to 38lm/W
R360°
CRI80



180°
3000K
Ø89×57 | Ø110×89 mm
up to 150lm
up to 33lm/W
L180°
CRI80



Other versions available

Ceiling mounted luminaires p. 464 / Lighting effect luminaries p. 478



Trick em



Trick 360° and light blade effect



Trick radial



Trick 180°



Trick washer

WASHER

3000K
Ø89×57 | Ø110×89 mm
up to 191lm
up to 49lm/W
W
CRI80

3000K | RGB
CRI80
IP20, IP66 | IK07
Class II | Class III
DMX-RDM
Mounting accessories to be purchased separately
Power supply to be purchased separately

Intelligent Light Solutions

Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX

Smart services:
Jiminy - Push Notification

Finishes



01
White



04
Black



15
Grey



F5
Rust brown

Other colors on request



E4
White/Chrome



E5
White/Grey







reddot winner 2015
best of the best



reddot winner 2025
best of the best

Other awards:
Compasso d'Oro Menzione d'Onore 2016
Win World Interiors Awards 2014
Premis Delta ORO 2014
Lux Awards 2014
Lighting Design Award 2015
Light Middle East Award: Outdoor Lighting
Product of the Year 2025
Grand Prix du Design 2025



Visit our website
for more information

RIBEIRA

design David Chipperfield





Ø150 WALL MOUNTED

2700K | 3000K | 3500K | 4000K

Flush | Frame

Black Transparent |
White Transparent | Opal

up to 820lm

up to 110lm/W

GL | No Dot

CRI80

Other versions available

Bollards p. 436



Ceiling mounted luminaires p. 466



2700K | 3000K | 3500K | 4000K

CRI80

IP66 | (Ø150 mm) IK06

Flush | Frame

Class I

DALI-2 | Casambi

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

01
White

04
Black

15
Grey

F5
Rust brown

07
Green

Red clay

Visit our website
for more information

ALLURE

design iGuzzini



Private residence -Arcevia, Italy — Product: Allure - 120×250 mm | Optic AF/AF | Green
Ph: Fabio Di Carlo



120×150 mm
2700K | 3000K | 3500K | 4000K
up to 1570lm
up to 120lm/W
AF | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS
CRI80



120×250 mm
2700K | 3000K | 3500K | 4000K
up to 2456lm
up to 126lm/W
AF-DOWN | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS
CRI80



GRAPHIC 120×150 mm
2700K | 3000K | 3500K | 4000K
up to 425lm
up to 42lm/W
L up | L down | ADJ Beam Up | ADJ Beam Down | L/ADJ Beam | ADJ Beam / L | L/L | ADJ Beam / ADJ Beam
CRI80



SMART 120×150 mm
2700K | 3000K | 3500K | 4000K
up to 1570lm
up to 113lm/W
AF | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS
CRI80



SMART 120×250 mm

2700K | 3000K | 3500K | 4000K

up to 2456lm

up to 126lm/W

AF-DOWN | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS

CRI80

Other versions available

Lighting effect luminaires p. 480



120×250 mm
Lighting effect

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06

Class I, II

ON/OFF

Casambi

DALI-2

HF Motion | HF Motion Casambi

Lower raster
to be purchased separately

Polycarbonate flush-mounted
cover 150×79 mm

Carter with visible edge
in polycarbonate 150×79 mm

Casing with visible edge
in PMMA 150×79 mm

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

HF Motion (Plug&Play)

HF Motion Casambi (Progra mmable)

Smart services:

Jiminy - Push Notification

Body Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- 07 Green

Raster Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- 07 Green
- F7 Glossy copper
- H3 Glossy black
- M3 Glossy sand
- M4 Glossy lead
- M5 Glossy urban bronze
- I9 Satin transparent

reddot winner 2024
best of the best

DESIGN AWARD 2024

Other awards
Grand Prix du Design 2024
Good Design 2024

Visit our website
for more information

LASER BLADE INOUT

design iGuzzini



Royal Opera House –London, United Kingdom — Product: Laser blade InOut
Ph: James Newton



INOUT WALL

2700K | 3000K | 4000K

83×66×102 | 158×66×102 mm

up to 669lm

up to 56lm/W

WF

CRI90 | CRI95

Other versions available

Recessed ceiling luminaries p. 420



Ceiling mounted luminaires p. 468



2700K | 3000K | 4000K

CRI90 | CRI95

IP65 | IK06

Class I

Remote power supply

Power supply
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

43
Black/Black

47
White/Black

74
Grey/Black

I5
Rust brown/Black

S7
Black/Glossy
urban bronze

S8
Black/Glossy copper

S9
Black/Glossy sand

T0
Black/Glossy lead

T1
White/Glossy
urban bronze

T2
White/Glossy copper

T3
White/Glossy sand

T4
White/Glossy lead

T5
Grey/Glossy
urban bronze

T6
Grey/Glossy copper

T7
Grey/Glossy sand

T8
Grey/Glossy lead

T9
Rust brown/Glossy
urban bronze

U0
Rust brown/Glossy
copper

U1
Rust brown/Glossy sand

U2
Rust brown/Glossy lead

Visit our website
for more information

IPRO

design Mario Cucinella



Private residence in Neuilly-sur-Seine -France — Product: iPro | wall mounted | Up/down light | Grey
Ph: Didier Boy de la Tour



51 mm WALL MOUNTED
3000K | 4000K
51×51×56 | 51×51×161 mm
up to 221lm
up to 49lm/W
VWF | L | L/VWF | VWF/VWF | L/L
CRI80



81 mm WALL MOUNTED
3000K | 4000K
up to 494lm
up to 64lm/W
F | VWF | L
CRI80



132 mm WALL MOUNTED
3000K | 4000K
up to 1522lm
up to 109lm/W
S | M | F | VWF | WF
CRI80



155 mm WALL MOUNTED
3000K | 4000K | Tunable white
up to 2457lm
up to 97lm/W
VWF | WF
CRI80



192 mm WALL MOUNTED

3000K | 4000K | RGB | Tunable white

up to 6609lm

up to 111lm/W

S | M | F | VWF | WF

2 PG

CRI80

Other versions available

Floodlights p. 392



iPro 51 mm



iPro 81 mm



iPro 132 mm



iPro 155 mm



iPro 192 mm

Ceiling mounted luminaires p. 474



iPro 51×51 mm ceiling mounted



iPro 81×81 mm ceiling mounted



iPro 132×132 mm ceiling mounted



iPro 155×155 mm ceiling mounted



iPro 192×192 mm ceiling mounted

Pole mounted multiple flood p. 354



Multi Pro on pole



MulitPro wall mounted



Multi Pro with minimal and connected pole

Lighting effect luminaires p. 482



iPro Wall Lighting effects

3000K | 4000K | RGB | Tunable white

CRI80

IP66 | IK07

Class I,II, III

ON/OFF

DALI-2

DMX-RDM

Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown


reddot winner 2017
best of the best

Other awards
German Design Award 2019

Visit our website for more information

LANDER

design Piano Design

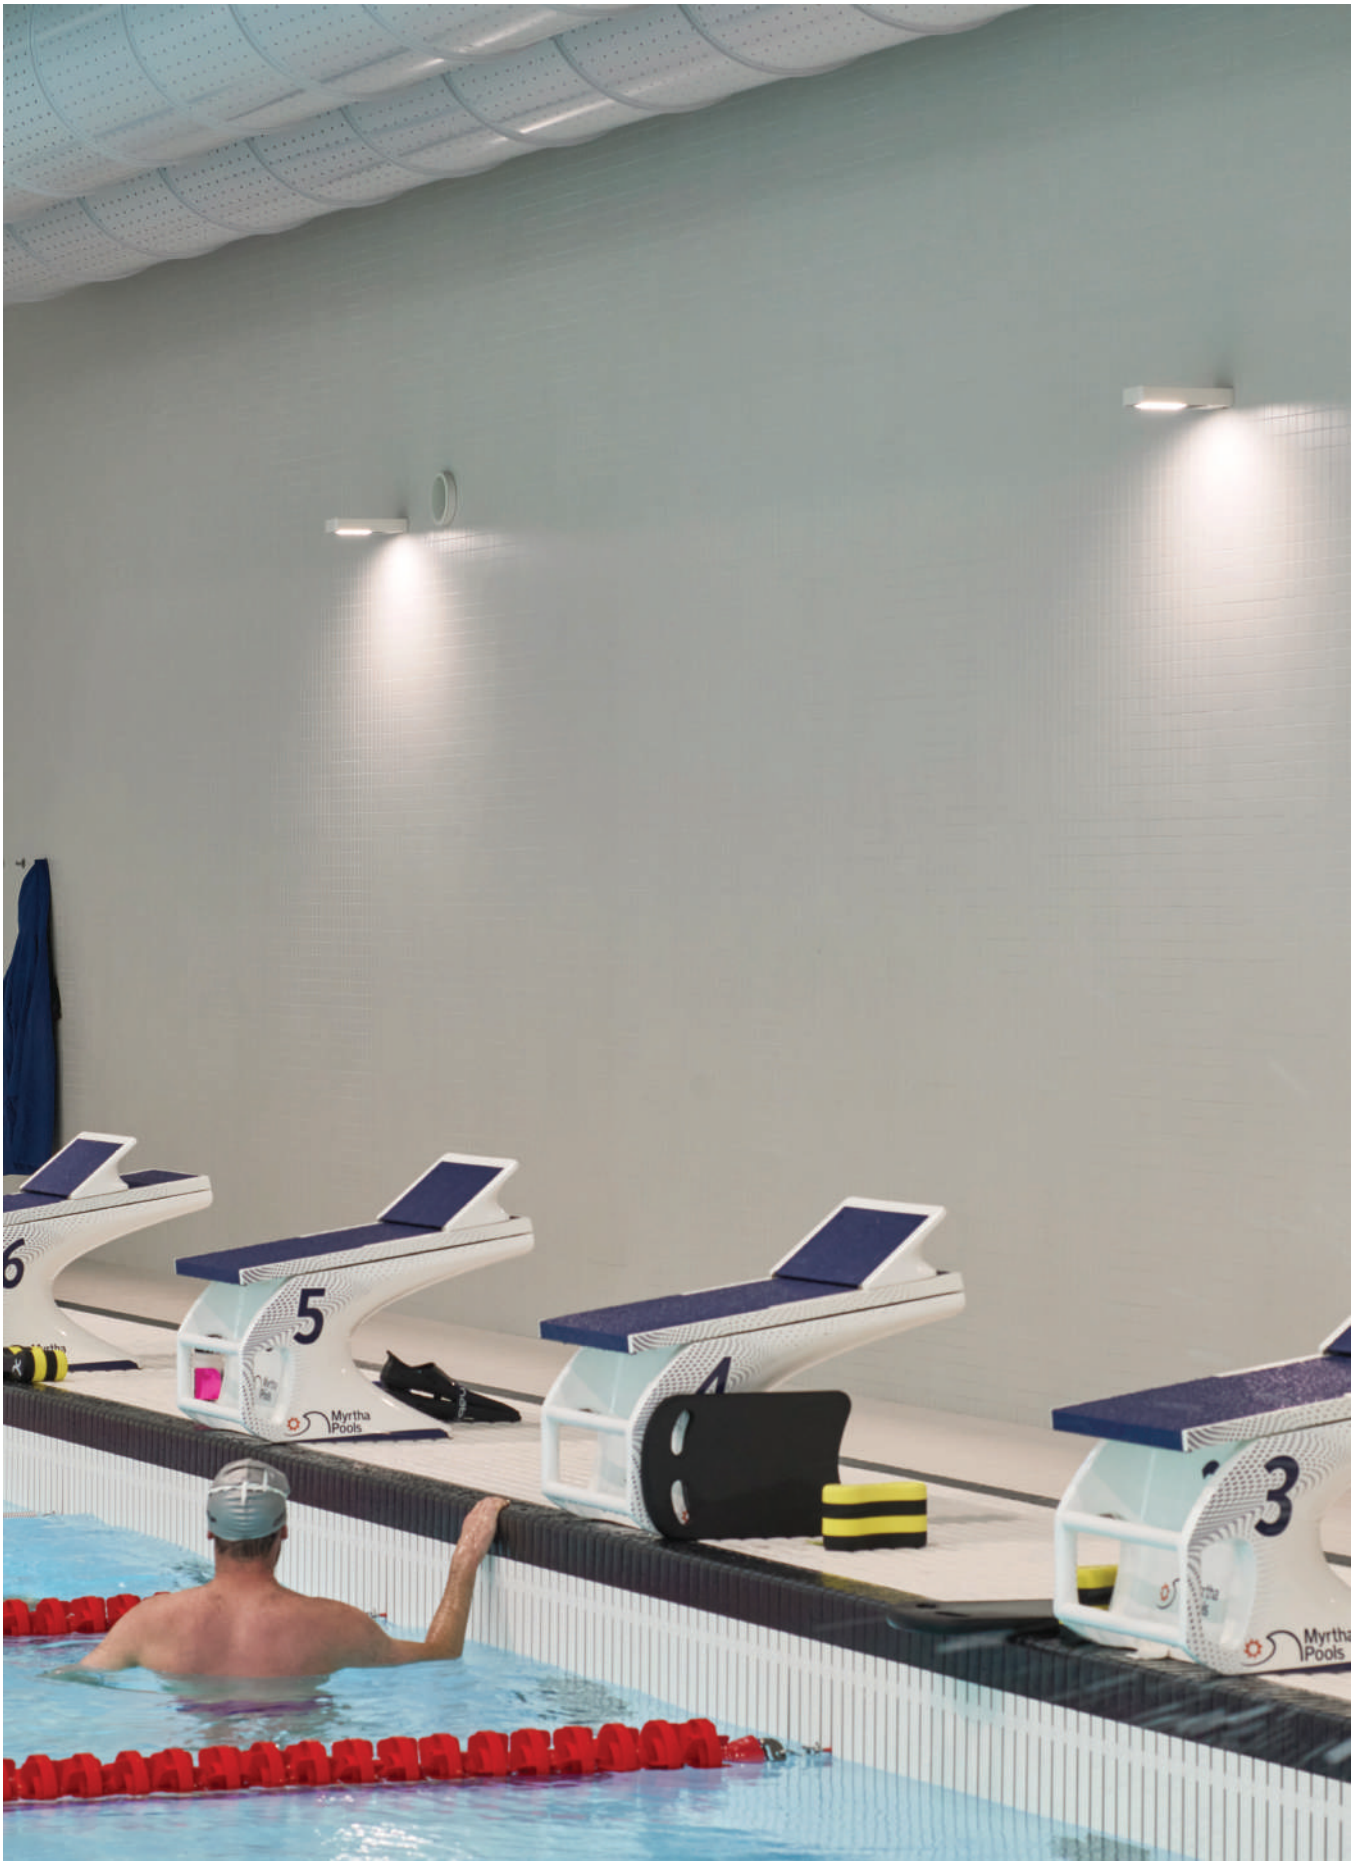

Club Virgin Active Milano Bocconi – Milan, Italy — Product: Lander - Longitudinal Asy mmetric Optic| White
Ph: Paolo Carlini



WALL

3000K

290×126×90 mm

up to 2278lm

up to 103lm/W

CRI80

Other versions available

Bollards p. 432

Pole p. 310



Lander bollard



Lander bollard vertical light



Lander on pole h =2.5 m



Lander on pole h =4 m

3000K

CRI80

IP66 | IK09

Class II

DALI-2

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

07 Green

reddot winner 2024
best of the best

Visit our website for more information

WALKY

design iGuzzini



Kalba Ice Factory - Khor Kalba, Sharjah, UAE — Product: Walky - Rectangular wall mounted| 270×90 mm | Grey
Ph: Phillip Handforth



ROUND WALL MOUNTED

2700K | 3000K | 4000K
Ø200 | Ø100 mm
up to 524lm
up to 90lm/W
AL
CRI80



SQUARE WALL MOUNTED

2700K | 3000K | 4000K
180×180×45 | 90×90×90 mm
up to 524lm
up to 90lm/W
AL
CRI80



RECTANGULAR WALL MOUNTED

2700K | 3000K | 4000K
270×36 | 60×270 mm
up to 640lm
up to 77lm/W
AL
CRI80

Other versions available

Bollards p. 434

Recessed wall luminaires p. 412



Walky round bollard



Walky square bollard



Walky rectangular bollard



Walky round wall mounted



Walky square wall mounted



Walky rectangular wall mounted

2700K | 3000K | 4000K
CRI80
IP66 | IK08, IK09
Class I, II, III
ON/OFF
DALI-2
PWM
Mounting accessories to be purchased separately

Finishes



01 White



04 Black



15 Grey



F5 Rust brown

reddot winner 2018
best of the best

Other awards
Design Plus L+B 2018
Lighting Design Awards 2019
German Design Awards 2019

Intelligent Light Solutions

Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo

Smart services:
Jiminy - Push Notification

Visit our website for more information

MOONLET

design iGuzzini



MOONLET

3000K | 4000K

Ø240 | 350 mm

up to 3200lm

up to 110lm/W

GL

CRI80

DALI-2

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK07

Class II

DALI-2

Finishes

01
White

04
Black

F5
Rust brown

Intelligent Light Solutions

Smart controls:

Master Pro Evo

Quick BLE

Quick DALI

Smart services:

Jiminy - Push Notification

Visit our website
for more information

Moonlet available from
November 2026

CRYSO

design Alessandro Scandurra



CRYSO

2700K | 3000K | 3500K | 4000K

Ø163 mm

up to 250lm

up to 23lm/W

R360°

CRI80

Other versions available

Ceiling mounted luminaires p. 470



Cryso ceiling



Cryso pendant

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK07

Class II

DALI-2

Mounting accessories for pendant installation to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

01
White

04
Black

15
Grey

F5
Rust brown

07
Green

Visit our website for more information

Cryso available from March 2026



CEILING MOUNTED LUMINAIRES



464 | TRICK



466 | RIBEIRA



468 | LASER BLADE INOUT



470 | CRYSO



471 | LINEALUCE 47



472 | LINEALUCE 27



474 | IPRO

TRICK

design Dean Skira



Old Town of Paphos - Paphos, Cyprus — Product: Trick - Trick 360°and light blade effect | Grey
Ph: Maria Efthymiou - Creative Photo Room



EM
3000K
Ø110 × 166 mm
up to 66lm
up to 5lm/W
360° Blade optic (divided in ten sectors that can be controlled separately)
CRI80



360° AND LIGHT BLADE EFFECT
3000K | RGB
Ø89×140 mm | Ø124×164 mm
up to 180lm
up to 19lm/W
360° Blade optic | L/L
CRI80



RADIAL
3000K
Ø110×42 | Ø110×75 | Ø160×85 mm
up to 528lm
up to 38lm/W
R360°
CRI80



180°
3000K
Ø89×57 mm | Ø110×89 mm
up to 150lm
up to 33lm/W
L180°
CRI80



WASHER

3000K

Ø89×57 mm | Ø110×89 mm

up to 191lm

up to 49lm/W

W

CRI80

Other versions available

Wall mounted luminaires p. 446



Trick em



Trick 360° and light blade effect



Trick radial



Trick 180°



Trick washer

Lighting effect luminaires p. 478



Trick em



Trick 360° and light blade effect



Trick radial



Trick 180°



Trick washer

3000K | RGB

CRI80

IP20, IP66 | IK07

Class II, III

DMX-RDM

Mounting accessories to be ordered separately

Power supply to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey



F5 Rust brown

reddot winner 2015 best of the best

reddot winner 2025 best of the best

Other awards:
Compasso d'Oro Menzione d'Onore 2016
Win World Interiors Awards 2014
Premis Delta ORO 2014
Lux Awards 2014
Lighting Design Award 2015
Light Middle East Award: Outdoor Lighting Product of the Year 2025
Grand Prix du Design 2025

Visit our website for more information

RIBEIRA

design David Chipperfield





Ø150 CEILING MOUNTED

2700K | 3000K | 3500K | 4000K

Flush | Frame

Black Transparent |
White Transparent | Opal

up to 820lm

up to 110lm/W

GL | No Dot

CRI80



Ø210 CEILING MOUNTED

2700K | 3000K | 3500K | 4000K

Flush | Frame

Black Transparent | White Transparent

up to 2250lm

up to 110lm/W

M | F | WF

CRI80

Other versions available

Bollards p. 436

Wall mounted luminaires p. 448





2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06 (Ø150 mm)

IP66 | IK08 (Ø210 mm)

Flush | Frame

Class I, II

DALI-2 | Casambi

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

01
White

04
Black

15
Grey

F5
Rust brown

07
Green

Red clay

Visit our website
for more information

Cryso available from
March 2026

LASER BLADE INOUT

design iGuzzini



Amarbayasgalant Monastery - Baruun Buren, (Selenge Province), Mongolia — Product: Laser blade InOut - Ceiling-mounted |Wide Flood optic | Black / Black
Ph: Courtesy of NCD Group and Azzura Architects



CEILING

2700K | 3000K | 4000K

83×50×99 mm | 158×50×99 mm

up to 847lm

up to 71lm/W

S | F | WF

CRI90 | CRI95

Other versions available

Recessed ceiling luminaries p. 420



Laser blade
InOut recessed

Wall mounted luminaires p. 454



Laser blade
InOut wall

2700K | 3000K | 4000K

CRI90 | CRI95

IP65 | IK06

Class I

Remote power supply

Power supply to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

43 Black/Black

47 White/Black

74 Grey/Black

I5 Rust brown/Black

S7 Black/Glossed urban bronze

S8 Black/Glossed copper

S9 Black/Glossed sand

T0 Black/Glossed lead

T1 White/Glossed urban bronze

T2 White/Glossed copper

T3 White/Glossed sand

T4 White/Glossed lead

T5 Grey/Glossed urban bronze

T6 Grey/Glossed copper

T7 Grey/Glossed sand

T8 Grey/Glossed lead

T9 Rust brown/Glossed urban bronze

U0 Rust brown/Glossed copper

U1 Rust brown/Glossed sand

U2 Rust brown/Glossed lead

Visit our website for more information

CRYSO

design Alessandro Scandurra





CEILING
2700K | 3000K | 3500K | 4000K
Ø163 mm
up to 550lm
up to 50lm/W
M | F | VWF | 6L
CRI80

PENDANT
2700K | 3000K | 3500K | 4000K
Ø163 mm
up to 550lm
up to 50lm/W
M | F | VWF | 6L
CRI80

Other versions available

Wall mounted luminaires p. 461



2700K | 3000K | 3500K | 4000K
CRI80
IP66 | IK07
Class II
DALI-2
Mounting accessories for pendant installation to be ordered separately

Intelligent Light Solutions
Smart controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Smart services:
Jiminy - Push Notification

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- 07 Green

Visit our website for more information

Cryso available from March 2026

LINEALUCE 47

design Jean-Michel Wilmotte



SURFACE REMOTE
2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
47×83 mm
340 mm | 611 mm | 908 mm | 1205 mm| 1502 mm
up to 5530lm
up to 96lm/W
WGS | WGM | WGWF | S | F | WF
CRI80



SURFACE INTEGRAL
2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
47×83 mm
340 mm | 611 mm | 908 mm | 1205 mm| 1502 mm
up to 5530lm
up to 88lm/W
WGS | WGM | WGWF | S | F | WF
CRI80



SURFACE INTEGRAL SIDE BOX
2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White
102×52 mm
340 mm | 611 mm | 908 mm | 1205 mm| 1502 mm
up to 5146lm
up to 86lm/W
WGS | WGM | WGWF
CRI80

Other versions available

Linear systems p. 372 / Ceiling mounted luminaires p. 471 / Recessed ceiling luminaries p. 422 / Recessed wall luminaires p. 416



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White

CRI80

IP66, IP67 | IK05, IK06, IK10

Class II, III

Walkable (2000kg)

DALI-2 | DMX-RDM

Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

Visit our website for more information

LINEALUCE 27

design Jean-Michel Wilmotte





SURFACE FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625| 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

39×69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML |WGS - HC | WGM - HC | WGWF - HC | S | F | WF | E | GL No Dot | WG No Dot

CRI80



SPAN WIRE FULL REMOTE

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML | WGM - ML | WGWF - ML | S | F | WF | E | GL No Dot | WG No Dot

CRI80

Other versions available

Pendants p. 146 / Ceiling mounted luminaires p. 471 / Recessed in-ground luminaries p. 406

Linealuce 27 surface Full Remote



Linealuce 27 pendant Full Remote

Linealuce 27 recessed Full Remote



Linealuce 27 span-wire

2220K | 2700K | 3000K | 4000K | Tunable White | Tunable Warm | RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 | IK06, IK08, IK09

Walkable (1000kg)

Class III

PWM

Mounting accessories to be ordered separately

Power supplies to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

reddot winner 2023 best of the best

Other awards

Grand Prix du Design (Gold) 2024

BrightStar Award 2024

Visit our website for more information

IPRO

design Mario Cucinella



Public lighting in Mantua –Mantua, Italy — Product: iPro - Ceiling mounted |132 mm | Grey
Ph: Paolo Carlini



51×51 mm CEILING MOUNTED
3000K | 4000K
up to 348lm
up to 82lm/W
F
CRI80



81×81 mm CEILING MOUNTED
3000K | 4000K
up to 526lm
up to 68lm/W
F
CRI80



132×132 mm CEILING MOUNTED
3000K | 4000K
up to 1522lm
up to 109lm/W
WF | VWF
CRI80



155×155 mm CEILING MOUNTED
3000K | 4000K
up to 2040lm
up to 104lm/W
WF | VWF
CRI80



192×192 mm CEILING MOUNTED

3000K | 4000K

up to 3304lm

up to 124lm/W

F | WF

CRI80

Other versions available

Floodlights p. 392



iPro 51 mm



iPro 81 mm



iPro 132 mm



iPro 155 mm



iPro 192 mm

Wall mounted luminaries p. 454



iPro 51 mm wall mounted



iPro 81 mm wall mounted



iPro 132 mm wall mounted



iPro 155 mm wall mounted



iPro 192 mm wall mounted

Pole mounted multiple flood p. 354



Multi Pro on pole



Multi Pro wall mounted



Multi Pro with minimal and connected pole

Lighting effect luminaires p. 482



iPro Wall lighting effects

3000K | 4000K

CRI80

IP66 | IK07

Class I, II, III

ON/OFF | DALI-2 |

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

reddot winner 2024
best of the best

Visit our website for more information



LIGHTING EFFECT LUMINAIRES



478 | TRICK




480 | ALLURE



482 | IPRO



484 | UNDERSCORE INOUT



486 | LIGHT UP ORBIT



488 | NEWFO INOUT



489 | PALCO INOUT FRAMER

TRICK

design Dean Skira



The Backyard Hazmieh - Lebanon, United Arab Emirates — Product: Trick - Radial 360° effect | Grey
Ph: Ieva Saudargaitė



EM
3000K
Ø110×166 mm
up to 66lm
up to 6lm/W
360° Blade optic (divided in ten sectors that can be controlled separately)
CRI80



360° AND LIGHT BLADE EFFECT
3000K | RGB
Ø89×140 | Ø124×164 mm
up to 180lm
up to 20lm/W
360° Blade optic | L/L
CRI80



RADIAL
3000K
Ø110×42 | Ø110×75 | Ø160×85 mm
up to 528lm
up to 40lm/W
R360°
CRI80



180°
3000K
Ø89×57 | Ø110×89 mm
up to 150lm
up to 33lm/W
L180°
CRI80



WASHER

3000K
Ø89×57 | Ø110×89 mm
up to 192lm
up to 50lm/W
W
CRI80

Other versions available

Ceiling mounted luminaires p. 464 / Wall mounted luminaires p. 446



Trick em



Trick 360° and light blade effect



Trick radial



Trick 180°



Trick washer

3000K | RGB
CRI80
IP20, IP66 | IK07
Class II, III
DMX-RDM
Mounting accessories to be ordered separately
Power supply to be ordered separately

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown

Other colors on request

- E4 White/Chrome
- E5 White/Grey

Other awards:
Compasso d'Oro Menzione d'Onore 2016
Win World Interiors Awards 2014
Premis Delta ORO 2014
Lux Awards 2014
Lighting Design Award 2015
Light Middle East Award: Outdoor Lighting
Product of the Year 2025
Grand Prix du Design 2025

Intelligent Light Solutions

Smart Controls:
Quick BLE (Casambi)
Quick DALI
Master Pro Evo
Quick DMX
Master Pro DMX
Smart Services:
Jiminy - Push Notification

Visit our website for more information

ALLURE

design iGuzzini



Private residence - Arcevia, Italy — Product: Allure - 120×250 mm | Optic L/ADJ | Rust brown
Ph: Fabio Di Carlo



Other versions available

Lighting effect luminaires p. 481



Allure
120×150 mm



Allure
120×250 mm



Allure Smart
120×150 mm



Allure Smart
120×250 mm

GRAPHIC 120×150 MM

2700K | 3000K | 3500K | 4000K

up to 425lm

up to 43lm/W

L up | L down | ADJ Beam Up | ADJ Beam Down | L/ADJ Beam | ADJ Beam / L | L/L | ADJ Beam / ADJ Beam

CRI80



L
Down



L
Up



ADJ
Down



ADJ
Up



ADJ / L
Up/Down



L / ADJ
Up/ Down



L / L
Up/ Down



ADJ / ADJ
Up/ Down

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06

Class I

On/off

Lower raster to be ordered separately

Raster finishes



01
White



04
Black



07
Green



15
Grey



F5
Rust brown



F7
Shiny copper



H3
Shiny black



M3
Shiny sand



M4
Shiny lead



M5
Shiny urban bronze

H3
Satin trasparent

Body finishes



01
White



04
Black



07
Green



15
Grey



F5
Rust brown







Other awards
Grand Prix du Design 2024
Good Design 2024



Visit our website
for more information

IPRO

design Mario Cucinella



Private residence in Neuilly-sur Seine - France — Product: iPro -Ø51 mm | wall mounted | Up/down light | Grey
Ph: Didier Boy de la Tour



WALL MOUNTED LIGHTING EFFECTS
51×51×56 mm | 51×51×161 mm | 81×81×86 mm
3000K | 4000K
up to 221lm
up to 50lm/W
L | L/L | L/VWF | VWF/VWF
CRI80

Other versions available

Floodlights p. 392



iPro 51 mm



iPro 81 mm



iPro 132 mm



iPro 155 mm



iPro 192 mm

Wall mounted luminaries p. 454



iPro 51 mm wall mounted



iPro 81 mm wall mounted



iPro 132 mm wall mounted




iPro 155 mm wall mounted



iPro 192 mm wall mounted

Ceiling mounted luminaires p. 474



iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted

Pole and wall mounted multiple floodlights p. 354



Multi Pro on pole



Multi Pro wall mounted



Multi Pro with minimal and connected pole



L
Down



L
Up



L / L
Up/ Down



L / VWF
Up/ Down



VWF / VWF
Up/ Down

3000K | 4000K

CRI80

IP66 | IK07

Class II | Class III

ON/OFF | DALI-2

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart Services:

Jiminy - Push Notification

Finishes



01
White



04
Black



15
Grey



F5
Rust brown

reddot winner 2024
best of the best

Visit our website for more information

UNDERSCORE INOUT

design iGuzzini



Attocube Systems AG office building - Haar, Germany — Product: Underscore InOut - Top Bend 16 mm | RGB
Ph: Roland Halbe



SIDE BEND 10 MM

2600K | 2900K | 3700K | 4600K | RGB

L from 254 mm to 7004 mm

up to 3448lm

up to 73.5lm/W

GL

CRI80



SIDE BEND 16 MM

2600K | 2900K | 3700K | 4600K | RGB | Tunable white

L from 254 mm to 7004 mm

up to 3690lm

up to 78.6lm/W

GL

CRI80



TOP BEND 16 MM

2600K | 2900K | 3800K | 4600K | RGB | Tunable white


L from 254 mm to 7004 mm

up to 5601.2lm

up to 74.1lm/W

GL

CRI80



PIXEL TOP BEND 16 MM

RGBW

L from 337 mm to 7004 mm

up to 1.281lm

up to 25.6lm/W

GL (addressable every 83.3 mm)

Other versions available

Linear systems p. 374



Underscore InOut Side Bend 10 mm



Underscore InOut Side Bend 16 mm



Underscore InOut Top Bend 16 mm



Underscore InOut Top Bend 16 mm

2600K | 2900K | 3700K | 3800K | 4600K | RGB | Tunable White | RGB-W

CRI80

IP68 | IK10

Class III

PWM 24Vdc | SPI

Power supply to be purchased separately

Finishes

01
White

ArchiExpo i-NOVO Awards 2016

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart Services:

Jiminy - Push Notification

Visit our website for more information

LIGHT UP ORBIT

design iGuzzini



Cultural center of La Misericordia - Palma de Mallorca, Spain — Product: Light Up Orbit - Body in stainless steel | Ø50 | Steel
Ph: José Hevia



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 mm | Ø50 mm | Ø80 mm

up to 46lm

up to 11lm/W

L

CRI80



BODY IN STAINLESS STEEL FLUSH

2700K | 3000K | 4000K

Ø28 mm | Ø50 mm | Ø80 mm

up to 46lm

up to 11lm/W

L

CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH

2700K | 3000K | 4000K

Ø28 mm | Ø50 mm | Ø80 mm

up to 46lm

up to 11lm/W

L

CRI80

Other versions available

Recessed in-ground luminaries p. 486/ Recessed ceiling luminaires p. 424 / Recessed wall luminaires p. 414



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush



Light Up Orbit Body in stainless steel



Light Up Orbit Body in stainless steel flush



Light Up Orbit Body in stainless steel / all glass flush

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III

Resistance to static load (2000kg)

Power supply to be ordered separately

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart Services:

Jiminy - Push Notification

Body finishes

12
Steel

Body finishes flush

12
Steel

14
Gold

69
Bronze

E6
Burnished chrome

Body finishes all glass flush

04
Black

12
Steel

Visit our website for more information

NEWFO INOUT

design iGuzzini



Ø76 MM

2200K | 2700K | 3000K | 3500K | 4000K

up to 850 lm

up to 90lm/W

Blade

CRI80 | CRI90

CRI80



Ø98 MM

2200K | 2700K | 3000K | 3500K | 4000K


up to 1500lm

up to 100lm/W

Blade

CRI80 | CRI90

CRI80



Ø125 MM

2200K | 2700K | 3000K | 3500K | 4000K

up to 3000lm

up to 120lm/W

Blade

CRI80 | CRI90

CRI80

Other versions available

Floodlights p. 378



Newfo InOut Ø76 mm



Newfo InOut Ø98 mm



Newfo InOut Ø125 mm



Newfo InOut Ø125 mm



Newfo InOut Ø176 mm



Newfo InOut Ø205 mm

Pole and wall mounted multiple floodlights p. 344



Multi Newfo InOut on pole



Multi Newfo InOut wall mounted



Multi Newfo InOut with minimal and connected pole

3000K | 4000K | RGBW 4000K

CRI80

IP66, IP68 (10m) | IK10

Class II

Resistance to static load (5000kg)

DALI-2 | DMX-RDM

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart Services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown

07 Green

Visit our website for more information

PALCO INOUT FRAMER

design Artec Studio



Ø30 mm FRAMER

2700K | 3000K | 4000K

up to 6lm

up to 2lm/W

Framer

CRI80



Ø116 mm FRAMER

2700K | 3000K | 4000K

up to 1032lm

up to 30lm/W

Framer

CRI80



Ø153 mm FRAMER

3000K | 4000K

up to 1275lm

up to 20lm/W

Framer

CRI80

Other versions available

Floodlights p. 384



Palco InOut Ø30 mm



Palco InOut Ø49 mm



Palco InOut Ø83 mm



Palco InOut Ø119 mm



Palco InOut Ø137 mm



Palco InOut Ø153 mm

Pole and wall mounted multiple floodlights p. 348 / Bollards p. 440



Multi Palco InOut on pole



Multi Palco InOut wall mounted



Multi Palco InOut with minimal and connected pole



Palco InOut bollard

2700K | 3000K | 4000K

CRI80

IP66, IP68 (10m) | IK10

Class II

Resistance to static load (5000kg)

DALI-2 | DMX-RDM

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart Services:

Jiminy - Push Notification

Finishes

01 White

04 Black

15 Grey

F5 Rust brown


07 Green

Visit our website for more information



INTELLIGENT LIGHT SOLUTIONS


SMART CONTROLS



492 | ORGANIC RESPONSE



494 | QUICK BLE



496 | MASTER PRO EVO KNX



498 | QUICK DALI



500 | MASTER PRO DMX




502 | QUICK DMX

SMART SERVICES



504 | SPACE MANAGEMENT



506 | JIMINY - PUSH NOTIFICATION


ORGANIC RESPONSE




Organic Response Technology
Wireless
IR + BLE + Wirepas protocol
Mesh Network
Plug&Play - No Commissioning
Customisable via Organic Response Express app
Cloud for Data Analytics
Energy consumption measurement
Scheduler and Human Centric Lighting
Occupancy information on maps
Multiple users with different privileges
Integrated beacon
Integration into Building Management System via API
Scalable system
Ideal for working

Visit our website
for more information

Organic Response
available from
April 2026

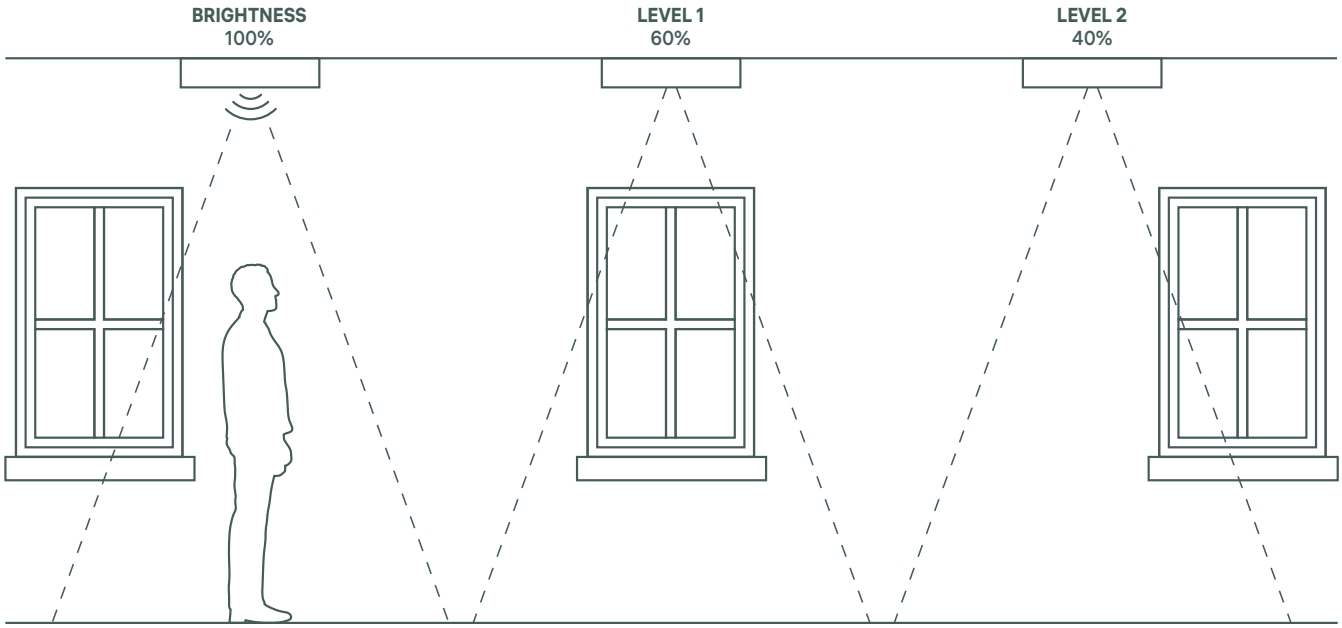

MULTISENSOR FOR MV TRACK



EXTERNAL MULTISENSOR



WIRELESS KEYPAD




APP




GATEWAY




DASHBOARD




PRODUCT WITH ORGANIC RESPONSE MULTISENSOR



SPACEPAD



LIGHT SHED 14



IN 60 EVO



LIBERA



IPLAN NEXT

OTHERS

PRODUCTS CONTROLLABLE VIA EXTERNAL INTERFACE AND BINARY INPUT

DALI

ALL IGUZZINI DALI PRODUCTS

QUICK BLE




San Rocco Complex - San Giovanni Teatino, Italy
Ph: Fabio Di Carlo


Quick BLE
Wireless
Bluetooth Casambi protocol
Mesh Network
Control via smartphone through the Casambi app
Creation of groups and scenes
Scheduler
Circadian cycles
Integration into BMS via API
FW update via OTA
Self-healing network
Future proof
Easy to retrofit
Energy saving
Ideal for Hospitality & Living and Museum applications

Visit our website
for more information


Quick BLE Casambi: box poles available from April 2026

MAIN FEATURES

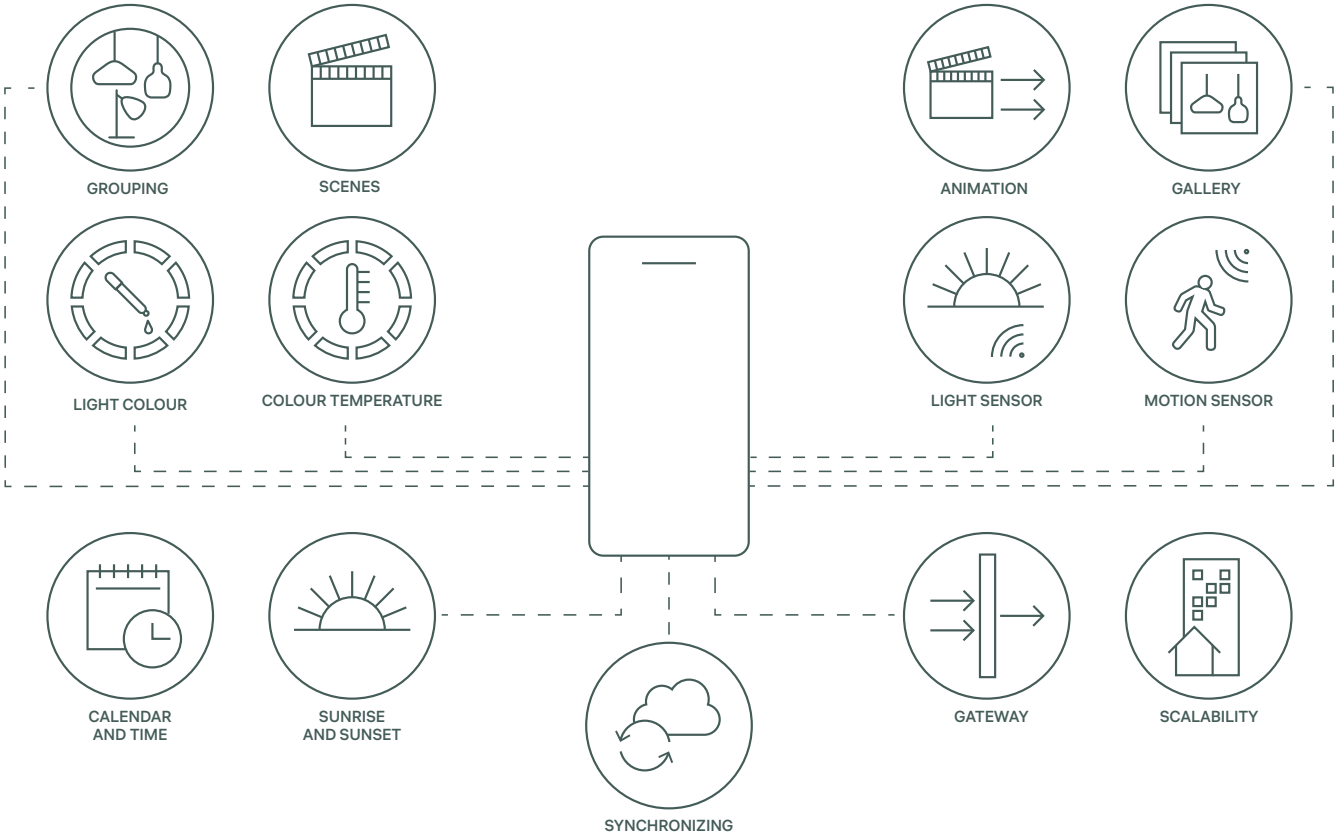





EXTERNAL INTERFACE
16/32 DALI ADDRESSES
RECESSED




EXTERNAL INTERFACE
1-4 DALI ADDRESSES /BROADCAST
RECESSED



TRACK INTERFACE
16/32 DALI ADDRESSES
MV TRACK



TRACK SENSOR
LUX E MOTION
MV TRACK



TRACK SENSOR
LUX E MOTION
LV TRACK




PULSANTIERA WIRELESS
PULSANTI PROGRAMMABILI
NO BATTERY




CASAMBI APP


CASAMBI PRODUCTS




LIGHT SHED 14




PALCO PRO



PALCO MV
PALCO LV




IN 60 EVO




SIPARIO



IPLAN NEXT



LANDER




LIBERA SYSTEM



ALLURE



LASER BLADE XS



ROBIN



LASER
LASER EVO



SPACEPAD

PRODUCTS CONTROLLABLE VIA EXTERNAL INTERFACE AND BINARY INPUT

DALI

ALL IGUZZINI DALI PRODUCTS


MASTER PRO EVO




MOL Campus - Budapest, Hungary
Ph: HGEsch Photography

Master Pro EVO
Wired
KNX/DALI Protocol
Integrable with Building Management Systems (BMS)
International standard
Interoperability
Automation and comfort
Energy efficiency
Emergency DALI monitoring

Visit our website
for more information

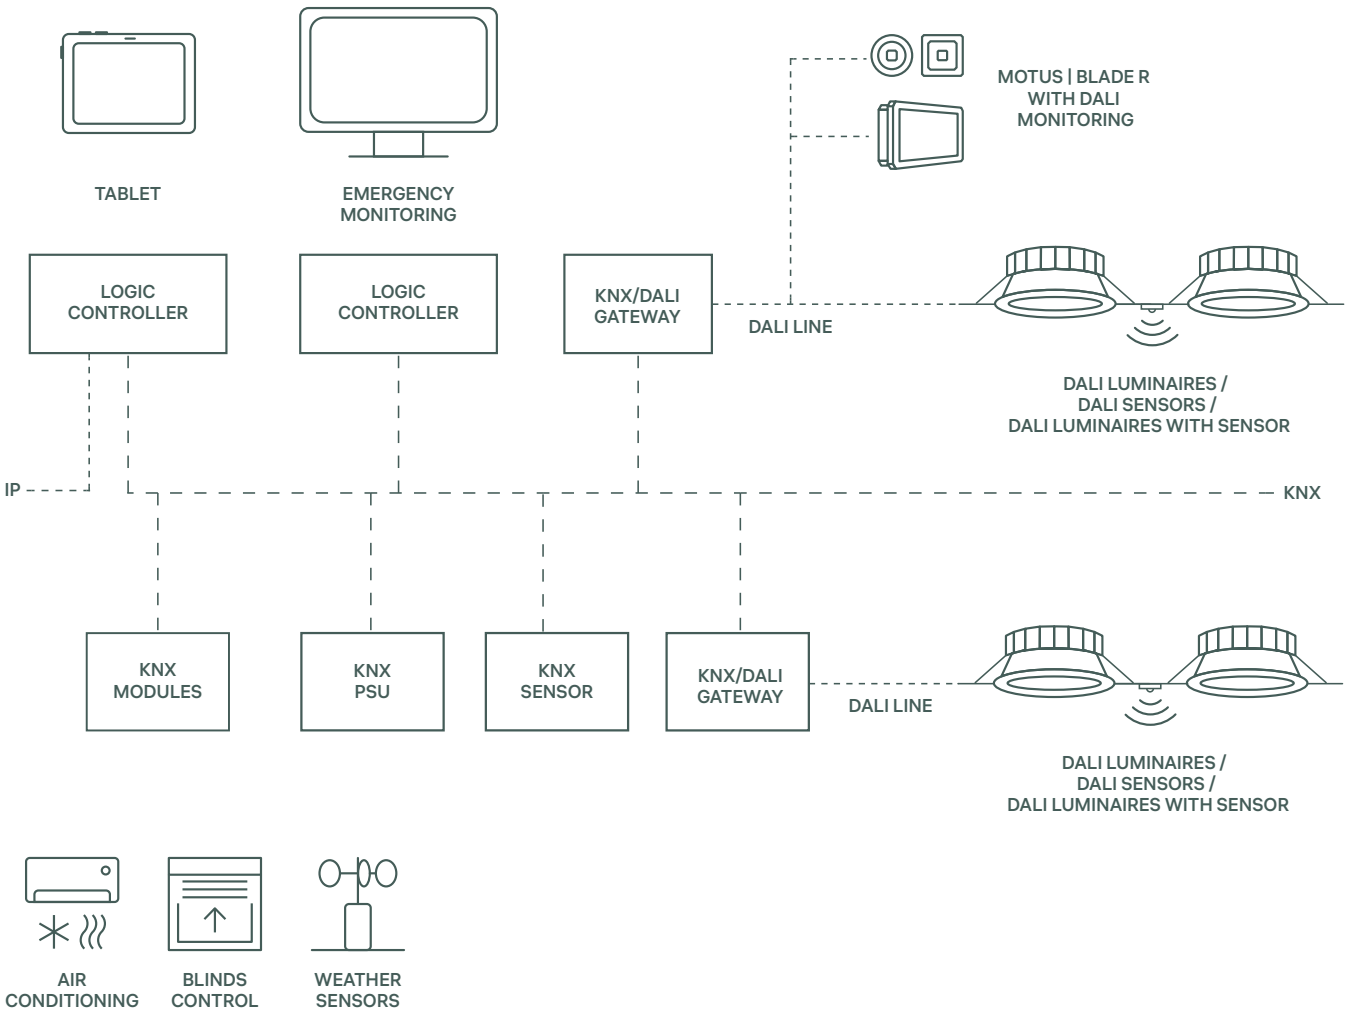

EXAMPLE: FOR THE CORRECT CONFIGURATION, PLEASE CONTACT IGUZZINI

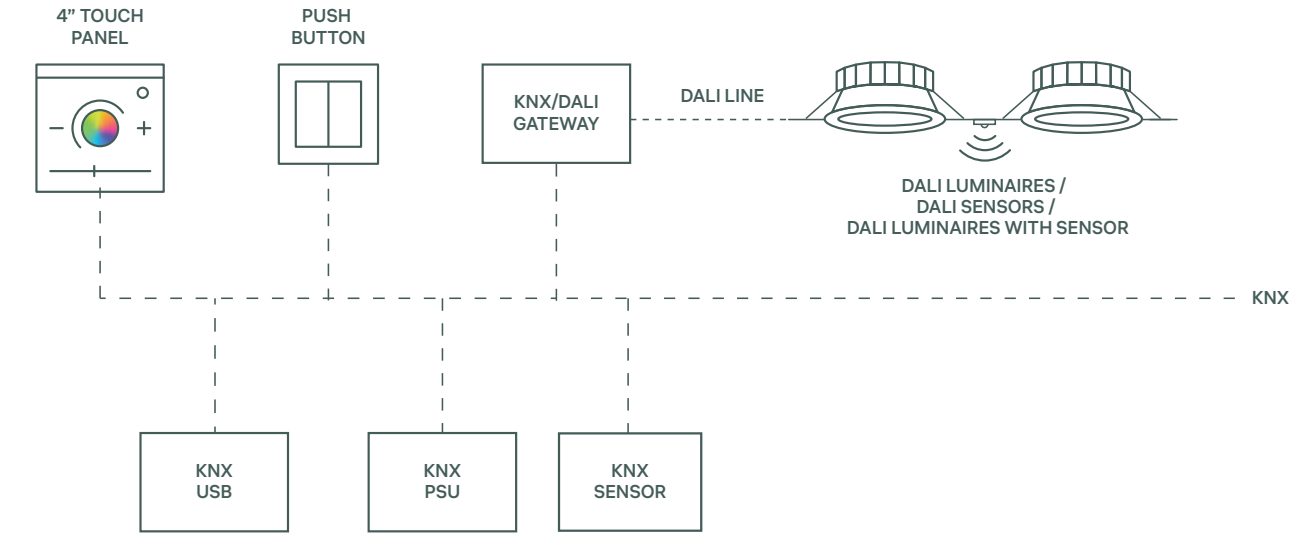

EXAMPLE: FOR THE CORRECT CONFIGURATION, PLEASE CONTACT IGUZZINI


QUICK DALI

design iGuzzini




Ponte vecchio - Bassano del Grappa, Italy
Ph: Alessandra Chemollo


QUICK DALI 7”

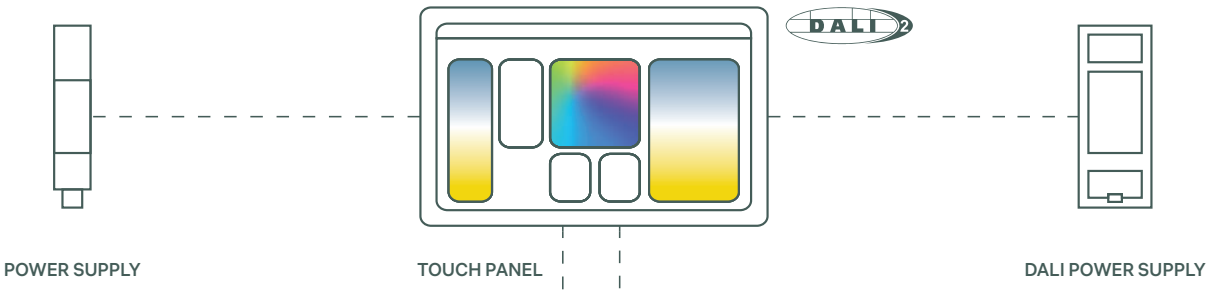

PLUG & PLAY BROADCAST:



WITH PROGRAMMING:



Quick DALI
Wired
DALI Protocol
Maximum 64 DALI addresses
Plug & Play (Broadcast)
Programmable
Calendar
Sequences
Circadian cycle
7” and 4” Touch Panel
Ideal for small offices, small retail spaces, meeting rooms.

Visit our website
for more information


MASTER PRO DMX



One Avenue Excellence Center - Shenzhen, China
Ph: Guozeng Jiang, Rivers Photography

Master Pro DMX
Wired
DMX-RDM, DALI, SPI, Art-Net Protocol
Programmable
Remote management, control, and scheduling options
Scenes and sequences
Touch panel and buttons for local control
Expert configuration for systems up to 3072 total addresses/channels
Designer configuration for systems with an unlimited number of channels/addresses
Ideal for outdoor architectural lighting, including dynamic effects

Visit our website
for more information

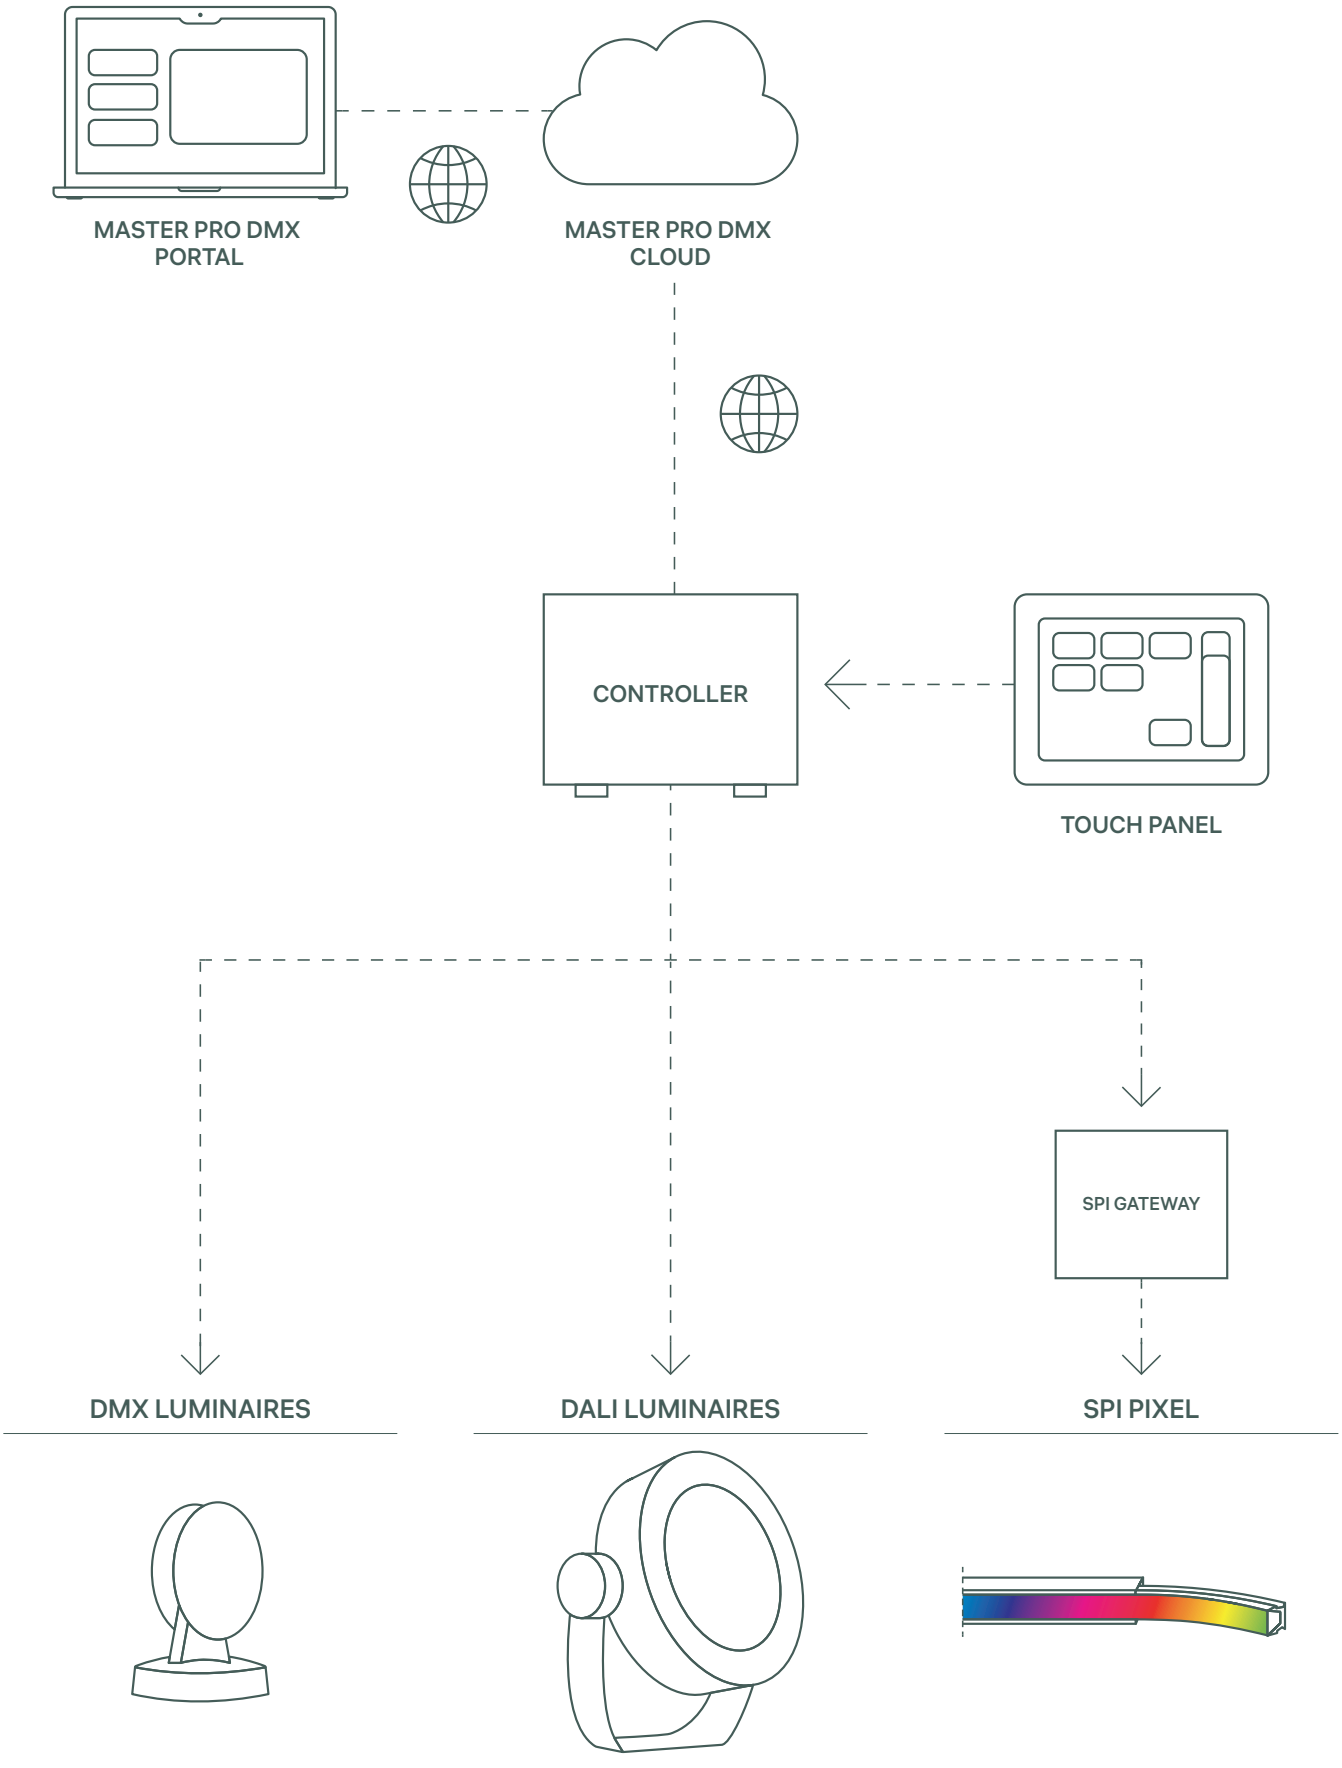


EXAMPLE: FOR THE CORRECT CONFIGURATION, PLEASE CONTACT IGUZZINI

QUICK DMX



Chaumont Viaduct - France
Ph: Richard Pelletier - Mairie de Chaumont

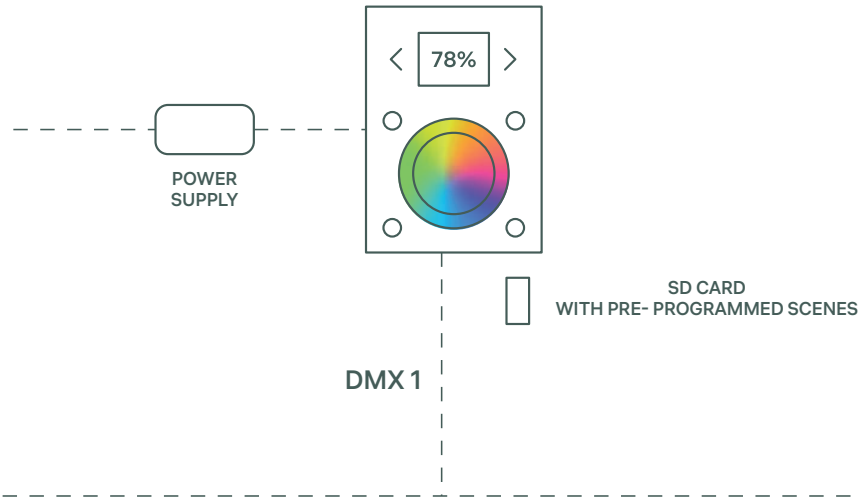

PLUG AND PLAY



TRICK RGB,
TRICK EM




LINEALUCE 47,
RGBW | RGB | TW



LINEALUCE 27,
RGBW | RGB




MAXIWOODY
RGB




IPRO
RGBW | RGB | TW



AGORÀ
RGBW | TW



PLATEA RGBW | TW



LEDSTRIP RGB
(WITH 9639)




UNDERSCORE RGB
(WITH 9639)




LIGHT UP EARTH
RGBW

WITH PROGRAMMING



ALL DMX PRODUCTS



ALL TW 2 CH
(WITH 9639)


Quick DMX
Wired
DMX protocol
Glass panel with touch controls and integrated display
Plug & Play with preset scenes and sequences on SD card
Programmable with free software
Maximum 512 channels + 512 channels
Power supply included
Ideal for architectural lighting, even with dynamic effects

Visit our website
for more information

SPACE MANAGEMENT



Lighthinking Space HQ iGuzzini illuminazione - Recanati, Italy
Ph: Studio Buschi

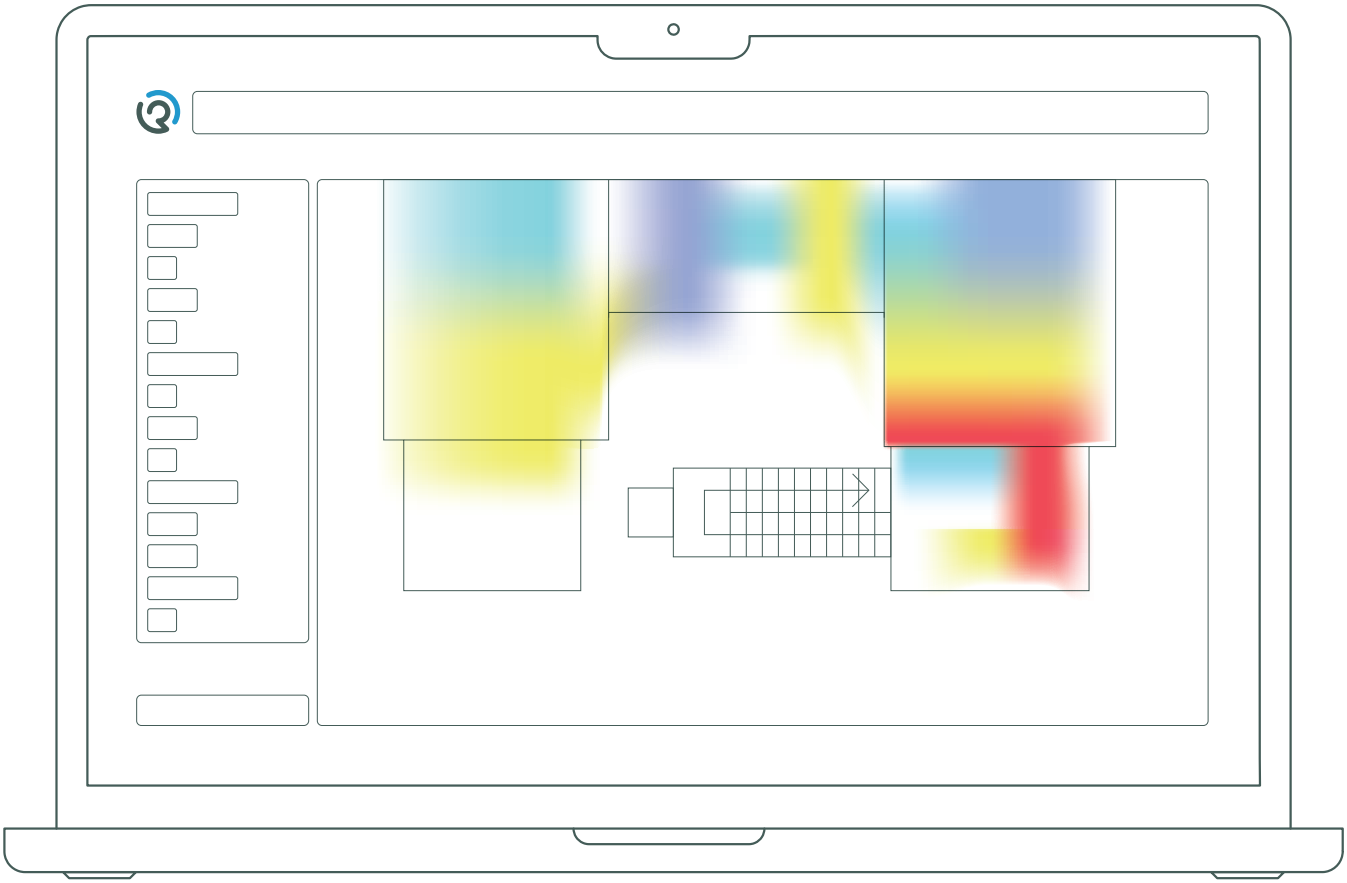

ORGANIC RESPONSE PORTAL

Space Management
Space Management
Service available through Organic Response luminaires, sensors, and gateways
Graphical representation of space usage on the web portal
Data Analytics
Ideal for offices and multifunctional environments

Visit our website
for more information

JIMINY – PUSH NOTIFICATION


design iGuzzini



Fondazione Cini “Nozze di Cana” - Venice, Italy
Ph: Stefano Anzini

Jiminy - Push Notification
Wireless
Bluetooth protocol
Integrated beacon in iGuzzini products
Cloud-based service
Remote content updating
App customization
Wide range of content types supported for notifications
Usable both indoors and outdoors
Ideal for museum and retail sectors

Visit our website
for more information

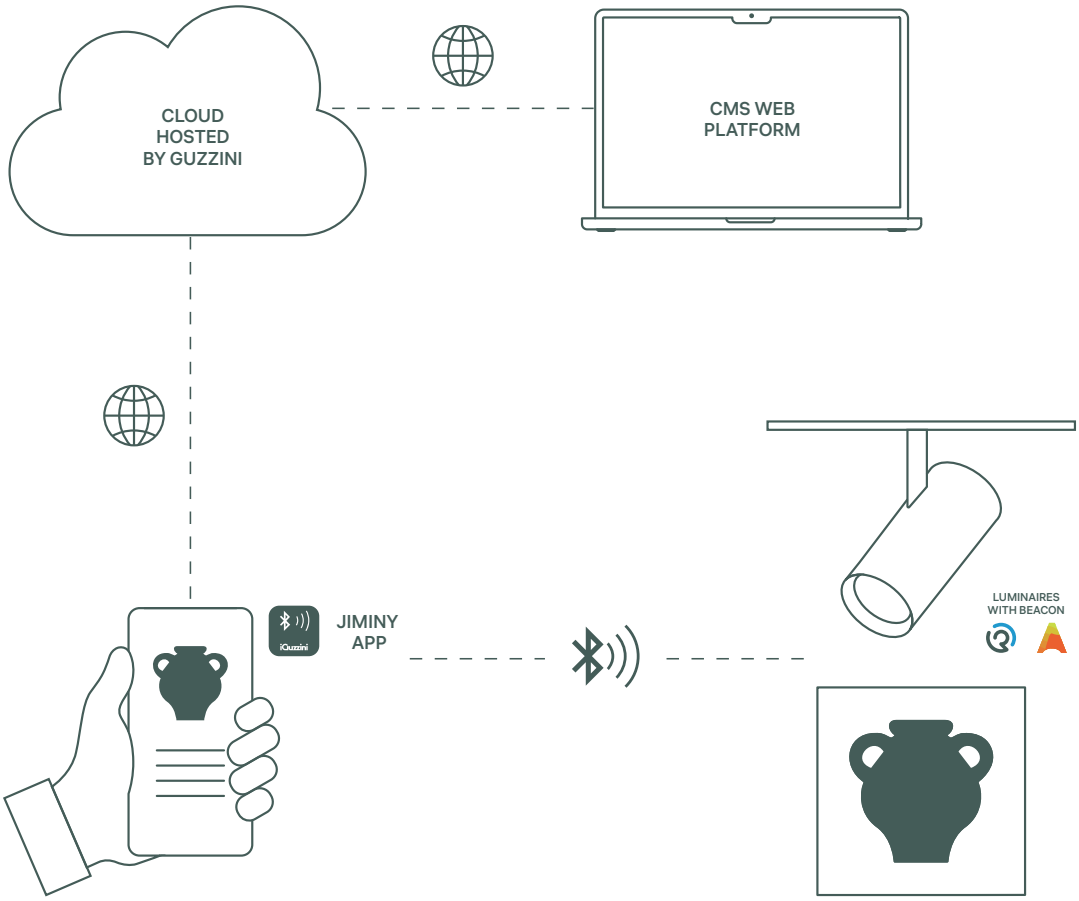


FOR THE VISITOR




JIMINY APP

FOR THE OWNER




JIMINY ADMIN APP
FOR COMMISSIONING



DASHBOARD
CONTENT ASSOCIATION TO BEACON
JIMINY APP CUSTOMIZATION
SIMPLIFIED CONTENT CREATION

PRODUCTS WITH INTEGRATED BEACON

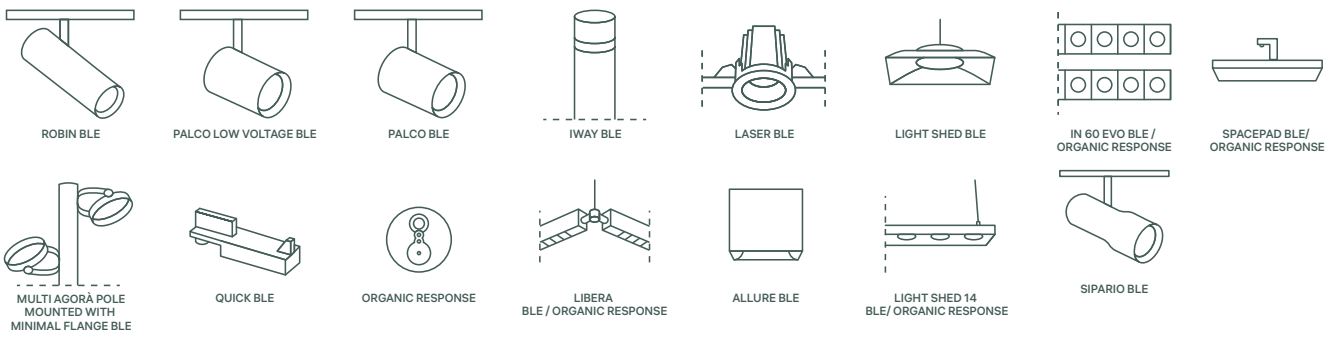

INDOOR PRODUCTS

Pag. 4 | Under restaurant - Lindesnes, Norway | Ph: Tomasz Majewski
Pag. 46 | MOL Campus – Budapest, Hungary | Ph: HGEsch Photography
Pag. 80 | University Of Texas Dallas - Arts and Performance Center (UTD APC) - Dallas, Texas, USA | Ph: Mauricio Rojas
Pag. 126 | Cultural Centre of the Stavros Niarchos Foundation Athens, Greece | Ph: Michel Denancé
Pag. 172 | Oman Museum Across Ages - Nizwa, Oman | Ph: Phillip Handforth
Pag. 196 | Politecnico di Milano's Architecture Campus - Milan, Italy | Ph: Michele Nastasi
Pag. 224 | Sacred Heart Sanctuary - Ca' Staccolo, Urbino, Italy | Ph: Michele Nastasi
Pag. 264 | Kincho restaurant - Sheraton Hotel Como, Italy | Ph: Luca Rotondo
Pag. 280 | Lighthinking Space HQ iGuzzini illuminazione - Recanati, Italy | Ph: Studio Buschi
Pag. 290 | WineBANK Köln - Colonia, Germany | Ph: Jens Kirchner

OUTDOOR PRODUCTS

Pag. 306 | Parco del Mare – Rimini, Italy | Ph: Fabio Di Carlo
Pag. 342 | HimmerLand Resort - Farsø, Denmark | Ph: Tomasz Majewski
Pag. 358 | HimmerLand Resort - Farsø, Denmark | Ph: Tomasz Majewski
Pag. 368 | Technical institute - Tampere, Finland | Ph: iGuzzini Archive
Pag. 376 | Gare de Mons – Belgium | Ph: Didier Boy de la Tour
Pag. 398 | Oman Museum Across Ages - Nizwa, Oman | Ph: Phillip Handforth
Pag. 410 | Jiu Ke Shu Future Arts Center - Shanghai, China | Ph: Seth Powers Photography
Pag. 418 | Modern Museum - Istanbul, Turkey | Ph: Cemal Emden
Pag. 428 | Church of Hvinningdal - Silkeborg, Denmark | Ph: Tomasz Majewski
Pag. 444 | D3 Creek Park - Dubai, UAE | Ph: Oliver Jackson
Pag. 462 | Winged Victory - Brescia, Italy | Ph: Alessandra Chemollo
Pag. 476 | Tunnel Rue Delandine - Lion, France | Ph: Michel Djaoui

INTELLIGENT LIGHT SOLUTIONS

Pag. 490 | University of Macerata. Loggia del Grano - Macerata, Italy | Ph: Studio Buschi

Editorial Coordination
iGuzzini illuminazione

Layout
XyComm

Render
iGuzzini, Salaposa, Gelfo Design

Print
Nava Press Milano
03/2026



iGuzzini

02/2026 9.9151.000.0