

Twilight

Design iGuzzini

iGuzzini

Last information update: December 2025

Product configuration: 2759.F5+X582.H1+X789.38

2759.F5: Pole-mounted system - STWt1.5 optic - Warm White - 27.1W 3640lm - 3000K - Rust Brown

X582.H1: Adapter required for installation on pole - To be ordered together with optic assembly - Ø60mm - Deep Grey

X789.38: Diffuser screen - Cortina PMMA - Opaline



Product code

2759.F5: Pole-mounted system - STWt1.5 optic - Warm White - 27.1W 3640lm - 3000K - Rust Brown

Technical description

Outdoor luminaire with direct light street optic. The optical assembly is made of EN1706AC 46100LF aluminium alloy, subjected to a multi-step, pre-treatment process in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a textured acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. The 5 mm thick, sodium-calcium closing glass for both optical assemblies is fitted to the product via 3 captive screws on each side. The high IP rating is guaranteed by the silicone gasket placed between the two elements. The Midnight preset (100-70%) power supply can be programmed via NFC technology. Power supply with automatic internal temperature control system. Complete with Warm White monochrome LED circuit. The wiring and optical assembly can be opened with everyday tools. The light flow emitted in the upper hemisphere of the system in the horizontal position is null (when used with a black finish pole-mounting). Product pre-wired with a 1.1m long outlet cable. The IP68 connector can be purchased separately as an accessory. All external screws are made of stainless steel.

Installation

The optical assembly can be installed using two pole-tops that can be ordered separately as an accessory: one for Ø 60mm and one for Ø76mm. It can be installed on Ø102mm pole-tops using a reducer that can be purchased as an accessory.

Colour

Rust Brown (F5)

Weight (Kg)

6.4


Mounting

pole-top

Wiring

Connection to be made with an IP68 connector, which can be purchased separately.

Complies with EN60598-1 and pertinent regulations



Accessory code

X582.H1: Adapter required for installation on pole - To be ordered together with optic assembly - Ø60mm - Deep Grey

Technical description

Liquid painted die-cast accessory required for pole-mounted installation. The screws used are made of stainless steel - Ø60mm

Colour

Deep Grey (H1)

Weight (Kg)

1.45

Complies with EN60598-1 and pertinent regulations



Accessory code

X789.38: Diffuser screen - Cortina PMMA - Opaline

Technical description

Cortina diffuser screen in PMMA that can be installed on the Twilight Copenhagen pole, wall and span-wire-mounted versions.


Colour

Opaline (38)

Weight (Kg)

1.13

Complies with EN60598-1 and pertinent regulations




Technical data


Im system:	3640	MacAdam Step:	3
W system:	24	Lamp code:	LED
Im source:	3640	Number of lamps for optical assembly:	1
W source:	24	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	151.7	Number of optical assemblies:	1
Im in emergency mode:	-	Operating ambient temperature range:	from -20°C to +35°C. (*)
Total light flux at or above an angle of 90° [Lm]:	9	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	100	Inrush current:	21 A / 300 µs
CRI (minimum):	70	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 13 luminaires B16A: 21 luminaires C10A: 21 luminaires C16A: 35 luminaires
Rf (Colour Fidelity Index):	78	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Rg (Gamut Index):	95	Control:	Midnight preset/DALI NFC
Colour temperature [K]:	3000		

* Preliminary data

Polar

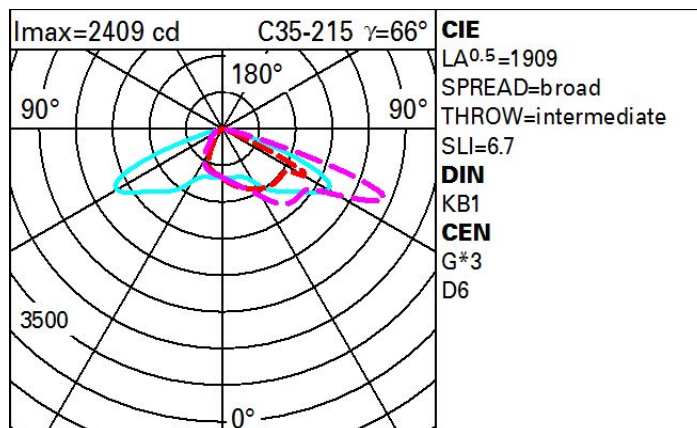

Isolux

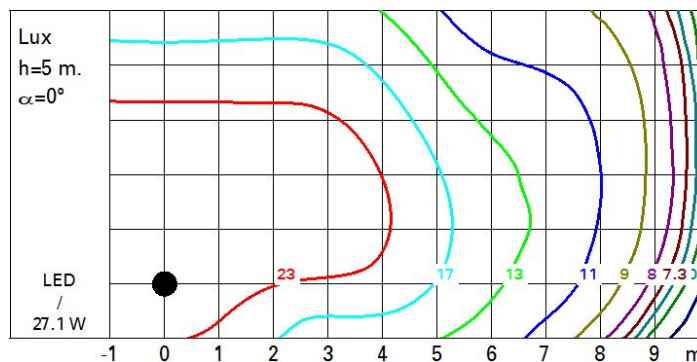

Utilisation factors

