


Last information update: December 2025

Product configuration: EP45.15

EP45.15: Wall-mounted system with street optic. - 44.9W 3570lm - 3000K - Grey

**Product code**

EP45.15: Wall-mounted system with street optic. - 44.9W 3570lm - 3000K - Grey

Technical description

Outdoor luminaire with a street optic (ST1.2), designed to use LED lamps, supplied with a painted steel wall-mounted arm L=561mm. The optical assembly is made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. Diffusor made of shockproof, UV-stabilised injection moulded polycarbonate. Complete with circuit featuring Neutral White monochrome LEDs and polymer optic multilayer lenses. Inside there is an anti-reflection film, a cover to stop light pollution and a special glass cover for the wall-mounting. Changeable driver and LEDs. Electronic MIDNIGHT driver with automatic internal temperature control system. All external screws are made of stainless steel.

Installation

Wall-mounted installation.

Weight (Kg)

7

Mounting

pole-top

Wiring

The product is supplied wired and with an outlet cable.

Notes


Overvoltage protection: 9KV Common Mode, 6KV Differential Mode.

Complies with EN60598-1 and pertinent regulations


**Technical data**

lm system:	3570	Life Time LED 3:	100,000h - L80 - B10 (Ta 40°C)
W system:	44.9	Voltage [Vin]:	230
lm source:	-	Lamp code:	LED
W source:	-	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	79.5	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	25	Operating ambient temperature range:	from -40°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	100	Lifetime of product at ambient operating temperature:	≥ 80.000h Ta=40°C
CRI (minimum):	70	Power factor:	See installation instructions
Rf (Colour Fidelity Index):	76	Inrush current:	62 A / 202 µs
Rg (Gamut Index):	94	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 6 luminaires B16A: 10 luminaires C10A: 10 luminaires C16A: 17 luminaires
Colour temperature [K]:	3000	Minimum dimming %:	10
MacAdam Step:	3	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)	Control:	Middle of the night
Life Time LED 2:	55,000h - L90 - B10 (Ta 40°C)		

Polar

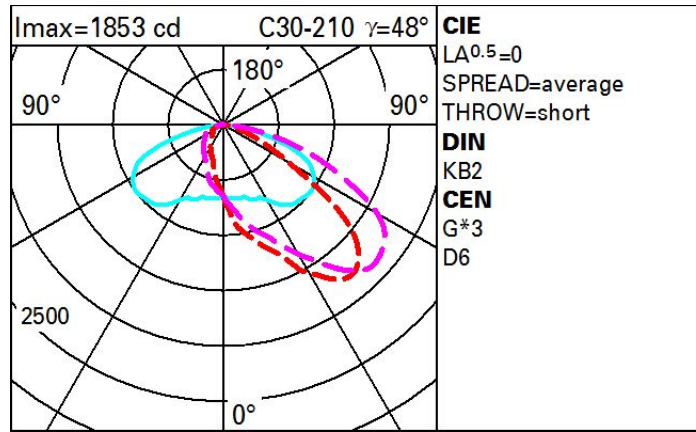

Isolux

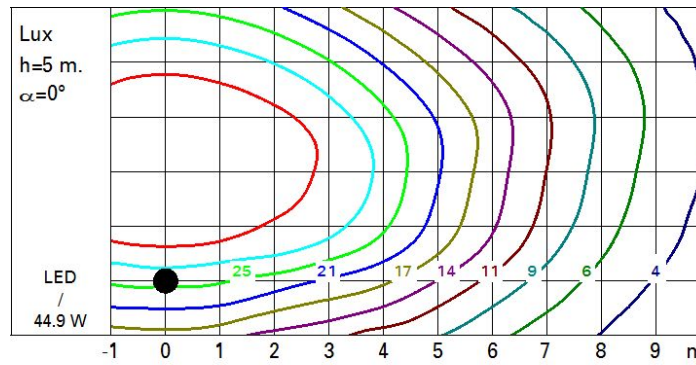

Utilisation factors

