

Light Shed 60


Design iGuzzini

iGuzzini

Last information update: December 2025

Product configuration: RD00.01

RD00.01: 621X621 - Sound-absorbent - warm white - MPO screen UGR<19 - DALI - 29.2W 3097.5lm - 3000K - White



Product code

RD00.01: 621X621 - Sound-absorbent - warm white - MPO screen UGR<19 - DALI - 29.2W 3097.5lm - 3000K - White

Technical description

621x621 mm luminaire for pendant installation or surface-mounted on a modular grille - LED lamp with high colour rendering index; 3000K warm white colour tone emission. Body made of thermal insulating, sound-absorbent, 85% recycled polyester fibre material. OEKO-TEX certified, standard 100, class I, hypoallergenic, skin contact safe product. Waterproof, breathable, non putrescible panel. Product with high efficiency LED complete with MPO screen for UGR<19 L<3000 cd/mq $\alpha > 65^\circ$ emission, for use in environments with video monitors in compliance with EN 12464-1. The DALI driver is free to be placed inside the the installation compartment as shown on the instruction sheet. Option of recessed installation in plasterboard ceilings using a frame to be ordered as an accessory. The product can be pendant-mounted using accessories to be ordered separately.

Installation

Surface-mounted on 625x625 mm modular panels. Recessed in plasterboard false ceilings using a frame accessory to be ordered separately. Pendant-mounted using accessories to be ordered separately.

Colour

White (01)

Weight (Kg)

1.9

Wiring

Product complete with DALI components. The electrical cables used are made of a "halogen free" material. (This means that the cables do not contain any halogen materials that in the event of a fire do not emit toxic or corrosive gases and only a small quantity of opaque fumes).

Notes

See graph for acoustic calculation in Documentation Other colours and customised features are available on request.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	3098	Rg (Gamut Index):	95
W system:	29.2	Colour temperature [K]:	3000
lm source:	5250	MacAdam Step:	3
W source:	26	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	106.1	Voltage [Vin]:	230
lm in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	59	ZVEI Code:	LED
CRI (minimum):	80	Number of optical assemblies:	1
Rf (Colour Fidelity Index):	85	Control:	DALI-2


Polar

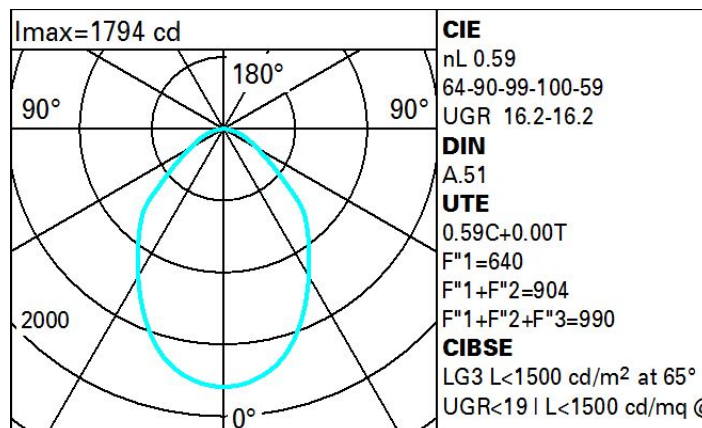

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	43	38	35	32	37	34	34	30	52
1.0	47	42	39	36	42	38	38	35	59
1.5	52	49	46	43	48	45	45	42	70
2.0	55	53	50	48	52	49	49	46	78
2.5	57	55	53	51	54	52	51	49	83
3.0	58	57	55	53	55	54	53	51	86
4.0	60	58	57	56	57	56	55	53	90
5.0	61	59	58	57	58	57	56	54	92

Luminance curve limit

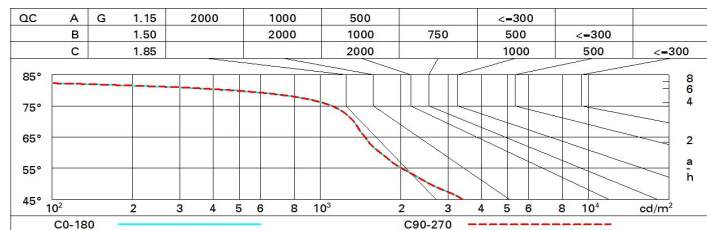

UGR diagram

Corrected UGR values (at 5250 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	14.5	15.5	14.8	15.7	16.0	14.5	15.5	14.8	15.7	16.0
	3H	15.2	16.1	15.6	16.4	16.7	14.7	15.6	15.1	15.9	16.2
	4H	15.5	16.3	15.9	16.6	17.0	14.8	15.6	15.1	15.9	16.2
	6H	15.6	16.4	15.9	16.7	17.0	14.8	15.6	15.1	15.9	16.2
	8H	15.5	16.3	15.9	16.6	17.0	14.8	15.5	15.1	15.8	16.2
	12H	15.5	16.2	15.9	16.6	16.9	14.7	15.4	15.1	15.8	16.2
4H	2H	14.8	15.6	15.1	15.9	16.2	15.5	16.3	15.9	16.6	17.0
	3H	15.7	16.4	16.1	16.8	17.2	15.9	16.6	16.3	17.0	17.3
	4H	16.1	16.7	16.5	17.1	17.5	16.1	16.7	16.5	17.1	17.5
	6H	16.2	16.8	16.6	17.2	17.6	16.2	16.7	16.6	17.1	17.6
	8H	16.2	16.7	16.6	17.1	17.5	16.2	16.7	16.6	17.1	17.5
	12H	16.1	16.6	16.6	17.0	17.5	16.1	16.6	16.6	17.0	17.5
8H	4H	16.2	16.7	16.6	17.1	17.5	16.2	16.7	16.6	17.1	17.5
	6H	16.3	16.7	16.8	17.2	17.7	16.3	16.7	16.8	17.1	17.6
	8H	16.3	16.6	16.8	17.1	17.6	16.3	16.6	16.8	17.1	17.6
	12H	16.2	16.5	16.7	17.0	17.6	16.3	16.6	16.8	17.0	17.6
12H	4H	16.1	16.6	16.6	17.0	17.5	16.1	16.6	16.6	17.0	17.5
	6H	16.3	16.6	16.8	17.1	17.6	16.2	16.6	16.7	17.1	17.6
	8H	16.3	16.6	16.8	17.0	17.6	16.2	16.5	16.7	17.0	17.6
Variations with the observer position at spacing:											
S =	1.0H	0.5 / -0.6					0.5 / -0.6				
	1.5H	1.0 / -1.4					1.0 / -1.4				
	2.0H	2.0 / -1.8					2.0 / -1.8				