


Last information update: November 2025

Product configuration: RM21.D8

RM21.D8: Ø 153 - 3500K - CRI90 - UGR<19 - White Transparent

**Product code**

RM21.D8: Ø 153 - 3500K - CRI90 - UGR<19 - White Transparent

Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Prismatic thermoplastic reflector complete with flux enhancer. Optic available with two finishes, clear white or clear black. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3500K) and microfilm that is able to guarantee a light beam of UGR<19 L<3000 cd/m², which is ideal for environments with video terminals.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

Colour

White Transparent (D8)

Weight (Kg)

0.76

Mounting

ceiling surface

Wiring

Product complete with DALI components

Notes

TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of
the product once installed**Technical data**

lm system:	1335	Colour temperature [K]:	3500
W system:	11.3	MacAdam Step:	2
lm source:	1500	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	9.6	Lamp code:	LED
Luminous efficiency (lm/W, real value):	118.1	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	89	Control:	DALI-2
CRI (minimum):	90		


Polar

 Imax=935 cd α=74°	CIE				Lux							
	nL 0.89				h	d	Em	Emax				
	81-97-99-100-89				1	1.5	684	893				
	UGR 18.4-18.2				2	3	171	223				
	DIN A.61				3	4.5	76	99				
UTE 0.89B+0.00T					4	6	43	56				
F*1=809												
F*1+F*2=970												
F*1+F*2+F*3=993												
CIBSE												
LG3 L<3000 cd/m² at 65°												
UGR<19 L<3000 cd/mq @65°												

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	66	62	59	65	62	61	57	64
1.0	77	72	68	65	71	67	67	63	70
1.5	84	79	76	73	78	75	74	71	80
2.0	87	84	81	79	83	80	79	76	85
2.5	89	87	85	83	85	83	83	79	89
3.0	91	89	87	85	87	86	84	82	92
4.0	92	91	89	88	89	88	87	84	94
5.0	93	92	91	90	90	89	88	85	95

Luminance curve limit

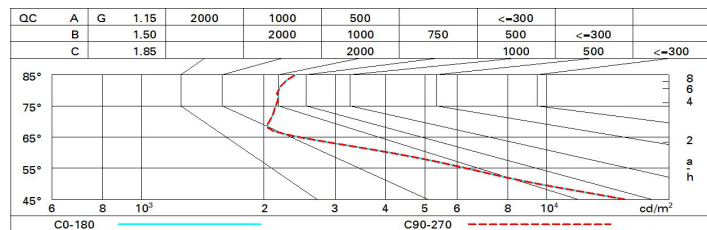

UGR diagram

Corrected UGR values (at 1500 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	18.3	19.1	18.6	19.3	19.6	18.3	19.1	18.6	19.3	19.6
	3H	18.3	19.0	18.6	19.3	19.6	18.3	19.0	18.6	19.3	19.5
	4H	18.3	18.9	18.6	19.2	19.5	18.2	18.9	18.6	19.2	19.5
	6H	18.3	18.9	18.6	19.2	19.5	18.1	18.8	18.5	19.1	19.4
	8H	18.3	18.9	18.7	19.2	19.6	18.1	18.7	18.5	19.0	19.4
	12H	18.3	18.9	18.7	19.2	19.6	18.1	18.6	18.5	19.0	19.3
4H	2H	18.2	18.9	18.6	19.2	19.5	18.3	18.9	18.6	19.2	19.5
	3H	18.2	18.8	18.6	19.1	19.5	18.3	18.9	18.7	19.2	19.6
	4H	18.3	18.8	18.7	19.1	19.5	18.3	18.8	18.7	19.1	19.5
	6H	18.3	18.8	18.8	19.2	19.6	18.2	18.7	18.7	19.1	19.5
	8H	18.4	18.8	18.8	19.2	19.6	18.2	18.6	18.7	19.0	19.5
	12H	18.4	18.7	18.8	19.2	19.6	18.2	18.5	18.6	19.0	19.4
8H	4H	18.2	18.6	18.7	19.0	19.5	18.4	18.8	18.8	19.2	19.6
	6H	18.3	18.7	18.8	19.1	19.6	18.4	18.7	18.9	19.2	19.6
	8H	18.4	18.7	18.9	19.1	19.6	18.4	18.7	18.9	19.1	19.6
	12H	18.5	18.7	19.0	19.2	19.7	18.4	18.6	18.9	19.1	19.6
12H	4H	18.2	18.5	18.6	19.0	19.4	18.4	18.7	18.8	19.2	19.6
	6H	18.3	18.6	18.8	19.1	19.6	18.4	18.7	18.9	19.2	19.7
	8H	18.4	18.6	18.9	19.1	19.6	18.5	18.7	19.0	19.2	19.7
Variations with the observer position at spacing:											
S =	1.0H	1.7 / -2.6					1.7 / -2.6				
	1.5H	3.5 / -4.1					3.5 / -4.1				
	2.0H	5.3 / -4.9					5.3 / -4.9				