

Easy Space Square





Design iGuzzini

iGuzzini

Last information update: November 2025

Product configuration: RM36.D8

RM36.D8: Square 105 - General Lighting - ON-OFF - Warm White - White / transparent



Product code

RM36.D8: Square 105 - General Lighting - ON-OFF - Warm White - White / transparent **Attention! Code no longer in production**

Technical description

Square recess luminaire with fixed optics, in version with outer frame. LED source with high colour rendering index for general lighting uses. Emission unit made up of a transparent PMMA prismatic reflector in combination with the flow recovery unit and diffuser screen, both produced in PMMA, integrated into the external polycarbonate structure. The painted die-cast aluminium diffuser encompasses the steel wire coupling springs. A power supply unit connected to the luminaire.

Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick

Colour

White Transparent (D8)

Weight (Kg)

0.35

Mounting

ceiling surface

Wiring

functioning electronic components - power supply connection on the terminals with rapid connection of the driver.

Notes

TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations



IP20

IP54


On the visible part of the product once installed



Technical data

Im system:	1220	Colour temperature [K]:	3500
W system:	11.5	MacAdam Step:	2
Im source:	1470	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	9.5	Lamp code:	LED
Luminous efficiency (Im/W, 106.1 real value):		Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	On/off
CRI (minimum):	90		


Polar

			CIE nL 0.83 81-97-99-100-83 UGR 19.9-19.7 DIN A.61 UTE 0.83B+0.00T F*1=815 F*1+F*2=974 F*1+F*2+F*3=993			Lux				
90°	180°	90°				h	d1	d2	Em	Emax
						1	1.3	1.3	737	1027
						2	2.6	2.6	184	257
						3	3.9	3.9	82	114
						4	5.2	5.2	46	64

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	62	58	55	61	58	57	54	65
1.0	72	67	63	61	66	63	62	59	71
1.5	78	74	71	69	73	70	70	66	80
2.0	81	79	76	74	77	75	74	71	86
2.5	83	81	79	78	80	78	77	74	89
3.0	85	83	81	80	81	80	79	76	92
4.0	86	85	83	82	83	82	81	78	94
5.0	87	86	85	84	84	83	82	79	95

Luminance curve limit

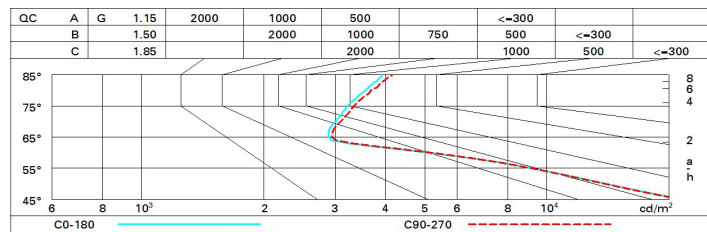

UGR diagram

Corrected UGR values (at 1470 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	19.9	20.6	20.1	20.9	21.1	19.8	20.6	20.1	20.9	21.1
	3H	19.8	20.5	20.1	20.8	21.1	19.8	20.5	20.1	20.8	21.1
	4H	19.8	20.4	20.1	20.7	21.0	19.8	20.4	20.1	20.7	21.0
	6H	19.8	20.4	20.2	20.7	21.1	19.7	20.3	20.0	20.6	20.9
	8H	19.8	20.4	20.2	20.7	21.1	19.6	20.2	20.0	20.5	20.9
	12H	19.8	20.4	20.2	20.7	21.1	19.6	20.2	20.0	20.5	20.9
4H	2H	19.8	20.4	20.1	20.7	21.0	19.8	20.4	20.1	20.7	21.0
	3H	19.7	20.3	20.1	20.6	21.0	19.8	20.3	20.2	20.7	21.0
	4H	19.8	20.2	20.2	20.6	21.0	19.8	20.2	20.2	20.6	21.0
	6H	19.8	20.2	20.3	20.6	21.1	19.7	20.1	20.1	20.5	20.9
	8H	19.9	20.3	20.3	20.7	21.1	19.7	20.1	20.1	20.5	20.9
	12H	19.9	20.3	20.4	20.7	21.1	19.6	20.0	20.1	20.4	20.9
8H	4H	19.7	20.1	20.1	20.5	20.9	19.9	20.3	20.3	20.7	21.1
	6H	19.8	20.1	20.3	20.6	21.0	19.9	20.2	20.4	20.7	21.1
	8H	19.9	20.2	20.4	20.6	21.1	19.9	20.2	20.4	20.6	21.1
	12H	20.0	20.2	20.5	20.7	21.2	19.9	20.1	20.4	20.6	21.1
12H	4H	19.6	20.0	20.1	20.4	20.9	19.9	20.3	20.4	20.7	21.2
	6H	19.8	20.0	20.3	20.5	21.0	20.0	20.2	20.5	20.7	21.2
	8H	19.9	20.1	20.4	20.6	21.1	20.0	20.2	20.5	20.7	21.3
Variations with the observer position at spacing:											
S =	1.0H	2.1 / -2.9					2.1 / -2.8				
	1.5H	3.4 / -4.8					3.4 / -4.6				
	2.0H	5.2 / -5.2					5.2 / -5.0				