


Last information update: December 2025

Product configuration: RN01.01

RN01.01: Adjustable recessed spotlight - body Ø92 - High Output - Flood optic - 27.6W 2745lm - 3000K - CRI 90 - White



Product code

RN01.01: Adjustable recessed spotlight - body Ø92 - High Output - Flood optic - 27.6W 2745lm - 3000K - CRI 90 - White

Technical description

Adjustable spotlight for recessed installation. Load-bearing structure with contact frame and die-cast aluminium, adjustable lighting body. Steel wire fixing springs. Coupling and rotation element in high resistance plastic, designed as a stylish internal cover and a practical recessed mounting. Available rotation: 359° - Adjustability: +60° (external) -20° (internal). Optical assembly featuring an LED lamp with high color rendering index and optimum flux yield performance. The anti-scratch reflector made of P.V.D (Physical Vapour Deposition) aluminium provides optimum performance levels in terms of yield. Supplied with a dimmable DALI power supply unit connected to the luminaire. Possibility of installing a flat frontal accessory - glass cover or an elliptical distribution refractor. Interchangeable spotlights in all openings available as accessories.

Installation

Recessed in false ceiling - fixed via steel wire springs for thicknesses from 1 to 25 mm.

Colour

White (01)

Weight (Kg)

0.69

Mounting

ceiling recessed

Wiring

Direct power line connection via the terminals on the power supply unit included.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	2745	CRI (minimum):	90
W system:	27.6	Colour temperature [K]:	3000
Im source:	3050	MacAdam Step:	2
W source:	24	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	99.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	90	Number of optical assemblies:	1
Beam angle [°]:	29°	Control:	DALI-2


Polar

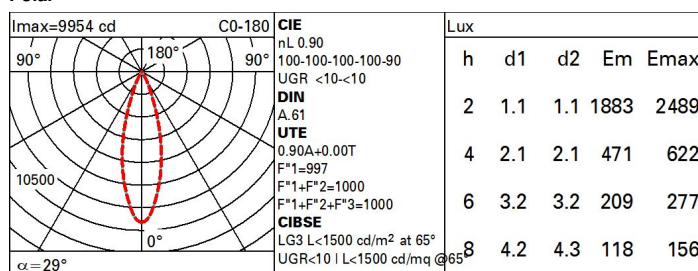

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	81	77	74	72	76	74	73	70	78
1.0	85	81	78	76	80	78	77	75	83
1.5	89	86	84	82	85	83	82	80	89
2.0	92	90	88	87	88	87	86	84	93
2.5	93	92	91	90	91	89	89	86	96
3.0	95	94	93	92	92	91	90	88	98
4.0	96	95	94	94	93	93	92	89	99
5.0	96	96	95	95	94	94	92	90	100

Luminance curve limit

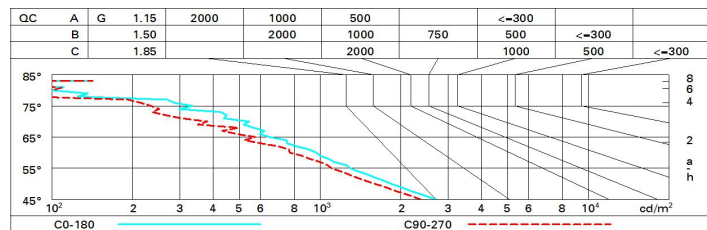

UGR diagram

Corrected UGR values (at 3050 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	0.4	0.9	0.7	7.2	7.4	0.0	0.5	0.2	0.7	0.9
	3H	0.3	0.8	0.6	7.0	7.3	5.8	0.3	0.1	0.6	0.8
	4H	0.2	0.7	0.6	7.0	7.3	5.8	0.2	0.1	0.5	0.8
	6H	0.2	0.6	0.5	6.9	7.2	5.7	0.1	0.0	0.4	0.7
	8H	0.1	0.5	0.5	6.8	7.2	5.7	0.0	0.0	0.4	0.7
	12H	0.1	0.5	0.5	6.8	7.2	5.6	0.0	0.0	0.3	0.7
4H	2H	0.2	0.7	0.6	7.0	7.3	5.8	0.2	0.1	0.5	0.8
	3H	0.1	0.5	0.5	6.8	7.2	5.6	0.0	0.0	0.3	0.7
	4H	0.0	0.4	0.4	6.7	7.1	5.5	5.9	5.9	0.2	0.6
	6H	5.9	6.2	0.4	6.6	7.0	5.5	5.7	5.9	0.1	0.6
	8H	5.9	6.2	0.3	6.6	7.0	5.4	5.7	5.9	0.1	0.5
	12H	5.8	6.1	0.3	6.5	7.0	5.4	5.6	5.8	0.0	0.5
8H	4H	5.9	6.2	0.3	6.6	7.0	5.4	5.7	5.9	0.1	0.5
	6H	5.8	6.0	0.3	6.5	6.9	5.3	5.5	5.8	0.0	0.5
	8H	5.7	5.9	0.2	6.4	6.9	5.3	5.5	5.7	5.9	0.4
	12H	5.7	5.8	0.2	6.3	6.9	5.2	5.4	5.7	5.9	0.4
12H	4H	5.8	6.1	0.3	6.5	7.0	5.4	5.6	5.8	0.0	0.5
	6H	5.7	5.9	0.2	6.4	6.9	5.3	5.5	5.7	5.9	0.4
	8H	5.7	5.8	0.2	6.3	6.9	5.2	5.4	5.7	5.9	0.4
Variations with the observer position at spacing:											
S =	1.0H	6.9 / -11.0					6.9 / -11.3				
	1.5H	9.7 / -12.9					9.7 / -13.2				
	2.0H	11.7 / -14.7					11.7 / -15.2				