

Superrail DALI Powerline system

Design iGuzzini

iGuzzini

Last information update: December 2025

Product configuration: RZ79.G0

RZ79.G0: Module for Superrail 48V track - DALI - UGR<19 - L=1828 - - 14.8W 1785lm - 2700K - CRI 90 - White/White Transparent



Product code

RZ79.G0: Module for Superrail 48V track - DALI - UGR<19 - L=1828 - - 14.8W 1785lm - 2700K - CRI 90 - White/White Transparent

Technical description

Linear lighting product with 2700K CRI90 monochrome LED complete with adapter for installation on a Superrail 48V track. UGR<19 luminaire with controlled luminance ($L \leq 3000 \text{cd/m}^2$) ideal for environments with video screen use. Opti-Diamond Space optic available in a White Cover (Transparent white) or Black Cover (Transparent black) version. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each light module on the track to be adjusted separately. Frameless version main body made of extruded aluminium. A rapid tool-free system for connecting the adapter electrically and mechanically to the track.

Installation

Mechanical fastening with adapter on a Superrail 48V track

Colour

White/White Transparent (G0)

Weight (Kg)

1.03

Mounting

Low voltage track

Wiring

Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	1785	MacAdam Step:	3
W system:	14.8	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Im source:	2100	Voltage [Vin]:	48
W source:	13	Lamp code:	LED
Luminous efficiency (Im/W, real value):	120.6	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	34	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	85	LED current [mA]:	39
CRI (minimum):	90	Power factor:	See installation instructions
Rf (Colour Fidelity Index):	91	Minimum dimming %:	5
Rg (Gamut Index):	97	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	2700	Control:	DALI


Polar

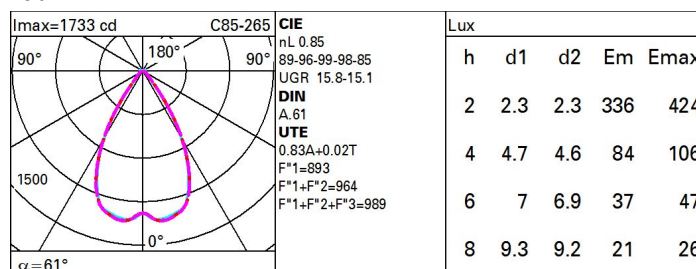

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	67	63	61	66	63	62	59	70
1.0	76	71	68	65	70	67	67	63	76
1.5	81	77	74	72	76	73	72	69	83
2.0	84	81	79	77	80	78	77	73	88
2.5	86	84	82	80	82	80	79	76	91
3.0	87	85	84	83	84	82	81	78	94
4.0	88	87	86	85	85	84	83	80	96
5.0	89	88	87	87	86	85	84	81	97

Luminance curve limit

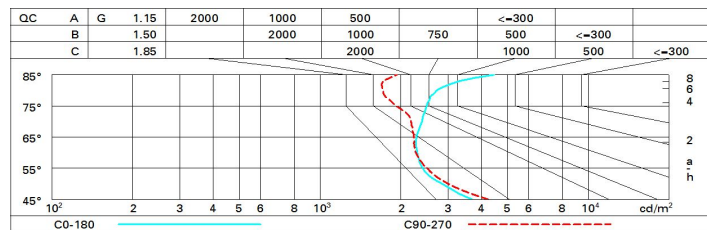

UGR diagram

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.0	14.7	14.3	14.9	15.2	14.3	14.9	14.6	15.2	15.5
	3H	14.5	15.0	14.8	15.4	15.7	14.3	14.9	14.6	15.2	15.5
	4H	14.8	15.3	15.1	15.6	16.0	14.3	14.8	14.6	15.1	15.5
	6H	15.1	15.6	15.5	15.9	16.3	14.2	14.7	14.6	15.1	15.5
	8H	15.3	15.8	15.7	16.1	16.5	14.2	14.7	14.6	15.1	15.4
	12H	15.5	16.0	15.9	16.4	16.8	14.2	14.6	14.6	15.0	15.4
4H	2H	14.0	14.6	14.4	14.9	15.2	14.8	15.3	15.1	15.7	16.0
	3H	14.6	15.1	15.0	15.4	15.8	14.9	15.4	15.3	15.8	16.1
	4H	15.0	15.4	15.5	15.8	16.3	15.0	15.4	15.4	15.8	16.2
	6H	15.5	15.9	16.0	16.3	16.8	15.0	15.4	15.5	15.8	16.3
	8H	15.8	16.1	16.3	16.6	17.1	15.1	15.4	15.5	15.8	16.3
	12H	16.2	16.5	16.7	17.0	17.5	15.1	15.4	15.5	15.8	16.3
8H	4H	15.1	15.4	15.6	15.9	16.4	15.3	15.6	15.7	16.0	16.5
	6H	15.8	16.0	16.3	16.5	17.0	15.4	15.7	15.9	16.2	16.7
	8H	16.2	16.4	16.7	16.9	17.5	15.5	15.8	16.1	16.3	16.8
	12H	16.8	17.0	17.3	17.5	18.1	15.7	15.9	16.2	16.4	16.9
12H	4H	15.1	15.4	15.6	15.9	16.4	15.4	15.7	15.8	16.1	16.6
	6H	15.8	16.0	16.3	16.5	17.1	15.6	15.8	16.1	16.3	16.9
	8H	16.3	16.5	16.8	17.0	17.6	15.7	15.9	16.3	16.5	17.0
Variations with the observer position at spacing:											
S =	1.0H	1.8 / -1.1					2.3 / -1.7				
	1.5H	3.5 / -1.3					4.4 / -2.0				
	2.0H	5.1 / -1.4					6.1 / -2.1				