


Last information update: December 2025

Product configuration: SL31.04+SL31.04

SL31.04: Sorella table lamp H=322.80 - 4.3W 408.9lm - Black

**Product code**

SL31.04: Sorella table lamp H=322.80 - 4.3W 408.9lm - Black

Technical description

Direct light table illuminating body H=322.80mm. PMMA shells (complete with counterweight to ensure stability) and E14 lamp holder. Power supply cable L = 2000 with plug and ON-OFF section breaker switch. E14 40W LED bulb lamp included.

Installation

Table lamp

Colour
Black (04)**Weight (Kg)**
1.9**Mounting**

table top


Wiring

Cable with section breaker switch and plug. E14 40W LED lamp included.

Complies with EN60598-1 and pertinent regulations

**Technical data**


lm system:	89	Colour temperature [K]:	2700
W system:	4.3	MacAdam Step:	6
lm source:	470	Lamp code:	LED
W source:	4.3	Socket:	E14
Luminous efficiency (lm/W, real value):	20.8	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	20	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	19	Control:	On/off
CRI (minimum):	80		

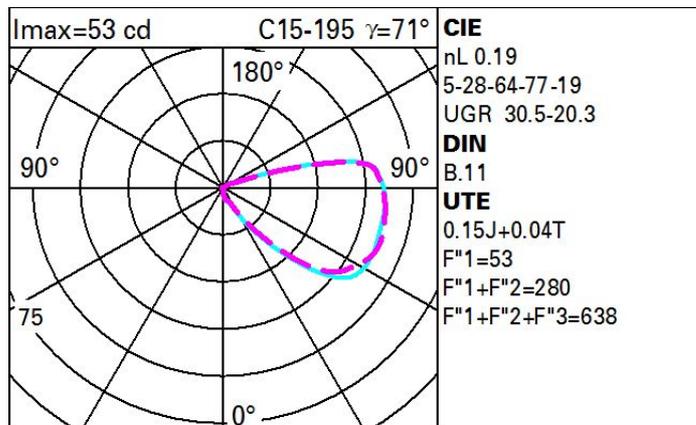Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	8	6	4	3	5	3	3	1	7
1.0	10	7	5	4	6	4	4	2	11
1.5	11	9	7	6	8	6	6	3	21
2.0	13	10	9	7	9	8	7	4	30
2.5	13	12	10	8	10	9	8	5	37
3.0	14	12	11	9	11	10	9	6	42
4.0	15	13	12	11	12	11	10	7	51
5.0	16	14	13	12	13	12	11	8	57

Luminance curve limit

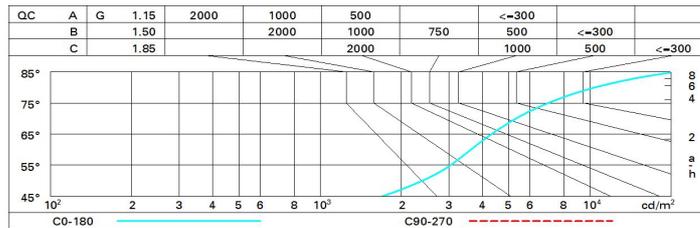

UGR diagram

Corrected UGR values (at 470 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	19.0	21.0	20.3	21.7	22.0	3.1	4.5	3.8	5.2	0.1
	3H	23.5	24.8	24.2	25.5	26.4	10.5	11.8	11.2	12.0	13.5
	4H	25.5	26.7	26.2	27.5	28.4	13.4	14.6	14.1	15.3	16.2
	6H	27.6	28.8	28.3	29.6	30.5	15.3	16.4	16.0	17.2	18.1
	8H	28.8	29.9	29.5	30.7	31.6	16.0	17.1	16.7	17.9	18.8
	12H	30.1	31.2	30.9	32.0	32.9	16.3	17.4	17.0	18.2	19.1
4H	2H	20.5	21.7	21.2	22.5	23.4	3.0	4.2	3.7	5.0	5.9
	3H	24.7	25.8	25.5	26.6	27.5	11.2	12.3	11.9	13.1	14.0
	4H	26.9	27.9	27.6	28.7	29.6	15.1	16.1	15.9	16.9	17.9
	6H	29.2	30.1	30.0	30.9	31.9	18.8	19.7	19.6	20.5	21.5
	8H	30.5	31.3	31.2	32.1	33.1	20.3	21.2	21.1	22.0	22.9
	12H	31.9	32.7	32.7	33.5	34.5	21.4	22.2	22.2	23.0	24.0
8H	4H	27.6	28.4	28.3	29.2	30.2	15.0	15.8	15.7	16.6	17.6
	6H	30.2	31.0	31.0	31.8	32.8	18.9	19.7	19.7	20.5	21.5
	8H	31.7	32.4	32.5	33.2	34.2	21.1	21.8	21.9	22.6	23.6
	12H	33.4	34.0	34.2	34.8	35.8	23.5	24.1	24.3	24.9	26.0
12H	4H	27.6	28.4	28.4	29.2	30.2	14.9	15.7	15.7	16.5	17.5
	6H	30.5	31.1	31.3	32.0	33.0	18.9	19.6	19.7	20.4	21.4
	8H	32.1	32.7	32.9	33.5	34.6	21.1	21.7	21.9	22.5	23.5
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.3 / -0.4				
	1.5H	0.2 / -0.3					0.6 / -0.7				
	2.0H	0.3 / -0.4					1.0 / -1.0				