


Last information update: January 2026

**Product configuration: UH30.15+TAMB35+Ta35°C**

UH30.15: Spotlight with bracket (to be ordered separately) - Neutral White LED - Remote Ballast - Super Spot optic - Class I - 61.9W  
 4125lm - 4000K - Grey  
 TAMB35: Ta35° C

**Product code**

UH30.15: Spotlight with bracket (to be ordered separately) - Neutral White LED - Remote Ballast - Super Spot optic - Class I - 61.9W  
 4125lm - 4000K - Grey

**Technical description**

Spotlight designed to use LED lamps and a Super Spot optic. Consists of a die-cast aluminium optical assembly, steel brackets (both a bracket for the spotlight and a bracket for handle/pole application) and a clear, tempered sodium-calcium safety glass cover. It is fitted with an A2 stainless steel cable gland and a 2x1mm<sup>2</sup> section 05RN-F cable. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Neutral White monochrome LED circuit. The electronic DALI ballast is remote and can be ordered separately to allow the spotlights to be connected in series. The spotlight is fitted with a protection system that in the event of a fault allows all the other products in the same circuit to operate normally. Class I, IP67 rated power supply units must be used (all the necessary information is included in the instruction sheet). Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

**Installation**

Floor-installed or wall-mounted with a bracket or handle (special bracket).

**Colour**

Grey (15)

**Weight (Kg)**

3.6

**Wiring**

A2 stainless steel cable gland.

Complies with EN60598-1 and pertinent regulations




IK08

IP66


**Technical data**

|                                                    |      |                                       |                                |
|----------------------------------------------------|------|---------------------------------------|--------------------------------|
| Im system:                                         | 4125 | Rg (Gamut Index):                     | 96                             |
| W system:                                          | 61.9 | Colour temperature [K]:               | 4000                           |
| Im source:                                         | 5500 | MacAdam Step:                         | 3                              |
| W source:                                          | 54   | Life Time LED 1:                      | 100,000h - L90 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value):            | 66.6 | Lamp code:                            | LED                            |
| Im in emergency mode:                              | -    | Number of lamps for optical assembly: | 1                              |
| Total light flux at or above an angle of 90° [Lm]: | 0    | ZVEI Code:                            | LED                            |
| Light Output Ratio (L.O.R.) [%]:                   | 75   | Number of optical assemblies:         | 1                              |
| Beam angle [°]:                                    | 4°   | Operating ambient temperature range:  | from -30°C to 35°C.            |
| CRI (minimum):                                     | 80   | Control:                              | DALI-2                         |
| Rf (Colour Fidelity Index):                        | 87   |                                       |                                |

# Polar

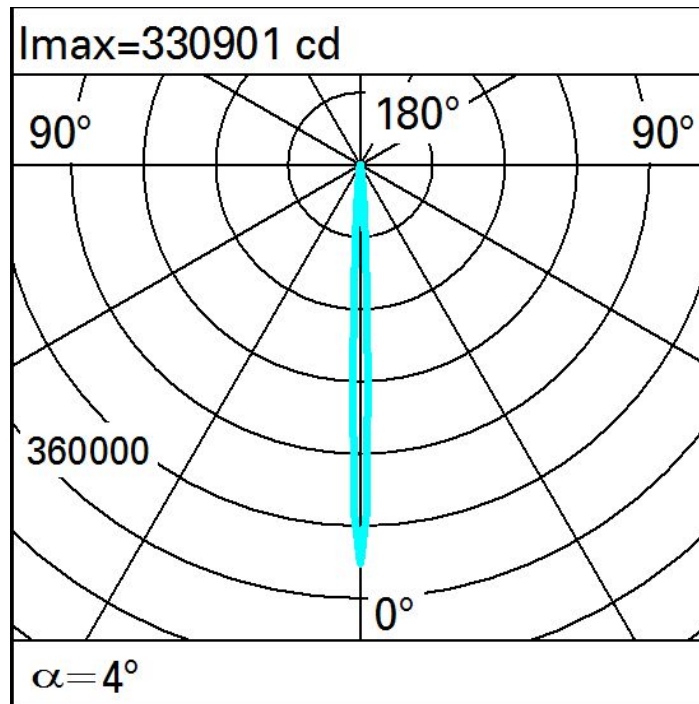

# Isolux

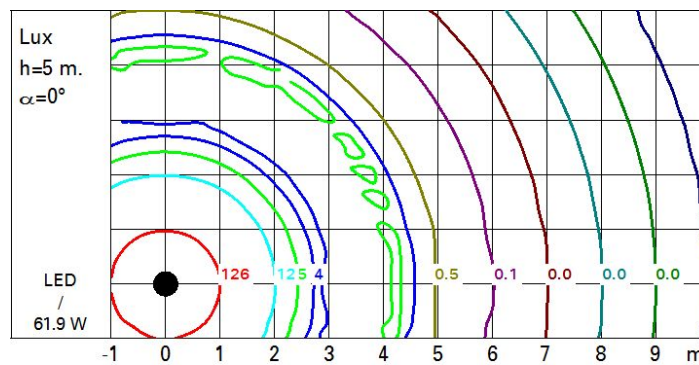

# Illuminances

