


Last information update: January 2026

**Product configuration: SL32+L394**

SL32: Nitia table lamp H=294.20

**Product code**

SL32: Nitia table lamp H=294.20

**Technical description**

Diffused light table illuminating body H=294.20mm. PMMA base (complete with counterweight to ensure stability) and transparent methacrylate screen. Stainless steel upper cover disc and power supply cable L = 2000 with plug and ON-OFF section breaker switch. The screen can be rotated around the main axis. E14 40W LED lamp included.

**Installation**

Table lamp

**Colour**

White (01) | Black (04) | Red (05)

**Weight (Kg)**

1.52

**Mounting**

table top


**Wiring**

Cable with section breaker switch and plug. E14 40W LED lamp included.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	169	Colour temperature [K]:	2700
W system:	4.3	MacAdam Step:	6
lm source:	470	Lamp code:	LED
W source:	4.3	Socket:	E14
Luminous efficiency (lm/W, real value):	39.3	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	91	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	36	Control:	On/off
CRI (minimum):	80		

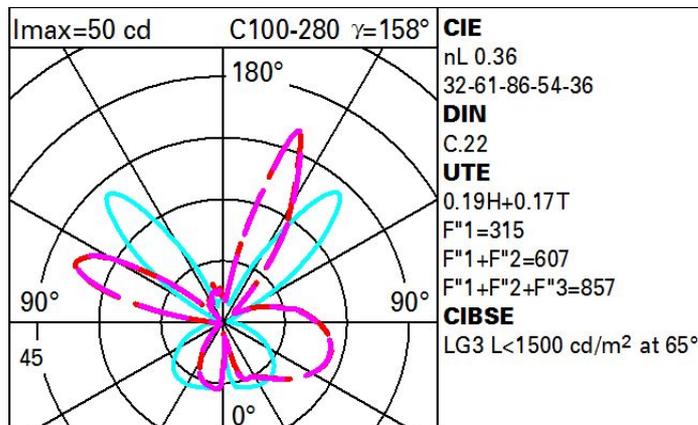**Polar**

## Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	18	15	12	10	13	10	9	5	27
1.0	21	17	14	12	15	12	11	6	33
1.5	24	21	18	16	18	16	14	9	46
2.0	26	23	21	19	20	18	16	11	55
2.5	27	25	23	21	21	20	17	12	61
3.0	28	26	24	23	22	21	18	13	66
4.0	29	28	26	25	24	23	19	14	72
5.0	30	29	27	26	25	24	20	15	77

---